

Front Wheel Opening Extension Pad Installation During PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports ASE Certification

Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2014	CT200H	

Introduction

The front wheel opening extension pad set (right and left front wheel opening extension pads, 6 self-tapping screws) is loaded in the luggage compartment at the assembly plant to avoid damage in transit.

Install the front wheel opening extension pads on the vehicle during Pre-Delivery Service (PDS).

Warranty Information

OP CODE	DESCRIPTION	TIME	OPF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-


Installation Procedure

1. Install the left and right front wheel opening extension pads with the supplied self-tapping screws.

HINT

There is a distinguishable mark on each pad indicating the left and the right side pad.

Figure 1.

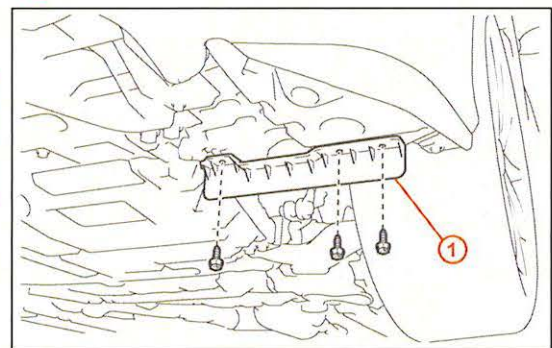

1 Front Wheel Opening Extension Pad