

S-SB-0019-14


August 7, 2014

Front Wheel Opening Extension Pad Installation During PDS

Service Category General

Section Pre-Delivery Service

Market USA

Scion Supports ASE Certification 

Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2015	iQ	

Introduction

The front wheel opening extension pad set (right and left front wheel opening extension pads, 4 screw clips) is loaded in the luggage compartment at the assembly plant to avoid damage in transit. Install the front wheel opening extension pads to the vehicle during Pre-Delivery Service (PDS).

Warranty Information

OP CODE	DESCRIPTION	TIME	ONP	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-


Installation Procedure

1. Remove the 2 tapping screws from the engine under cover, and remove the 2 screw clips from the front bumper and the fender liner.

HINT

- Do NOT dispose of the screws, they will be reused.
- The clips can be disposed of, they will not be reused.

Figure 1.

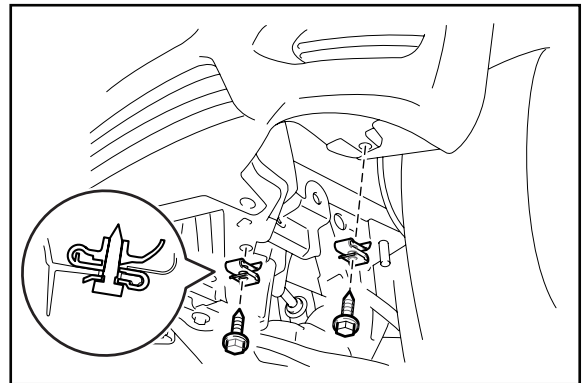

Front Wheel Opening Extension Pad Installation During PDS


Installation Procedure (Continued)

2. Install the new screw clips to the front bumper cover and the fender liner.

HINT

Be sure to install the extension pads using the NEW clips supplied.

Figure 2.

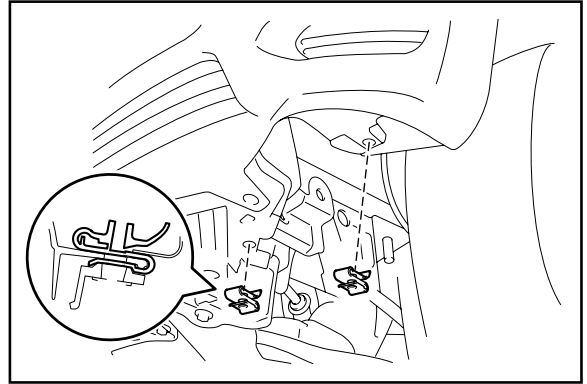


3. Align the front wheel opening extension pad holes with the screw clips and secure it with 2 tapping screws.

HINT

There is a distinguishable mark on each pad.

Figure 3.

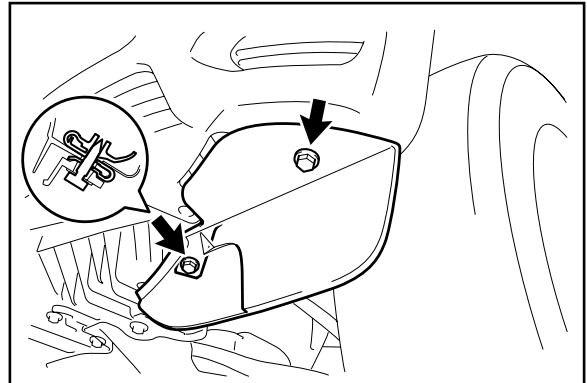

4. Repeat steps 1 – 3 to install the other front wheel opening extension pad.