

This Field Service Bulletin replaces bulletin FSB 222-004 dated 6.2015.

Date	Group	No.	Release	Page
1.2016	222	004	02	1(1)


Oil Filter Housing
D13H, D13J
VAH, VHD, VN

FSB 222-004, Oil Filter Housing

(January 2016)

The introduction of a new style oil filter housing requires replacement of the oil cooler inlet pipe when replacing the previous style housing on US2010 and US2014 emission VOLVO D13 engines with an engine serial number less than 1125655. Installation procedures remain the same, refer to Function Group 22 in Impact for proper installation. The updated oil filter housing went into production September 2015.

Previous Housing Part Numbers	New Style Housing Part Number	Pipe Part Number
21811042, 22095768	22108170	22026543

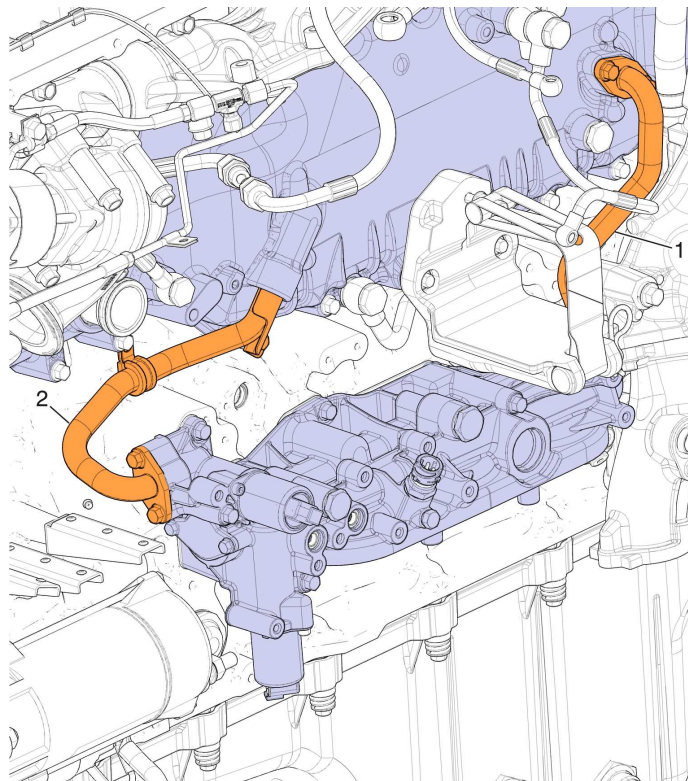

W2059284

- 1 Oil Cooler Outlet Pipe
- 2 Oil Cooler Inlet Pipe