Navigation Head Unit Precautions			Market USA
Service Category		Section	
Audio/Visual/Telema	atics	Audio/Video	
Applicability	lodels with Navigation I		
2010, $2010$ , $2010$ , $10$	iodels with Navigation i		
APPLICABLE VEHICL	E5		
2015-2018	RC F	2015-2018	RC350
2015-2018	NX300H	2010-2015	IS250C
2010	SC430	2012	LFA
2010-2016	LS600H	2010-2015	IS250
2016-2017	GS200T	2016-2018	IS300
2015-2017	NX200T	2010-2011	GS460
2010-2011, 2013- 2018	GS450H	2010-2012	HS250H
2013-2018	ES300H	2016-2018	GS F

2010-2017

2016-2018

2011-2018

2010-2018

2016-2017

2010-2014

2016-2017

## CONDITION

2010-2018

2010-2018

2010-2018

2010-2018

2010-2015

2018

2018

2010-2011, 2013-

2010-2011, 2013-

This bulletin is regarding best practices when handling navigation systems that use Hard Disc Drive or Micro SD Card memory.

 First type is generation 6 or 7 which utilizes HDD (Hard Disc Drive). Pioneer models that begin with NXH, have Map Data, Operating System and other Information in the Hard Disc Drive. With this system if a radio is being sent back for an exchange. The original Hard Disc Drive needs to be removed and installed into the newly serviced radio.



ES350

GX460

GS350

RX350

IS350C

LX570

RX450H

LS460

RC300

IS350


IS200T IS F

**RC200T** 

CT200H



 The Second type is Generation 8 Navigation system which utilizes the Micro SD Card. Pioneer models that begin with NXF, have map data in the Micro SD card. This is a customer accessible Micro SD card which can be found behind the front flip cover. The original Micro SD card should be removed and installed into the newly serviced radio.

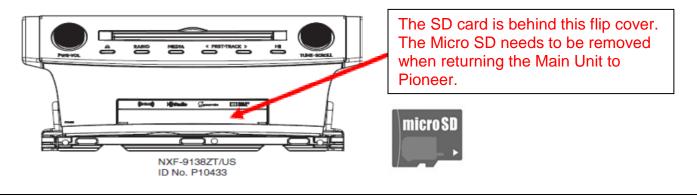

## RECOMMENDATIONS

There is another Micro SD card (*Operating System*) inside the Navigation Module. (Similar location to the Hard Disc Drive in the Generation 7 system). This micro SD Card <u>Should Not</u> be removed for any reason. Micro SD cards located in this internal slot need to be returned with the original radio.



© 2017, Lexus, a Division of Toyota Motor Sales, USA



## Tech Tip L-TT-0218-17

February 21, 2017

Navigation Head Unit Precautions

Market USA

13 CY 15CY Lexus Navigation Systems

RECOMMENDATIONS

This will void the Warranty status from Pioneer if removed and dealer will be debited the core credit.

## LINK REFERENCES

This Tech Tip does not contain any link references