



**NA\_MACK\_Vehicle\_Range**

**NA\_MACK\_Vehicle\_Range** LR , MRU , Anthem , CHU , CXU , GU  
**ge**

**Engine family**

Engine family MP7 , MP8

**Emission Standard**

Emission Standard 2018 , OBD2017 , US17 GHG


**\*\* SOLUTION \*\***

Title (customer effect) Mack Chassis - Diagnostic Trouble Code ( DTC ) P009E-73 - Fuel Pressure Relief Control Performance / Stuck Off - **US17+OBD16 And US17+OBD18 ( GHG17 ) Emissions (With Common Rail Fuel System), Commonly Model Years 2018 And 2019**

Cause GHG17 ( US17 ) chassis equipped with the common rail fuel system may set DTC P009E-73.

**Solution** **Verify the chassis emissions level**

- Details can be found in the Product Details box on the Product tab in PTT as seen below:

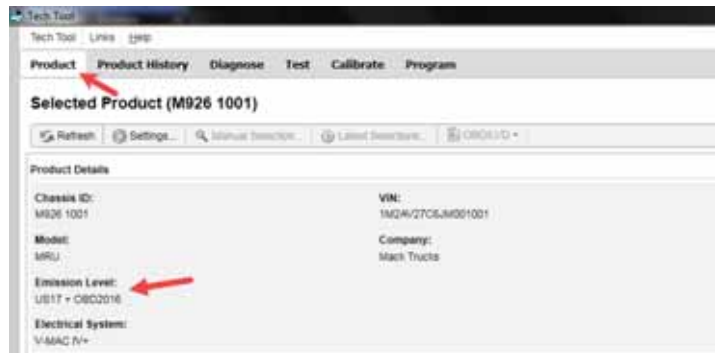

**Once Emissions Level is Confirmed:**

- Software improvements have been released to address this code. Refer to [FSB284-067 Engine Control Module \(ECM\) and Aftertreatment Control Module \(ACM\), Reprogramming.](#)

- This bulletin is current as of 17 April 2018.

**Campaign code** FSB284-067

**Solution visibility** **Dealer distribution**

**Function(s)/component(s) affected**

**Function affected** fuel supply , fuel system , 1 1 0 EMS , Diagnostic tool

## Function Group

Function Group 23 fuel system, excluding gas propulsion , 284 control system, fuel supply

### Customer effect

Main customer effect calibration/programming/pairing/missing operation , diagnostics/methodology , fault code/display

Fluid implicated fuel

Lights/Messages on information display  Driver's information warning pictogram

### Fault code(s)

OBD 2013 Diagnostic Trouble Codes P009E

### Conditions

Vehicle operating mode when driving , when stationary

Frequency of occurrence of problem random

### Administration

Author RU4469V

Dealer ID RU4469V

Last modified by RU4469V

Creation date 17-04-2018 22:04

Date of last update 17-04-2018 22:04

Review date 03-01-2018 00:01

Status Published