



NA_MACK_Vehicle_Range

NA_MACK_Vehicle_Range

LR , LEU , MRU , CHU , CXU , GU , TD

Engine family

Engine family MP7 , MP8 , MP10

Emission Standard

Emission Standard US16 , US15 , US14 GHG


**** SOLUTION ****

Title (customer effect) Mack Chassis - Diagnostic Trouble Code (DTC) P0507 Lighting The Malfunction Indicator Lamp (MIL) - **US14+OBD13, US14+OBD15, US14+OBD16 Emissions (Non-Common Rail Fuel System), Common Model Years 2015 To 2017**

Cause US14+OBD13, US14+OBD15, US14+OBD16 Emissions vehicles may log DTC P0507.

Solution **Verify the chassis emissions level**

- Details can be found in the Product Details box on the Product tab in PTT as seen below:

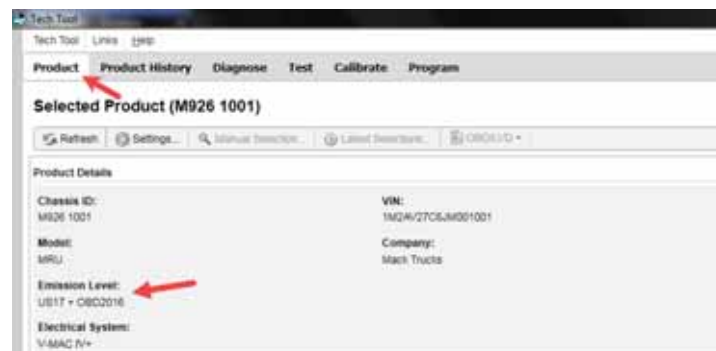

For US14+OBD13

- Refer to [FSB 284-066 Engine Control Module \(ECM\) and Aftertreatment Control Module \(ACM\). Reprogramming.](#)
 - This bulletin is current as of 17 April 2018.

For US14+OBD15

- Software improvements have been released to address this code. Refer to the table

below:

Action Required		
ECM	Main Software	Action Required
MP7 / MP8	Equal or Less Than 22741784	Update to Latest Software
MP10	Equal or Less Than 22644017	Update to Latest Software
ACM	Main Software	Action Required
MP7 / MP8 / MP10	Equal or Less Than 22741796	Update to Latest Software

For US14+OBD16

- Refer to [FSB 284-065 Engine Control Module \(ECM\) and Aftertreatment Control Module \(ACM\), Reprogramming](#).

- This bulletin is current as of 17 April 2018.

If any other symptoms or related codes are present, they will need to be diagnosed before P0507. P0507 will not cause any physical symptoms if it is generated by software.

Campaign code	FSB284-065, FSB284-066
Solution visibility	Dealer distribution
Function(s)/component(s) affected	
Function affected	FSB , engine , regulation (cruise control/engine speed) , 1 1 0 EMS
Function Group	
Function Group	28 ignition and control system
Customer effect	
Main customer effect	engine speed , calibration/programming/pairing/missing operation , diagnostics /methodology , efficiency/abnormal behavior , fault code/display
Lights/Messages on information display	 Driver's information warning pictogram
Fault code(s)	
OBD 2013 Diagnostic Trouble Codes	P0507
Conditions	
Vehicle operating mode	when stationary
Frequency of occurrence of problem	random
Administration	
Author	RU4469V
Dealer ID	RU4469V

Last modified by RU4469V

Creation date 19-04-2018 18:04

Date of last update 19-04-2018 19:04

Status Published
