


SUBJECT
Band Clamp for Exhaust Front Pipe Is Loose
MODEL

F30 (3 Series Sedan)

F31 (3 Series Sports Wagon)

F25 (X3)

With the N47T diesel engine

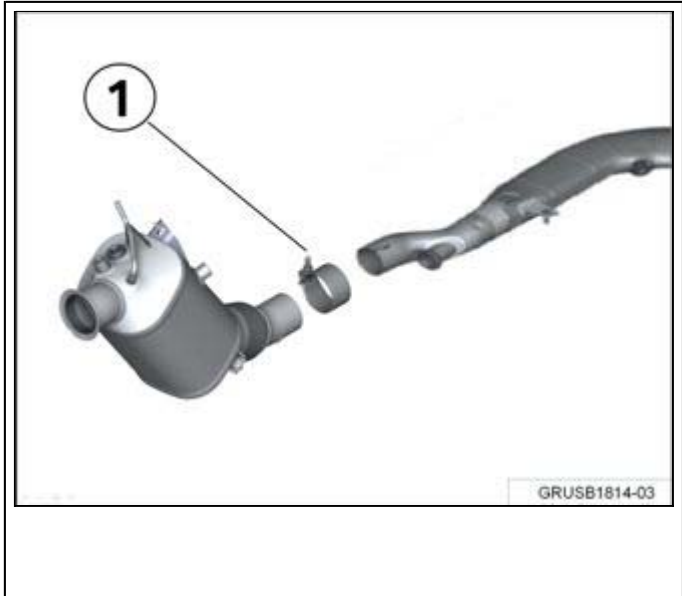
SITUATION

There is a rattle coming from the front of the exhaust system when the engine is running, or the exhaust system is leaking at the area of the front pipe to diesel particulate filter (DPF) connection.

CAUSE

The band clamp holding the exhaust front pipe to the DPF has come loose.

CORRECTION

	<p>The band clamp (1) is a one-time use only part. It must be replaced after any work performed that requires removal of the exhaust. The clamp will not hold its tightening torque when re-used.</p>
---	--

PARTS INFORMATION

Part Number	Description	Quantity
Refer to EPC	Exhaust clamp	1

WARRANTY INFORMATION

Not applicable.