



NUMBER: 23-020-15 REV. A

GROUP: Body

DATE: July 08, 2015

This bulletin is supplied as technical information only and is not an authorization for repair. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without written permission of FCA US LLC.

THIS BULLETIN SUPERSEDES SERVICE BULLETIN 23-020-15, DATED APRIL 09, 2015, WHICH SHOULD BE REMOVED FROM YOUR FILES. ALL REVISIONS ARE HIGHLIGHTED WITH **ASTERISKS**** AND INCLUDE A REVISED CLEAN DATE.**

THIS SERVICE BULLETIN IS ALSO BEING RELEASED AS RAPID RESPONSE TRANSMITTAL (RRT) 15-058. ALL APPLICABLE SOLD AND UN-SOLD RRT VIN'S HAVE BEEN LOADED. TO VERIFY THAT THIS RRT SERVICE ACTION IS APPLICABLE TO THE VEHICLE, USE VIP OR PERFORM A VIN SEARCH IN TECHCONNECT. ALL REPAIRS ARE REIMBURSABLE WITHIN THE PROVISIONS OF WARRANTY.

SUBJECT:

Replace Missing Manual Release Cover For The Electric Fuel Door

OVERVIEW:

This bulletin involves installing a cover for the fuel door manual release cable.

MODELS:

2015 (B1) Jeep Renegade (Latin America Vehicles Only)

NOTE: *This bulletin applies to vehicles built on or before May 25, 2015 (MDH 0525XX).*****

SYMPTOM/CONDITION:

The customer may describe a loose cable hanging in the right rear of the cargo compartment area.

DIAGNOSIS:

If a customer's VIN is listed in VIP or your RRT VIN list, perform the repair. For all other customers that describe the symptom/condition listed above, perform the Repair Procedure.

PARTS REQUIRED:

Qty.	Part No.	Description
1	735623051	Cover

REPAIR PROCEDURE:

1. Open the rear hatch (Fig. 1).



Fig. 1 Rear Hatch

2. If cover is not present and cable (1) is hanging perform the repair (Fig. 2).



Fig. 2 Loose Cable

1 - Cable

3. Install the cable (2) onto the new cover (1) (Fig. 3).

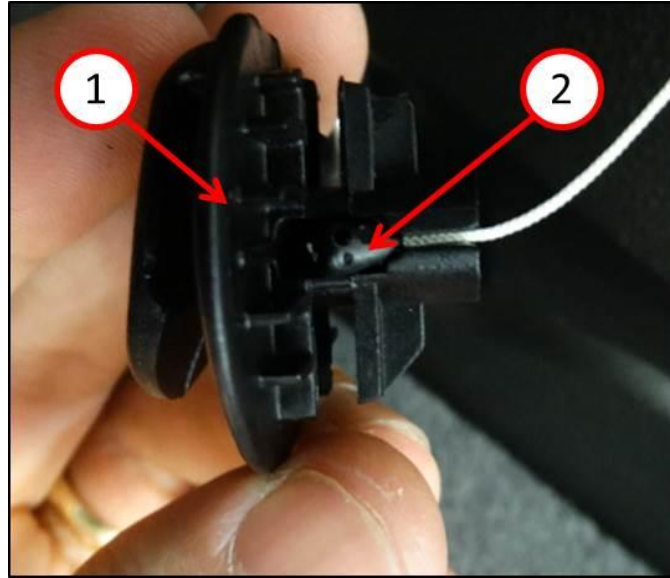


Fig. 3 Cable Insertion

- 1 - Cover
- 2 - Cable

-
4. Make sure the cable is fully inserted into the cover (1) as shown (Fig. 4).

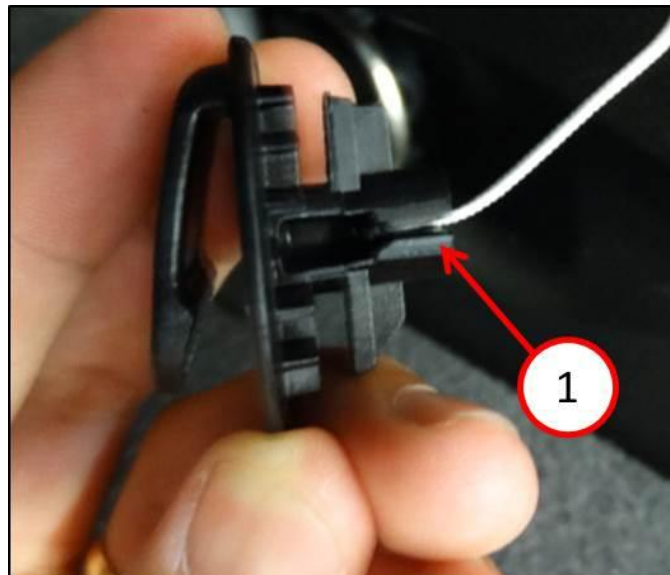


Fig. 4 Cable Fully Inserted Into Cover

- 1 - Cover
-

5. Install the cover and cable into trim cover as shown and turn the cover 90° counterclockwise until it's completely locked into place (Fig. 5).



Fig. 5 Installing Cover

6. Make sure the cover (1) is flush and installed properly (Fig. 6).



Fig. 6 Cover Installed

1 - Cover

POLICY:

Reimbursable within the provisions of the warranty.

TIME ALLOWANCE:

Labor Operation No:	Description	Skill Category	Amount
23-41-38-90	Install Release Cover for Manual Fuel Door (1 - Semi-Skilled)	6 - Electrical and Body Systems	0.2 Hrs.

FAILURE CODE:

ZZ	Service Action
----	----------------