



# Technical Service Bulletin

SUBJECT:		No: <b>TSB-18-42A-004</b>	
<b>UPDATES TO HOOD LATCH MOUNTING BOLT &amp; TIGHTENING TORQUE - SERVICE MANUAL REVISION</b>		DATE: <b>December 2018</b>	
		MODEL: <b>See below</b>	
<b>CIRCULATE TO:</b>	<input type="checkbox"/> GENERAL MANAGER	<input checked="" type="checkbox"/> PARTS MANAGER	<input checked="" type="checkbox"/> TECHNICIAN
<input checked="" type="checkbox"/> SERVICE ADVISOR	<input checked="" type="checkbox"/> SERVICE MANAGER	<input checked="" type="checkbox"/> WARRANTY PROCESSOR	<input type="checkbox"/> SALES MANAGER

## PURPOSE

This TSB updates the Body section of the affected Service Manuals to add the type of the hood latch mounting bolts and to correct the tightening torque for the hood.

## AFFECTED VEHICLES


- 2014 - 2019 Outlander
- 2011 - 2018 Outlander Sport
- 2018 Outlander PHEV
- 2018 Eclipse Cross

## AFFECTED SERVICE MANUAL

- 2014 - 2019 Outlander Service Manual, Group 42 - Body
- 2011 - 2018 Outlander Sport Service Manual, Group 42 - Body
- 2018 Outlander PHEV Service Manual, Group 42 - Body
- 2018 Eclipse Cross Service Manual, Group 42 - Body



Please make the indicated changes to the 2014 - 2019 Outlander, 2011 - 2018 Outlander Sport, 2018 Outlander PHEV Service Manual, Group 42 - Body -> Body ->Hood -> Adjustment of Hood Level and Hood Striker Engagement.

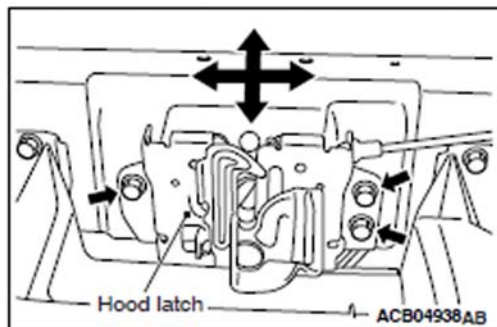

2. Loosen the hood latch mounting bolts but do not remove them. Move the hood latch up/down and left/right to align the hood level and adjust the hood striker engagement.

3. After the adjustment, tighten the hood latch mounting bolts to  $9.0 \pm 1.0 \text{ N}\cdot\text{m}$  ( $80 \pm 8 \text{ in}\cdot\text{lb}$ ).

<Old>

<New> to specified torque.

**Tightening torque:**

$9.0 \pm 1.0 \text{ N}\cdot\text{m}$  ( $80 \pm 8 \text{ in}\cdot\text{lb}$ ): Washer assembly bolt

$11 \pm 1 \text{ N}\cdot\text{m}$  ( $97 \pm 8 \text{ in}\cdot\text{lb}$ ): Flange bolt

Please make the indicated changes to the 2014 - 2019 Outlander, 2011 - 2018 Outlander Sport, 2018 Outlander PHEV Service Manual, Group 42 - Body -> Hood -> Removal and Installation.

