



# SERVICE BULLETIN

Classification: EM20-007a	Reference: NTB20-043a	Date: January 22, 2021
------------------------------	--------------------------	---------------------------

## 2014-2020 ROGUE; AIR DUCT REPLACEMENT

This bulletin has been amended. See **AMENDMENT HISTORY** on the last page.  
Please discard previous versions of this bulletin.

**APPLIED VEHICLES:** 2014-2020 Rogue (T32)

**NOTE:** This bulletin does not apply to Rogue Hybrid (T32H).

### IF YOU CONFIRM

Air duct 1, air duct 2, or the air cleaner cover shown in Figure 1 needs to be replaced.

### ACTION

Inspect for a clip in the location shown in Figure 1 and Figure 2.

- If a clip is present, then the vehicle **IS** equipped with the updated parts; no further action is needed. Individual parts may be replaced as needed.
- If a clip is **NOT** present, then the vehicle is equipped with older parts. See **SERVICE PROCEDURE** on the next page.

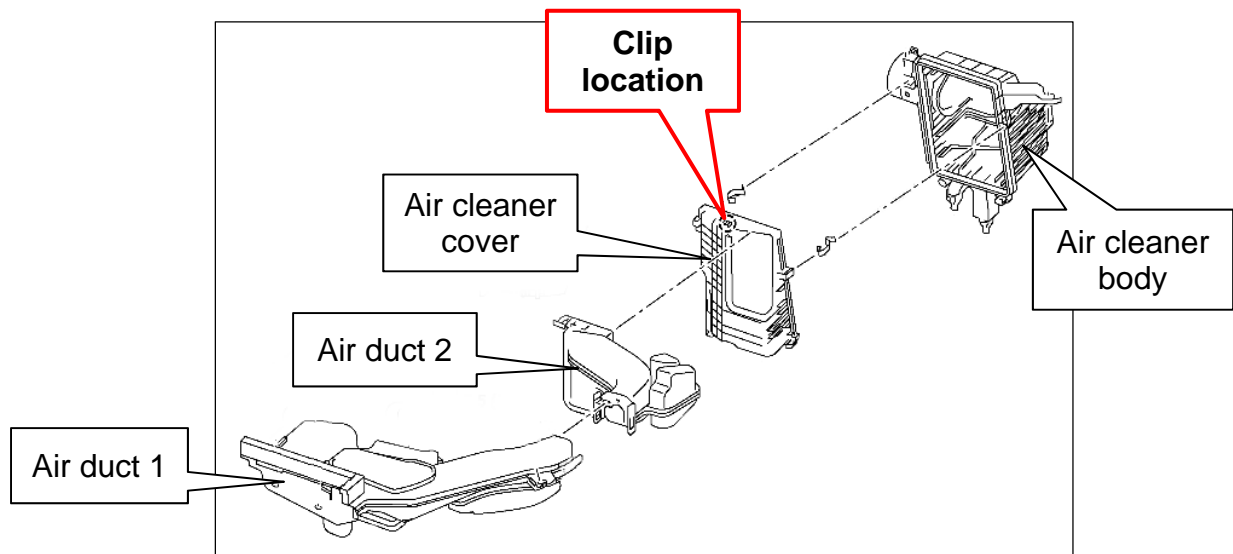


Figure 1

**IMPORTANT:** The purpose of ACTION (above) is to give you a quick idea of the work you will be performing. You **MUST** closely follow the entire **SERVICE PROCEDURE** as it contains information that is essential to successfully completing this repair.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, **DO NOT** assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

## SERVICE PROCEDURE

1. Inspect the air cleaner body for a clip in the location shown in Figure 1 and Figure 2.
  - If a clip is present, then the vehicle is equipped with the updated parts; no further action is needed. Individual parts may be replaced as needed.
  - If a clip is **NOT** present, then the vehicle is equipped with older parts. All components listed in the **PARTS INFORMATION** section must be replaced.
    - For removal and installation, refer to the Electronic Service Manual (ESM) section: **REPAIR > ENGINE > ENGINE MECHANICAL > REMOVAL AND INSTALLATION > AIR CLEANER AND AIR DUCT.**
2. Install the new clip into the location shown in Figure 2.

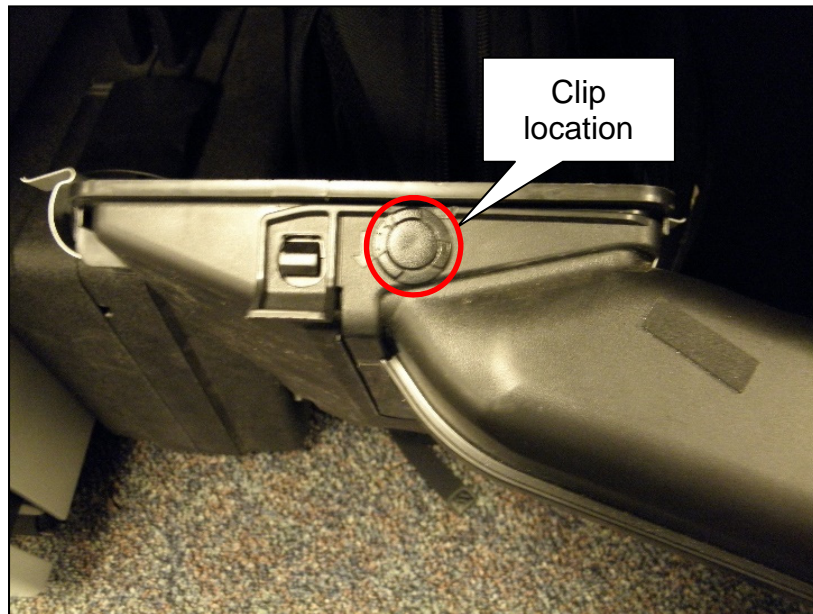


Figure 2

## PARTS INFORMATION

DESCRIPTION	PART NUMBER	QUANTITY
DUCT ASSY-AIR DUST, SIDE	16554-4BA2C	1
DUCT ASSY-AIR DUST, SIDE	16554-4BA2E	1
CLNR ASSY-AIR	16500-4BA5D	1
CLIP TRIM	01553-2DR9A	1

## CLAIMS INFORMATION

Submit a Primary Part (PP) type line claim using the following claims coding:

DESCRIPTION	PFP	OP CODE	SYM	DIA	FRT
Install parts listed in PARTS INFORMATION <b>Only If Needed</b>	(1)	DA30AA	ZE	41	(2)

- (1) Reference the electronic parts catalog and use the Air Duct Assy. (16554-\*\*\*\*\*) as the Primary Failed Part (PFP).
- (2) Reference the current Nissan Warranty Flat Rate Manual and use the indicated Flat Rate Time (FRT).

## AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
June 18, 2020	NTB20-043	Original bulletin published
January 22, 2021	NTB20-043a	Changes to APPLIED VEHICLES.