



# Technical Service Bulletin

## PSS 91 MIB3: MMI display turns blue

91 21 46 2063702/3 October 26, 2021. Supersedes Technical Service Bulletin Group 91 number 21-40 dated October 13, 2021 for reasons listed below.

Model(s)	Year	VIN Range	Vehicle-Specific Equipment
A4, A4 allroad, S4, A5, A5 Cabriolet, A5 sportback, S5, S5 Cabriolet, S5 sportback, RS 5, RS 5 Cabriolet, RS 5 sportback, A6, A6 allroad, A6 Avant, S6, RS 6 Avant, A7, S7, RS 7, A8, S8, Q5, SQ5, Q7, SQ7, Q8, SQ8, RS Q8, Audi e-tron quattro, and Audi e-tron sportback quattro	2021	All	MIB3
Audi e-tron GT	2022	000001 - 002735	MIB3

## Condition

REVISION HISTORY		
Revision	Date	Purpose
3	-	Revised <i>Service</i> (Updated expected release date)
2	10/13/2021	Revised header (Added Models)
1	06/21/2021	Initial publication




# Technical Service Bulletin

---

**Customer states:**

- The MMI display turns completely blue (Figures 1 - 2).

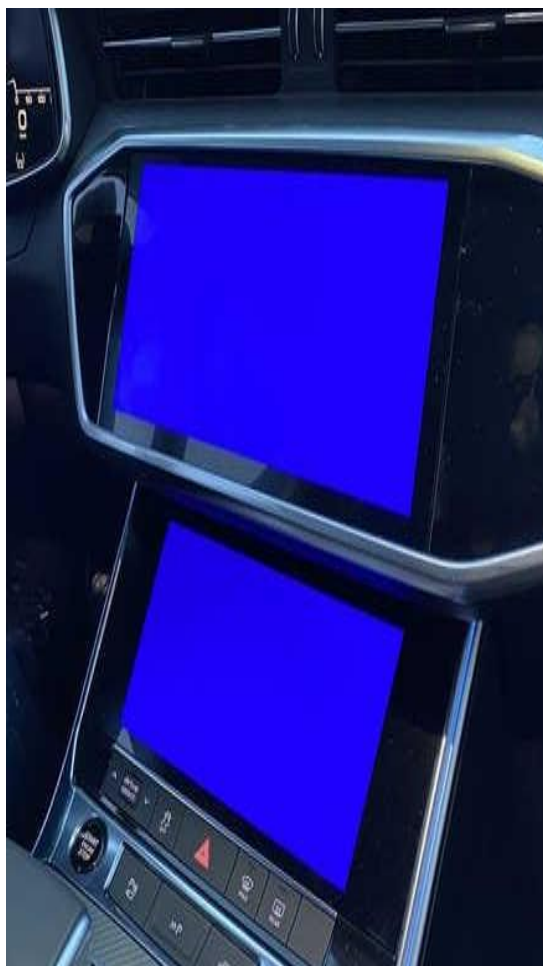

*Figure 1. Dual screen vehicle.*



*Figure 2. Single screen vehicle.*



# Technical Service Bulletin

---

## Technical Background

An issue in the display driver can cause the displays to turn blue.

## Production Solution

Updated software implemented in MY22.

## Service

1. **Workaround:** Reset the MMI by pushing the On/Off/Volume button for 10 seconds or more. The MMI will reboot and should work normally afterward.
2. Explain to the customer that a permanent solution is forthcoming for the 1st quarter of 2023 and that no repairs are necessary at this point. Do not replace any components for this condition since this will not resolve the customer's concern.
3. Create a PSS record in the PSS application through the Pending Service Solutions (PSS) link in AccessAudi (under *Related Links* >> *Service*), or through the Technical Assistance page in Elsa.

## Warranty

This TSB is informational only and not applicable to any Audi Warranty.

## Additional Information

All part and service references provided in this TSB (2063702) are subject to change and/or removal. Always check with your Parts Department and/or ETKA for the latest information and parts bulletins. Please check the Repair Manual for fasteners, bolts, nuts, and screws that require replacement during the repair.

©2021 Audi of America, Inc. All rights reserved. The information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Audi of America, Inc., its affiliated companies, and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites, without the prior expressed written permission of the publisher.