


Title:	Husky 3 Foam Pump – GEN 1 Pump Discontinued			
Number:	SB_446.1	Release Date:	06/24/2019	
Revision Number:	1	Revision Date:	04/18/2022	
Chassis Type:	All chassis types			
Component Description:	Husky 3 Foam pump redesign, Gen 1 to Gen 2			
Warranty:	Not Applicable			
Parts:	*Discontinued* GEN 1 Husky pump (Pierce p/n 2851584) GEN 2 Husky pump (Pierce p/n 3267102) GEN 1 to GEN 2 Conversion kit (Pierce p/n 3411256)			
Tools:	n/a			

Subject:


The GEN 1 Husky 3 foam pump from FSC is being discontinued. To keep supporting our customers, a conversion kit is available to install the GEN 2 Husky 3 foam pump in place of the GEN 1.

Purpose:

To communicate with the Pierce dealer network and customers that a conversion kit is available to replace the discontinued GEN 1 pump when a replacement is needed.

Description:

The discontinued GEN 1 Husky 3 pump (Pierce p/n 2851584) uses a blue box signal conditioner for the position transducer in the foam pump. The GEN 2 Husky 3 pump (Pierce p/n 3267102) uses a transducer that does not require a signal conditioner. (See Figure 1)

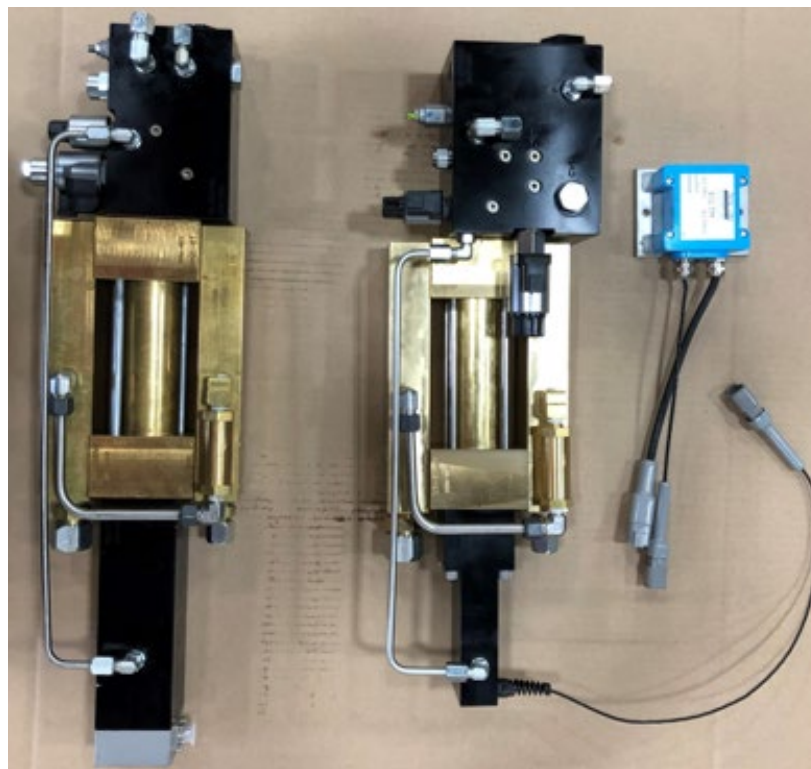

GEN 2
(pn 3267102)

GEN 1
(pn 2851584)

Figure 1

SERVICE BULLETIN #446.1

In the event you need to replace a GEN 1 pump, a conversion kit is available which includes the GEN 2 pump and two harnesses which will allow a direct install.

- Discontinued Pump = GEN 1 Husky 3 pump (Pierce p/n 2851584)
- New Pump = GEN 2 Husky 3 Pump (Pierce p/n 3267102)
- Conversion kit from GEN 1 to GEN 2 Husky 3 Pump (Pierce p/n 3411256)
 - 1pc GEN 2 Husky 3 Pump (Pierce p/n 3267102)
 - 1pc Linear Feedback Sensor Adaptor Harness (Pierce p/n 3599440)
 - 1pc Signal Conditioner Delete Adaptor Harness (Pierce p/n 3599442)

Work Instruction Location:

Installation of the GEN 1 to GEN 2 Husky 3 instructions can be located on Pierceparts.com under “Technical Support”. See Figure 2.

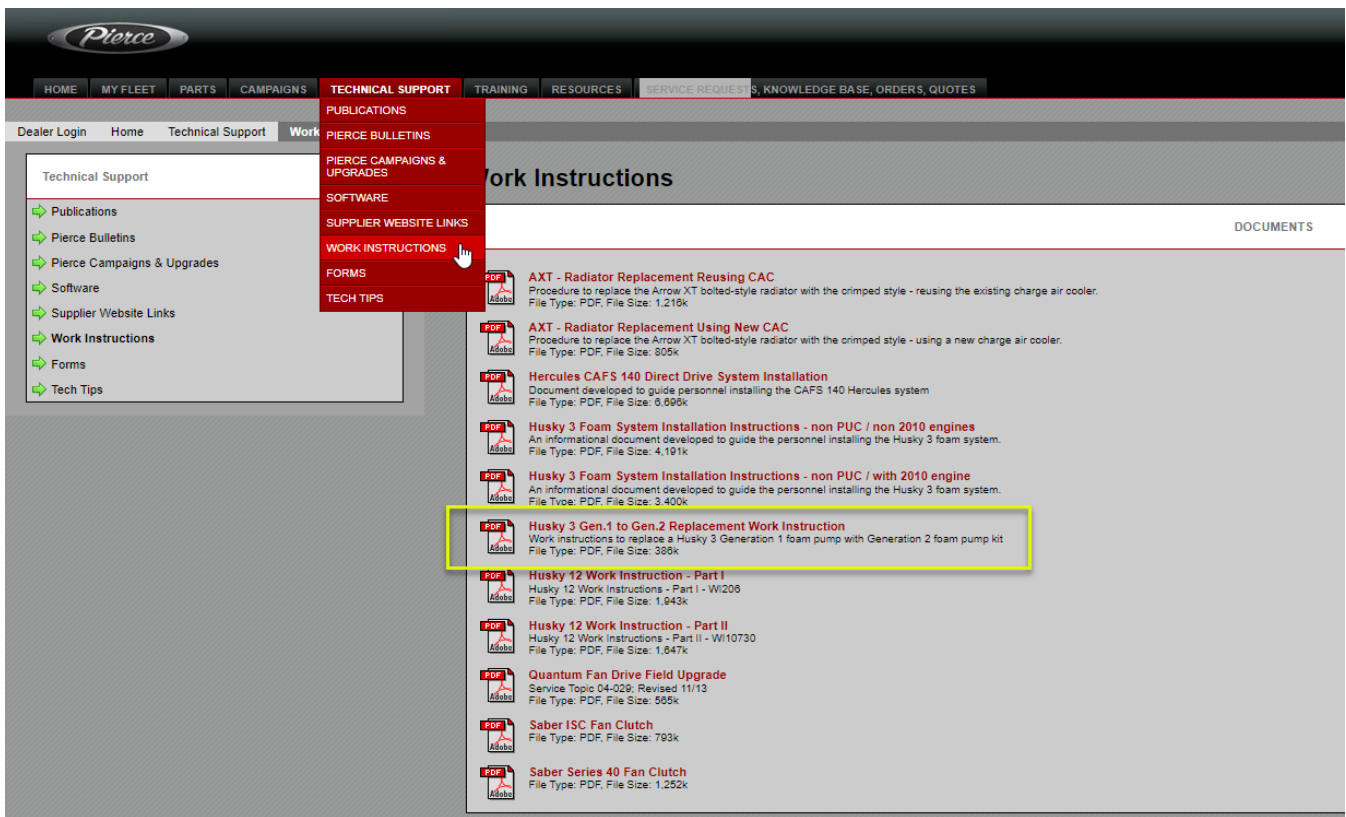


Figure 2

If any additional support is needed, please open a technical support incident on Pierceparts.com.