

<b>Subject:</b>  <b>FRONT / REAR STABILIZER NOISE PREVENTION</b>	<b>Bulletin No:</b> 02-005/16
	<b>Last Issued:</b> 02/17/2016

## BULLETIN NOTE

This bulletin supersedes the previously issued bulletin(s) listed below. The changes are noted in Red beside the change bars.


Previous TSBs:	Date(s) Issued:
02-006/13	06/04/13 and 11/25/13

## APPLICABLE MODEL(S)/VINS

2016 CX-3  
 2013-2016 CX-5  
 2016 CX-9  
 2016 Mazda2  
 2014-2016 Mazda3  
 2014-2016 Mazda6

## DESCRIPTION

Beginning with the newer models (CX-5 and Mazda6), grip type front and rear stabilizer bushings (A) have been incorporated for noise prevention purposes. If any type of grease or lubrication is applied to the bushings, it may create noise due to bushing slippage (CX-5 front bushings shown below).

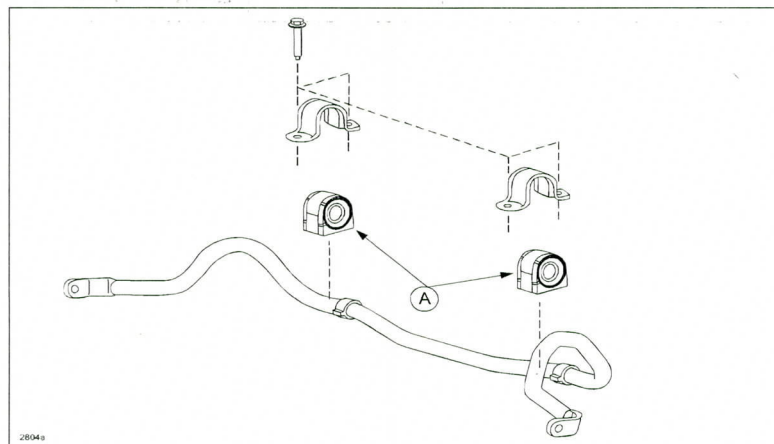

**NOTE:** To prevent noise from occurring, never apply any type of grease or lubrication to the front or rear stabilizer bushings.

**CONSUMER NOTICE:** The information and instructions in this bulletin are intended for use by skilled technicians. Mazda technicians utilize the proper tools/equipment and take training to correctly and safely maintain Mazda vehicles. These instructions should not be performed by "do-it-yourselfers." Customers should not assume this bulletin applies to their vehicle or that their vehicle will develop the described concern. To determine if the information applies, customers should contact their nearest authorized Mazda dealership. Mazda North American Operations reserves the right to alter the specifications and contents of this bulletin without obligation or advance notice. All rights reserved. No part of this bulletin may be reproduced in any form or by any means, electronic or mechanical---including photocopying and recording and the use of any kind of information storage and retrieval system ---without permission in writing.