



# Service Bulletin

Bulletin No.: 22-NA-198

Date: October, 2023


## INFORMATION

**Subject:** Information on Dimpling of Front Fascia Due to Incorrect Front Splitter Fasteners Installed at PDI

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Chevrolet	Corvette Z06	2023	2024	—	—	—	—

Involved Region or Country	North America, Europe, Middle East, Japan, Australia/New Zealand
----------------------------	--

### Service Procedure

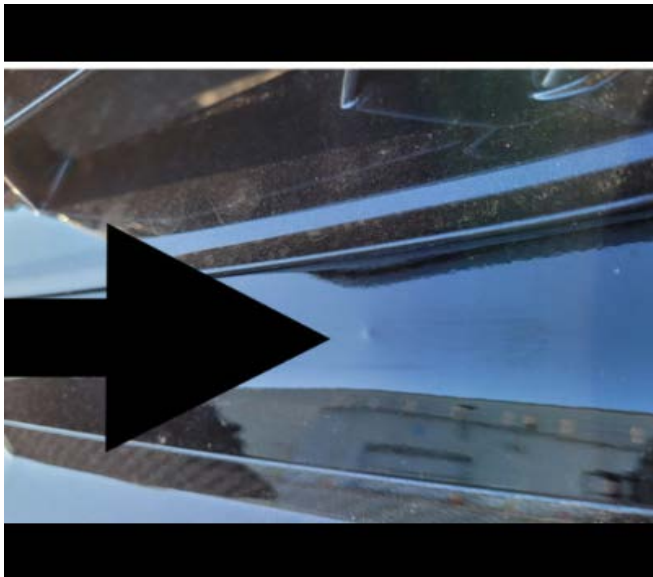

6163496




6163499

**Important:** Service agents must comply with all International, Federal, State, Provincial, and/or Local laws applicable to the activities it performs under this bulletin, including but not limited to handling, deploying, preparing, classifying, packaging, marking, labeling, and shipping dangerous goods. In the event of a conflict between the procedures set forth in this bulletin and the laws that apply to your dealership, you must follow those applicable laws.

During the installation of the front splitter kit, it is important to install using the correct fasteners.

There are four long fasteners included in the front splitter kit. They should **NOT** be used due to the longer fasteners possibly creating a dimple on the front fascia.

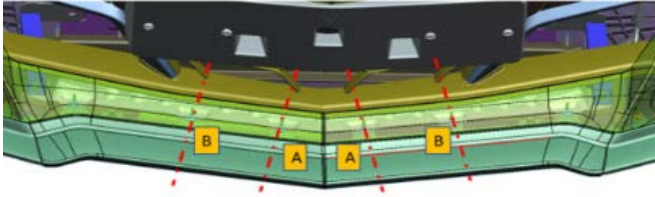

6163500

Fasteners A and B — Should use part number 11547755

**Important:** There will be 4 extra bolts of Part Number 11589012 in the original hardware kit after performing installation. These bolts can be discarded.

<b>Version</b>	2
<b>Modified</b>	Released October 06, 2022 Revised October 05, 2023 – Added the 2024 Model Year and added Europe and Japan to the Involved Region or Country section.

