

## X167 GLS600 Maybach - CCR tablet cannot be connected to the MBUX


---


Topic number	LI82.60-P-076966
Version	1
Function group	82.60 - Radio, audio, video systems
Date	10/9/23
Validity	Mercedes-Maybach GLS 600 with code 447
Reason for change	

---

### Complaint

CCR (rear) tablet does not connect to the MBUX (see attachments)

Attachments	
File	Description
<a href="#">correct SCN.PNG</a>	View with correct coding
	
<a href="#">wrong SCN.PNG</a>	View with incorrect coding

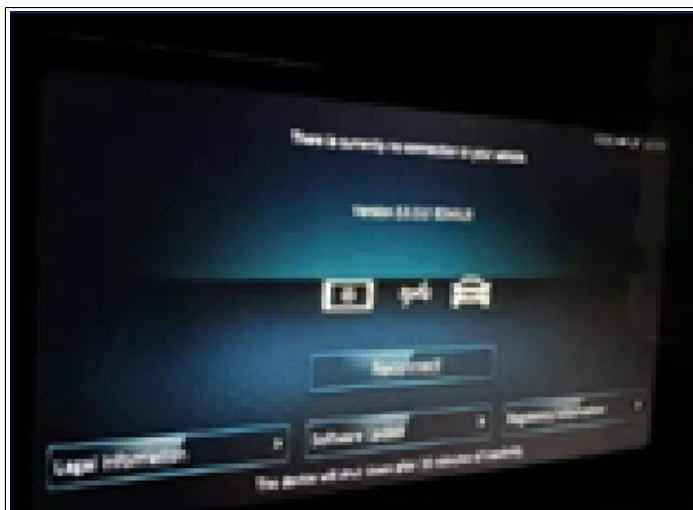

## Cause

SCN Coding in tablet cradle A105/6 (TAS)

## Remedy

Perform scn coding in the tablet cradle A105/6 (TAS)

### Symptoms

Communication/information > Entertainment > Rear entertainment > Control > Rear entertainment system completely nonfunctional

### Operation numbers/damage codes

Op. no.	Operation text	Time	Damage code	Note
			820FE	