



An Oshkosh Corporation Company

GENERAL BULLETIN GB2023003 CMD.CTRL™ P2.1 and P2.2 SOFTWARE UPDATE

Subject:	CMD.CTRL™ P2.1 and P2.2 Software Update
Attn:	IMT Distributors
From:	IMT Tech Support
Date:	January 11, 2024
Affected Models:	Series 4 Mechanics Bodies and Cranes

Why are you receiving this bulletin?

IMT has recently released software updates for all CMD.CTRL™ displays (software update 2.1), body modules (software update 2.2), and crane modules (software update 2.2). These software updates prevent cross-compatibility between previous revision P1.XX and new revision P2.XX; requiring all components to have uniform top-level software specified by either P1 or P2. Any values following the decimal are to be disregarded as they have no effect on component compatibility. This update includes added selections for rotary screw and piston compressors and performs several other background system enhancements.

What should you do?

Verify current revision of software on CMD.CTRL™ display, body module, and crane module. See attached instructions.

Part Number	Description
77040741	CONTROLLER- BODY MODULE S4
77040742	CONTROLLER- CRANE MODULE S4
77040743	DISPLAY- WITH KEYPAD S4

If during upfit it is determined any components are at a previous software revision, proceed in updating all components to the latest revision, P2.1(Display) and P2.2 (Body and Crane). IMT recommends updating both modules and display to the latest software revision regardless of current software installed.

What will we do?

IMT has begun implementing the new revision of software for quantities on hand. Bodies and cranes shipped after **1/29/2024** will include the new software installed for all components. A copy of the latest software and required instructions will be uploaded to the Distributor Resource Center website to aid in updating necessary components.

Do you have questions?

If you have any questions or need additional assistance, please contact IMT Technical Support at 1-800-554-4421 or 641-923-4633.

Iowa Mold Tooling Co., Inc.
500 Highway 18 West • P.O. Box 189 • Garner, IA 50438-0189
641-923-3711 • 641-923-6063 (Fax)




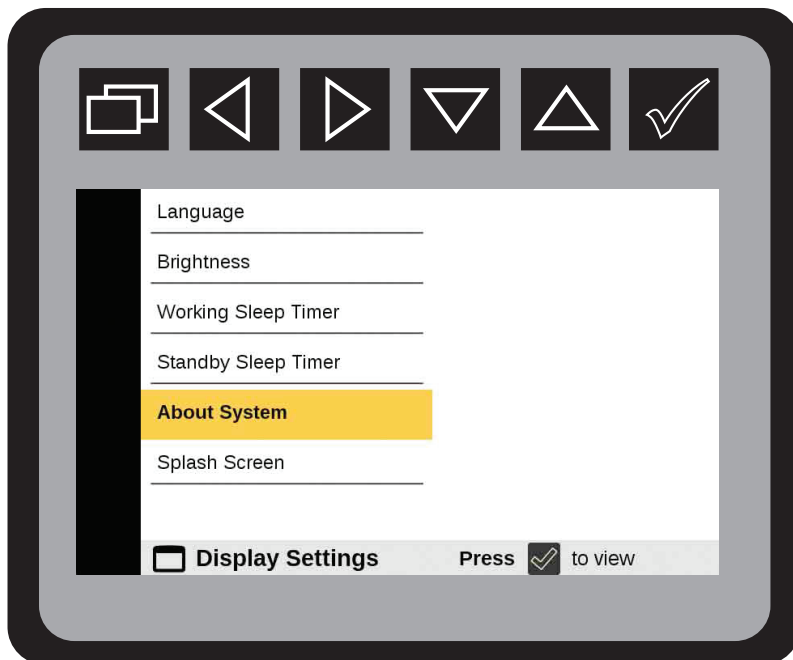
An Oshkosh Corporation Company

Verify current revision of software:

1. From the **Main Menu** navigate to **Display Settings**.




2. Press  and navigate to **About System**.



Iowa Mold Tooling Co., Inc.
500 Highway 18 West • P.O. Box 189 • Garner, IA 50438-0189
641-923-3711 • 641-923-6063 (Fax)



An Oshkosh Corporation Company

3. Press  to initiate **About System** state.
4. Verify software revision on Display, Body Module, and Crane Module all contain identical top-level Version levels.

