

SB-10052476-5043**CATERPILLAR****Service Information System**

Shutdown SIS

Previous Screen

◀ Product: NO EQUIPMENT SELECTED
 Model: NO EQUIPMENT SELECTED
 Configuration: NO EQUIPMENT SELECTED

Technical Information Bulletin**Required Parts Needed for Attaching New Fuel Sender to the CT660 On Highway Truck {7000}**

Media Number -TIBU7108-00

Publication Date -29/05/2013

Date Updated -29/05/2013

Caterpillar: Confidential Yellow

i05349515

Required Parts Needed for Attaching New Fuel Sender to the CT660 On Highway Truck{7000}

SMCS - 7000

On Highway Truck:

CT660 (S/N: TRK1-UP; TKL1-UP; TGT1-UP; TSW1-UP; TSY1-UP; TJS1-UP)

Introduction

Three parts are required to connect updated fuel sender to the truck harness.

Problem

Early version of fuel sender had pigtail style connector. New style has a fixed style connector that requires three additional parts to connect to harness.

Solution

Trucks that were built with a pigtail, and you receive a fuel sender without a pigtail you will need three additional parts to make the existing truck harness mate with the fuel sender.

Table 1

Item	Qty	New Part Number	Part Name
1	1	396-2766	Body - Connector
2	1	396-2770	Terminal - Female

3	1	422-4504	Harness Assembly Jumper
---	---	----------	-------------------------



Old Style

Illustration 1

g03388383

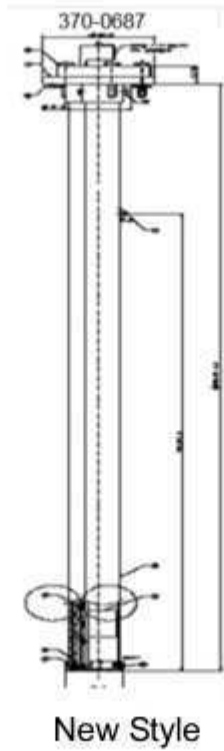


Illustration 2

g03388384

[Copyright 1993 - 2013 Caterpillar Inc.](#)
[All Rights Reserved.](#)
[Private Network For SIS Licensees.](#)

Wed Jun 5 11:53:40 CDT 2013