



SERVICE BULLETIN

Classification: EM13-007a	Reference: NTB14-003a	Date: December 17, 2014
------------------------------	--------------------------	----------------------------

2013-2014 SENTRA; ENGINE UPPER TORQUE ROD SERVICE INFORMATION

The Title, APPLIED VEHICLES, and SERVICE INFORMATION have been amended.
Please discard previous versions of this bulletin.

APPLIED VEHICLE: 2013-2014 Sentra (B17)

APPLIED VINs and

DATES: See **SERVICE INFORMATION**

SERVICE INFORMATION

This bulletin explains the application of the passenger side upper torque rod for all **APPLIED VEHICLES**.

2013 Sentra: All models are equipped with an upper torque rod.

- These vehicles have an engine mounting insulator that requires an upper torque rod.

2014 Sentra: All SV, SL, and SR models **DO NOT HAVE** an upper torque rod. **DO NOT INSTALL an upper torque rod on these models for any reason.**

- These vehicles have a redesigned engine mounting insulator that does not require an upper torque rod.

* **2014 Sentra:** S models built BEFORE 3N1AB7AP(*)EL 606447 and November 2, 2013 are equipped with an upper torque rod.

- These vehicles have an engine mounting insulator that requires an upper torque rod.

2014 Sentra: S models built ON and AFTER 3N1AB7AP(*)EL 606447 and November 2, 2013 **DO NOT HAVE** an upper torque rod. **DO NOT INSTALL an upper torque rod on these models for any reason.**

- These vehicles have a redesigned engine mounting insulator that does not require an upper torque rod.

See photos on the next page.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, **DO NOT** assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

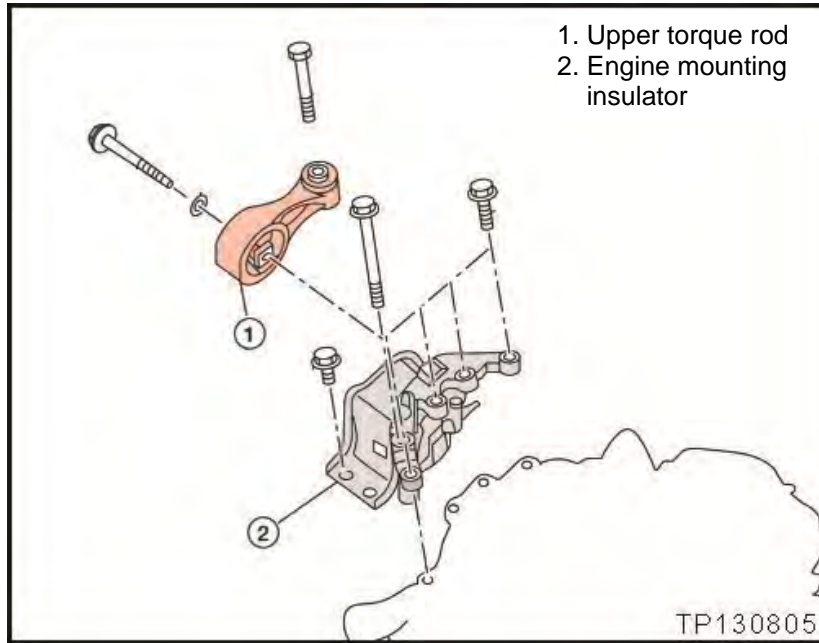


Figure 1



Figure 2

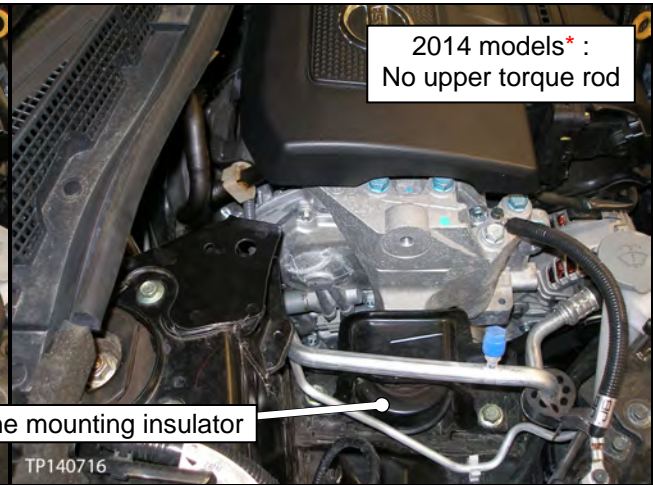


Figure 3

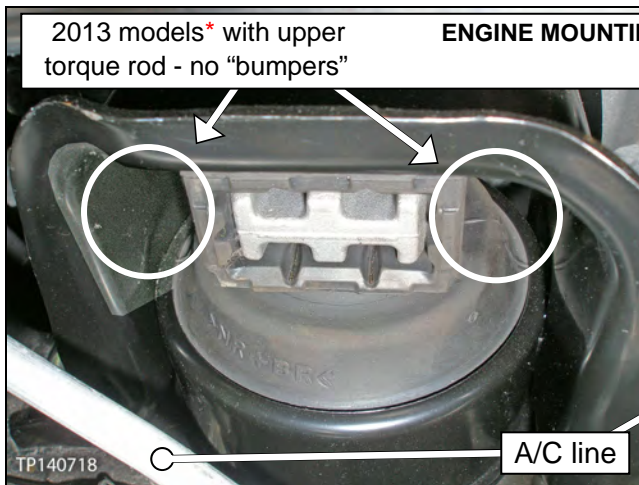


Figure 4

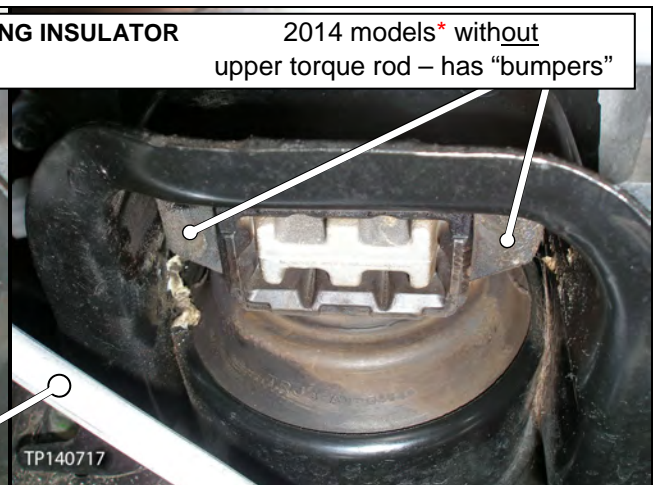


Figure 5

* See page 1.