

ATTENTION:
 GENERAL MANAGER
 PARTS MANAGER
 CLAIMS PERSONNEL
 SERVICE MANAGER

IMPORTANT - All Service Personnel Should Read and Initial in the boxes provided, right.



QUALITY DRIVEN® SERVICE

SERVICE BULLETIN

APPLICABILITY: 2010-2014MY Legacy and Outback Models

NUMBER: 12-166-14

SUBJECT: Revised L/Front Dash Speaker Grille

DATE: 03/03/14

INTRODUCTION


A design change has been made to the retaining hook and reinforcement rib portions of the left front dash speaker grille to increase retention and maintain proper fit to the dashboard trim.

COUNTERMEASURE IN PRODUCTION

The new speaker grille was incorporated into production during October, 2013 starting with the following VINs: Legacy- **E*015842** and Outback- **E*240453**.

PART INFORMATION

PART NAME	NEW PART NUMBER
GRILLE-SPEAKER, SIDE	66119AJ06A

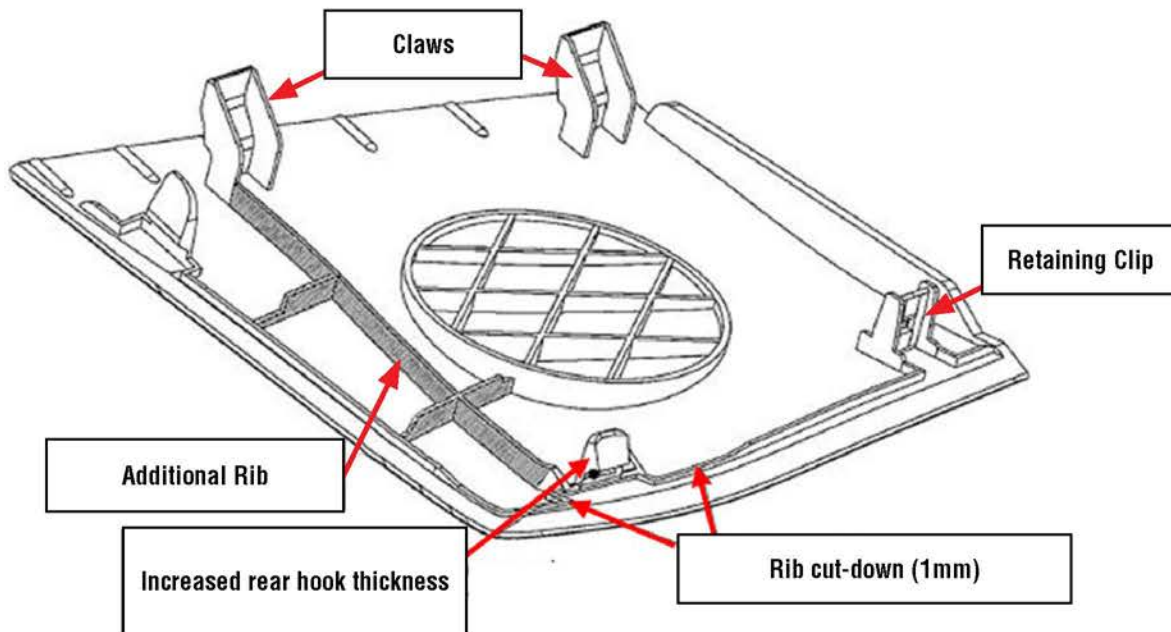

Continued...

CAUTION: VEHICLE SERVICING PERFORMED BY UNTRAINED PERSONS COULD RESULT IN SERIOUS INJURY TO THOSE PERSONS OR TO OTHERS.

Subaru Service Bulletins are intended for use by professional technicians ONLY. They are written to inform those technicians of conditions that may occur in some vehicles, or to provide information that could assist in the proper servicing of the vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do the job correctly and safely. If a condition is described, DO NOT assume that this Service Bulletin applies to your vehicle, or that your vehicle will have that condition.

SUBARU OF AMERICA, INC. IS "ISO 14001 COMPLIANT"

The international standard for excellence in Environmental Management Systems. Please recycle or dispose of automotive products in a manner that is friendly to our environment and in accordance with all local, state and federal laws and regulations.

SERVICE PROCEDURE / INFORMATION

Use a plastic trim tool to **CAREFULLY** remove the old speaker grille from the dash as shown below. Install the new grille by inserting the 2 front claws into their holes in the dash structure closest to the windshield first. After the rear hook and the retaining clip are secure, confirm proper retention and fit.



WARRANTY / CLAIM INFORMATION

For vehicles within the Basic New Car Limited Warranty period, this repair may be claimed using the following information:

LABOR DESCRIPTION	LABOR OPERATION #	FAIL CODE	LABOR TIME
ONE DASH SPEAKER GRILLE R&R	A911-471	YMS-48	0.2

Continued...