

TECHNICAL BULLETIN  
K248 UPS5714-1bNAS2  
15 OCT 2014



© Jaguar Land Rover North America, LLC

NOTE: The information in Technical Bulletins is intended for use by trained, professional Technicians with the knowledge, tools, and equipment required to do the job properly and safely. It informs these Technicians of conditions that may occur on some vehicles, or provides information that could assist in proper vehicle service. The procedures should not be performed by 'do-it-yourselfers'. If you are not a Retailer, do not assume that a condition described affects your vehicle. Contact an authorized Jaguar service facility to determine whether this bulletin applies to a specific vehicle.

Changes are highlighted in gray

**SECTION: 501-03**

Update Prior to Sale: Luggage Compartment Lid Interior Trim Loose

**AFFECTED VEHICLE RANGE:**

**F-TYPE (X152)**

**Model Year:** 2014

**Body style:** Convertible

**VIN:** K09456-K10851

**MARKETS:**

NAS

**CONDITION SUMMARY:**

**Situation:** A potential issue has been identified on a limited number of 2014 model year F-TYPE (X152; convertible only) vehicles where the luggage compartment lid interior trim may be loose and/or detached from the luggage compartment lid.

**Action:** Retailers are required to **HOLD** only affected vehicles that are within your control and refrain from releasing the vehicles for new or used vehicle sale pending completion of the rework action detailed in this Technical Bulletin. Unsold vehicles should have this performed as part of the Pre-Delivery Inspection (PDI) process but **must** have it completed prior to vehicle handover to the customer.

**PARTS:**



**NOTE: \* when ordering parts, order only the expected percentage demand of parts identified**

DESCRIPTION	PART No. / SUNDRY CODE	QTY. / VALUE	EXPECTED % of VEHICLES REQUIRING PARTS*
Liner - Luggage compartment lid - with retaining clips	T2R2008	1	50

**SPECIAL TOOLS:**

Refer to Workshop Manual / Service Instruction for any required tools

**WARRANTY:**



**NOTE: Check DDW to ensure that a vehicle is affected by this program prior to undertaking any rework action. Repair procedures are under constant review, and therefore times / prices are subject to change; those quoted here must be taken as guidance only. Refer to TOPix to obtain the latest repair**

**time. At the time of confirming a booking for vehicle repair, ensure that all outstanding Service Actions are identified to ensure the correct parts are available and adequate workshop time is allocated for repairs to be completed at one visit.**

Warranty claims must be submitted quoting Program Code '**K248**' together with the relevant Option Code from the table. The SRO and part information listed have been included for information only. The Option Code(s) that allows for the drive in / drive out allowance may only be claimed if the vehicle is brought into the workshop for this action alone to be undertaken.

This program is valid for a limited time only. Warranty claims with a repair date prior to the **02 April 2015** closure date must be submitted for payment within 30 calendar days of completion of the repair.

PROGRAM CODE	OPTION CODE	DESCRIPTION	SRO	TIME (HOURS)	PARTS / SUNDRY CODE	QTY. / VALUE
K248	B	Perform 3 luggage compartment lid 'slam shut' operations	10.10.99	0.2	-	-
K248	C	Perform 3 luggage compartment lid 'slam shut' operations Drive in/drive out	10.10.99 10.10.10	0.2 0.1	- -	- -
K248	D	Perform 3 luggage compartment lid 'slam shut' operations Replace luggage compartment lid trim	10.10.99 76.19.66	0.2 0.2	- T2R2008	- 1
K248	E	Perform 3 luggage compartment lid 'slam shut' operations Replace luggage compartment lid trim Drive in/drive out	10.10.99 76.19.66 10.10.10	0.2 0.2 0.1	- T2R2008 -	- 1 -

Normal Warranty policies and procedures apply


### **SERVICE INSTRUCTION:**

1. Open and 'slam shut' the luggage compartment lid three (3) times.




2. Open the luggage compartment lid and make sure the luggage compartment lid trim is securely in place.

- If the luggage compartment lid trim is securely held in place, continue to step 5.
- If the luggage compartment lid trim is not securely held in place, continue to step 3.

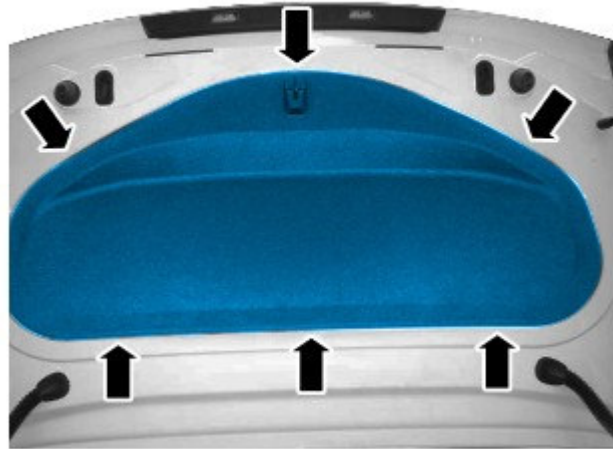

E169942


3. If the luggage compartment lid trim is loose / hanging / detached from **any** of the retaining clips, continue to step 4.

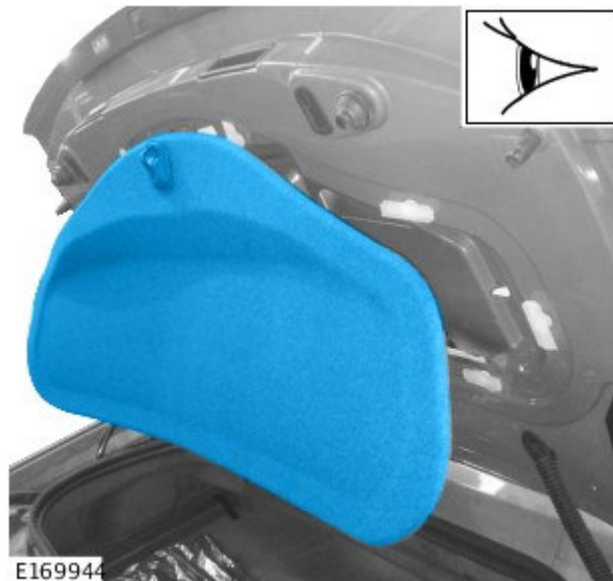

E169944

4.  **NOTE: The new luggage compartment lid trim is fitted with the nine (9) clips.**

Replace the luggage compartment lid liner.

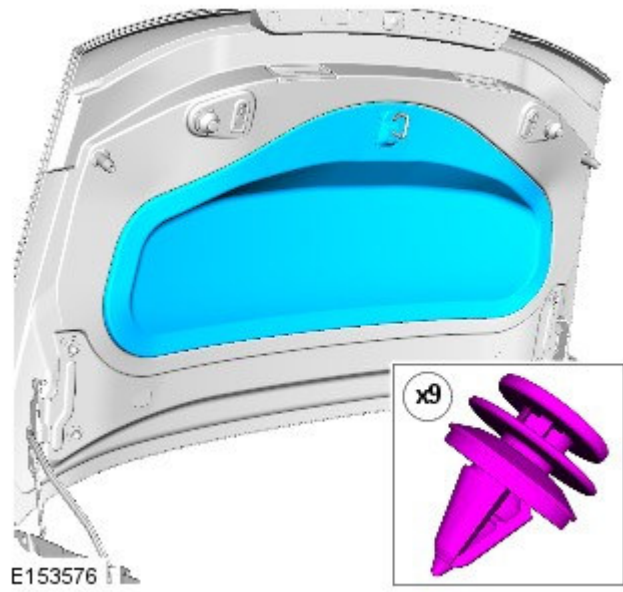

5. Close the luggage compartment lid.