

WINDOWS

Purpose

This document outlines the procedure for adding additional sealant to LCI 8800 Series Exit Windows installed on a sloped surface.

Safety

Read and understand all instructions before installing or operating this product. Adhere to all safety labels.

CAUTION


Always wear eye protection when performing service, maintenance or installation procedures. Other safety equipment to consider would be hearing protection, gloves and possibly a full face shield, depending on the nature of the task.

CAUTION

Moving parts can pinch, crush or cut. Keep clear and use caution.

Resources Required

- 100 percent silicone sealant

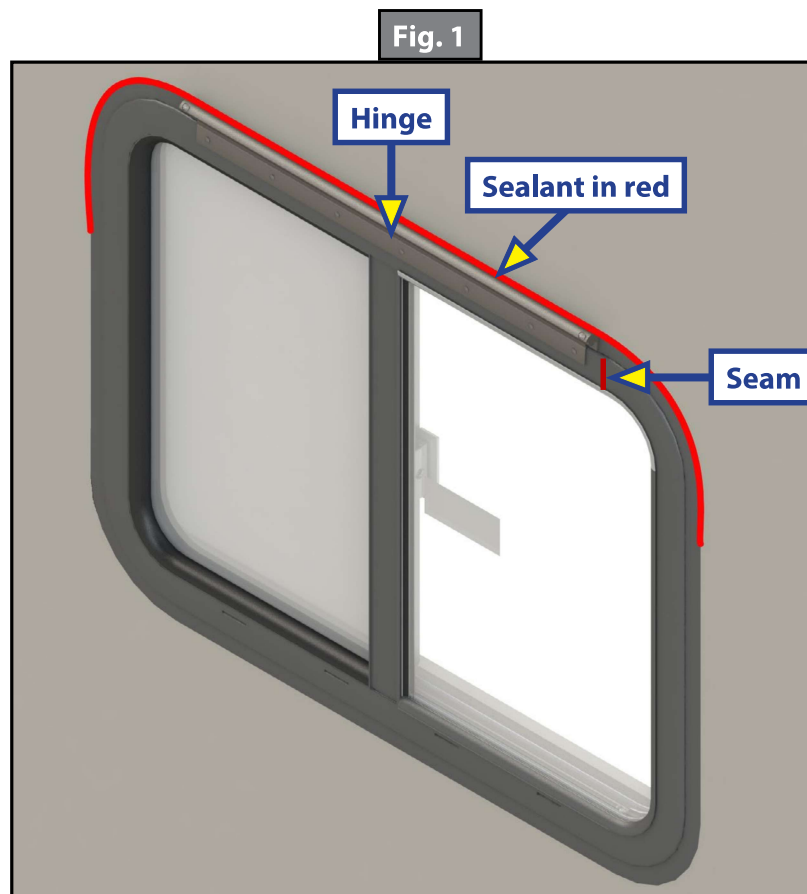



8800 SERIES WINDOW TOP SEAM SEAL FIX

TI-367

WINDOWS

Procedure

1. Apply silicone sealant on the exterior side of the window, on top of the hinge on the outer frame (Fig.1).
2. Apply silicone sealant around the radius of the window extending 3-4" past the radius (Fig.1).
3. Apply silicone sealant at frame seam of the window frame (Fig. 1).

As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at (574) 537-8900 or by email at customerservice@lci1.com. Self-help tips, technical documents, product videos and a training class schedule are available at lci1.com or by downloading the MyLCI app.