



MAINTENANCE INFORMATION

MI20-08A

DATE: April 2020 SECTION: 00 GENERAL
SUBJECT:
STORAGE AND STARTUP GUIDELINES

	21516229 replaced by 23381562	
	20523393 replaced by 21454749	
Revision: A	800383 removed	06-10-2020
Revision. A	611471 replaced by 611360	00-10-2020
	70376808 replaced by 21036050	
	21396642 replaced by 20967831	

APPLICATION

Model	VIN	PREVOST CAR INC.
ALL P	REVOST VEH	HICLES & VOLVO 9700

DESCRIPTION

Periodically, circumstances arise requiring operators to temporarily park a coach in storage. Whether it is a few weeks or several months, sporadic out of service times or a full stop, Prevost recommends following the guidelines in this document during times when:

- The coach can be operated on a regular/weekly basis while in storage.
- The coach will be in storage for an extended period without any operation.
- The coach will return to service following an extended period of downtime.

The following recommendations are general in nature for all coaches but should be modified to meet each customer requirements as needed.

TABLE OF CONTENT

SUGGESTED MATERIAL	2
PROCEDURE	4
PROPER STORAGE FOR OPTIMAL START UP	
WHEN A COACH CAN BE OPERATED WEEKLY	5
START UP RECOMMENDATIONS	5
PARTS / WASTE DISPOSAL	14

SUGGESTED MATERIAL

The material listed below may be required to complete the storage and return to service operations described in this document.

Applicable to 2018 model year and newer vehicles

Description	Prevost H3	Prevost X3	Volvo 9700
Emergency Road kit	3200922	3200922	3176488
DEF 2 gallons container	685328	685328	685328
DEF refractometer	88890105	88890105	88890105
DEF pump filter	23381562	23381562	23381562
AGM batteries	21258363	21258363	21258363
Fan drive oil 75W90	680719	680719	ATF Dexron II D
			ATF Dexron III
Belt	5060134 BX71	5060134 BX71	20995830 V-RIBBED
	506080	506080	8PK
	5060104	5060104	22424888 BELT
	506026	506026	21248896 V-RIBBED
	506083 (Remy)	506083 (Remy)	
	506084 (Remy)	506084 (Remy)	
Belt tensioner	450044 a/c	450044 a/c	21719386
	510991 alternator	510991 alternator	22105565
	510991 water pump	510991 water pump	21479276

Pulley A/C compressor oil	20582550 water pump small 22719941 water pump top 450094 a/c comp O12349 alternator 680801	20582550 water pump small 22719941 water pump top 450094 a/c comp O12349 alternator 680801	20524754 water pump 22424879 a/c comp 21454749 alternator
A/C compressor oil Bitzer A/C compressor Seal	950509	950509	950509
Air dryer desiccant	642123	642123	21620181 filter kit
Wiper blades assy	800284	800284	21338424
Suspension air spring	Front axle 630285 Drive axle 630260 Tag axle 630286	Front axle 630285 Drive axle 630260 Tag axle 630286	Front axle 70397048 Rear axle 21251607 Rear axle 70377052 Tag axle 22445751
Wheel oil seal	621916	621916	20531577
Wheel gasket	621640	621640	1076656
Unitized hubs	Front I-beam axle Up to H-6188 #611360 From H-6189 #611360 Front axle independent Up to H-6203 #611360 From H-6204 #611360 Tag axle w/ ABS tone ring #621816p Tag axle w/o ABS tone ring #621807	Front I-beam axle Up to H-6188 #611360 From H-6189 #611360 Front axle independent Up to H-6203 #611360 From H-6204 #611360 Tag axle w/ ABS tone ring #621816p Tag axle w/o ABS tone ring #621807	Drive axle #21036050 Front & Tag axle #20967831
Diesel fuel stabilizer	Use quality stabilizer	Use quality stabilizer	Use quality stabilizer

NOTE

Material can be obtained through regular channels.

PROCEDURE



DANGER

Park vehicle safely, apply parking brake, stop the engine. Prior to working on the vehicle, set the ignition switch to the OFF position and trip the main circuit breakers equipped with a trip button. On Commuter type vehicles, set the battery master switch (master cut-out) to the OFF position.

Lock out & Tag out (LOTO) must be performed during set-up, maintenance or repair activities. Refer to your local procedure for detailed information regarding the control of hazardous energy.

PROPER STORAGE FOR OPTIMAL STARTUP

When a coach is going to be parked or put into storage for an extended period, the following steps are recommended.

1.	Change fluids depending on age and condition, check coolant strength with tester. Replace if sediment present.
2.	Drain all air tanks and accessory filter.
3. and	Make sure that the roof escape hatches and emergency exit windows are closed latched.
4.	Thoroughly clean the coach. Apply wax if possible.
5.	Install moisture control canisters if needed in humid environments.
6.	Plug areas where rodents can get in with steel wool, fiberglass insulation or dryer softener sheets.
7.	Inflate all tires to correct air pressure.
8.	Add diesel fuel stabilizer in the fuel tank.
9.	After parking the unit, before disconnecting all batteries, make sure they are fully charged.
10. 🔲	Drain the DEF tank if storing longer than six months.
11. 🔲	Close all drivers and passengers sunshades.
12. 🔲	Drain the lavatory waste and clean the tanks. Leave dump valve open for ventilation.
13. \square	Make sure that all external doors are closed and latched correctly.

WHEN A COACH CAN BE OPERATED WEEKLY

1.	Ш	Keep on-board battery charger plugged in or if not possible, trip circuit breakers equipped with a trip button when vehicle is parked.
2.		Check the fluid levels.
3.		Start the coach for 30 minutes to circulate fluids and charge up the batteries.
4.		Turn on the passenger HVAC system, run for 15 minutes in heat mode and then 15 minutes in air conditioning mode. Verify starting temperature and end temperature.
5.		Move the unit to circulate transmission fluid, rotate tires, lubricate the wheel seals and check the brakes.
6.		Road test to operating temperature and highway speed if circumstances allow.
7.		When parking, try to avoid flat spots on the tire. Make sure the tires will be in a different position.

START UP RECOMMENDATIONS



CAUTION


Ensure all proper PPE (Personal Protective Equipment) is worn prior to working on the vehicle.

IMPORTANT NOTE

After a coach has been parked for an extended period, an inspection of the unit is required to make sure all items are intact and in good working order.

If operating a vehicle with biodiesel fuel, sample tank before starting.

Use the following guide to do a walk around inspection prior to start up.

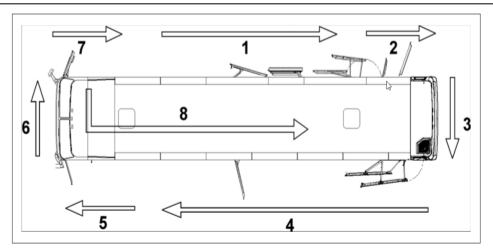

Section #1 - Right Side of Coach				
Item	Inspection P	erformed	Initials	
1	Visually insp	pect all baggage compartment doors and side windows for issues and		
Tech	Comments			
Item	Inspection P	erformed	Initials	
2	Open all ba are dry insid	ggage compartment doors to ensure proper operation and that they le		
Tech	Comments			
Item	Inspection I	Performed	Initials	
3	Open fuel f	iller access door and condenser compartment door to verify condition		
Tech	Tech Comments			
Item	Inspection I	Performed	Initials	
4	Inspect A/C	components in this area for signs of leakage		
Tech Comments				
Item	Inspection I	Performed	Initials	
5	Check to m	ake sure the emergency road kit is in place		
Tech	Tech Comments			

	Section #2 - Battery and Right Side Engine Compartment	
Item	Inspection Performed	Initials
6	Open the battery compartment and inspect for issues and condition	
Tech (Comments	
Item	Inspection Performed	Initials
7	Clean all cable lugs and wire terminals as needed	
Tech (Comments	
Item	Inspection Performed	Initials
8	Connect new or charged up batteries	
Tech (Comments	
Item	Inspection Performed	Initials
9	Check voltage at the equalizer to validate correct connections	
Tech (Comments	

Item	Inspection	Inspection Performed		
10	Visually check the right rear wheels and tires			
Tech (Tech Comments			

		Section #3 - Engine Compartment	
Item	Inspection Performed		
11	Check rea	r taillights, directional signals, clearance and identification lights for eration	
Tech (Tech Comments		
Item	Inspection	Performed	Initials
12	Open the r	ear engine door, make sure door gas springs are okay and the safety	
Tech (Comments		
Item	Inspection	Performed	Initials
13	Look unde	r the coach and check for oil and coolant leaks	
Tech (Comments		
Item	Inspection	Performed	Initials
14		engine oil, coolant, transmission and power steering fluid levels	
Tech (Comments		
Item	Inspection	Performed	Initials
15	Check the	fan drive gear box oil level if applicable	
Tech (Comments		
Item	Inspection	Performed	Initials
16	Inspect all	belts for cracks and pulleys for wear	
Tech (Comments		
Item	Inspection	Performed	Initials
17	Remove al	Il belts, physically spin all pulleys and idlers, check for squeaks and igh spots	
Tech (Tech Comments		
Item	Inspection	Performed	Initials
18	Check the applicable	A/C compressor condition. Check oil level. Empty drain tube if	
Tech (Comments		

Item	Inspection	Performed	Initials
19	Check the	alternators and cables for signs of issues	
Tech (Comments		
	ı		
Item	Inspection	Performed	Initials
20	Check the	air intake piping for signs of issues	
Tech (Comments		
14			1 141 1
Item	Inspection	Performed	Initials
21	Check the fan blade condition		
Tech (Tech Comments		

		Section #4 - Left Side of Coach	
Item	Inspection	Performed	Initials
22	Visually check wheels and tires		
Tech (Tech Comments		l
Item	Inspection	Performed	Initials
23	Open the	radiator door and inspect for issues	
Tech (Comments		
Item	Inspection	Performed	Initials
24	Open DPF	S/SCR door if applicable and check for issues	
Tech (Tech Comments		
Item	Inspection	Performed	Initials
Item 25	•	aggage compartment doors to verify proper operation and that they	Initials
25	Open all b	aggage compartment doors to verify proper operation and that they	Initials
25	Open all b	aggage compartment doors to verify proper operation and that they ide	Initials Initials
25	Open all bare dry ins Comments Inspection Open the 6	aggage compartment doors to verify proper operation and that they ide	
25 Tech (Open all bare dry ins Comments Inspection Open the 6	aggage compartment doors to verify proper operation and that they ide Performed evaporator door. Inspect for coolant leaks and make sure the ducting	
25 Tech (Open all bare dry ins Comments Inspection Open the easier is in good	aggage compartment doors to verify proper operation and that they ide Performed evaporator door. Inspect for coolant leaks and make sure the ducting condition and in place	
25 Tech (Open all bare dry ins Comments Inspection Open the dis in good Comments Inspection	aggage compartment doors to verify proper operation and that they ide Performed evaporator door. Inspect for coolant leaks and make sure the ducting condition and in place	Initials

	Section #5 - Front Service and Electrical Compartment	
Item	Inspection Performed	Initials
28	Visually check left front wheel and tire	
Tech (omments	
Item	Inspection Performed	Initials
29	Visually inspect the front junction box condition	
Tech (omments	
Item	Inspection Performed	Initials
30	Visually inspect the front service compartment for issues. Check pull handle for bumper release	
Tech (Tech Comments	
Item	Inspection Performed	Initials
31	Check windshield washer fluid level	
Tech	omments	

Section #6 - Front of Coach			
Item	Inspection	performed	Initials
32	Check from	nt headlights, directional signals, identification and clearance lights operation	
Tech	comments		
Item	Inspection	performed	Initials
33	Open the f	front bumper and check the spare tire inflation and security	
Tech	Tech comments		
Item	Inspection	performed	Initials
34	Inspect for	coolant leaks	
Tech	comments		
Item	Inspection	performed	Initials
35	Check for	light and body damage	
Tech	Tech comments		
Item	Inspection	performed	Initials
36	Check wip	er arms and wiper blades	
Tech	Tech comments		•

	Section #7 - Entrance Door a	and Right Front of the coach
Item	Inspection performed	Initials
37	Visually check right front wheel and tire	
Tech o	comments	
Item	Inspection performed	Initials
38	Visually check the entrance door condition	on
Tech o	comments	
Item	Inspection performed	Initials
39	Check operation of entrance door switch	es
Tech comments		
Item	Inspection performed	Initials
40	Check operation of the emergency door	release valve
Tech	comments	

		Section #8 - Interior of Coach	
Item	n Inspection performed		
41			
Tech	Tech comments		
Item	Inspection	performed	Initials
42	Visually in:	spect interior condition for water entry	
Tech	Tech comments		
Item	Inspection	performed	Initials
43	Check for	signs of rodent activity and droppings	
Tech comments			
Item	Inspection	performed	Initials
44	Check ope	eration of every emergency exit windows and roof hatches	
Tech comments			
Item	Inspection	performed	Initials
45	Turn on igi	nition and verify fuel level, DEF level and warning lights	
Tech	Tech comments		

Item	Inspection	performed	Initials
46		fault codes in the DID (Driver Information Display). Refer to the Manual for details.	
Tech comments		mandar for detaile.	
Item	Inspection	performed	Initials
47	Perform ex	kterior light test in DID under vehicle tests	
	comments		
Item	Inspection	performed	Initials
48	Perform br	rake leakage test in DID under vehicle tests	
Tech o	comments		
Item	Inspection	performed	Initials
49		ectric motors test in DID under vehicle tests	
Tech o	comments		
Item	Inspection	performed	Initials
50	Start and r	run the engine at idle speed	
Tech	comments		
Item	Inspection	performed	Initials
51	Monitor oil	pressure and air pressure build up as well as alarms	
Tech	comments		
Item	Inspection	performed	Initials
52	Check for	fluid and air leaks with engine running	
Tech o	comments		
Item	Inspection	performed	Initials
53	Check and	l adjust exterior mirrors	
Tech	comments		
Item	Inspection	performed	Initials
54	Check enti	rance door operation	
	comments		
Item	Inspection	performed	Initials
55	Check win	dshield wipers and washers condition and operation	
	comments	,	
Item	Inspection	performed	Initials
56	Check inte	rior lighting	
	comments		1

Item	Inspection performed		
57	Shift transmission into reverse and check back up alarm		
Tech o	Tech comments		
Item	Inspection	performed	Initials
58	Release bi	rakes and move the vehicle to shop	
Tech comments			

	Section #9 - Undercarriage of coach				
Item	Inspection performed				
59	Inspect condition of all suspension and steering components				
Tech	Tech comments				
Item	Inspection	performed	Initials		
60	Lubricate a	all steering linkages			
Tech	comments				
Item	Inspection	performed	Initials		
61	Inspect all	brakes and wheel seals			
Tech	comments				
Item	Inspection	performed	Initials		
62	Service air	system and replace air dryer if required			
Tech	Tech comments				
Item	Inspection	performed	Initials		
63	Check air	springs condition and shocks for leaks			
Tech	Tech comments				
Item	Inspection	performed	Initials		
64	Perform a	closer tire inspection			
Tech	Tech comments				

Additional Items once the unit has been moved into the shop				
Item	Inspection	performed	Initials	
65	Check DE	F with refractometer, replace if test result isn't good		
Tech	comments			
Item	Inspection	performed	Initials	
66	Pressure to	est cooling system		
Tech o	comments			
Item	Inspection	performed	Initials	
67	Inspect an	d charge A/C system if needed. Check for proper operation and		
Tech o	comments			
Item	Inspection	performed	Initials	
68	Clean or re	eplace the passenger and driver HVAC air filters		
Tech o	comments			
Item	Inspection	performed	Initials	
69		Fire Suppression System. Make sure the control panel light is green the extinguisher bottle if applicable		
Tech	comments			
Item	Inspection	performed	Initials	
70	Check whe	eelchair lift operation and sliding seat movement if applicable		
Tech o	comments			
Item	Inspection	performed	Initials	
71		eheating system if applicable		
Tech	comments			
Item	Inspection	performed	Initials	
72		to check coach operation. Perform a final check for leaks		
Tech comments				

PARTS / WASTE DISPOSAL

Discard according to applicable environmental regulations (Municipal/State[Prov.]/ Federal)

Access all our Service Bulletins on http://techpub.prevostcar.com/en/
Or scan the QR-Code with your smart phone

Are you a vehicle owner?

E-mail us at <u>technicalpublications prev@volvo.com</u> and type "ADD" in the subject to receive warranty bulletins applicable to your vehicle(s) by e-mail.

