

Service Journal

TITLE:

Safety Instructions for Rescue Work – PS2

REF NO: SJ 1000321P	ISSUING DEPARTMENT: Service Operations			REFERENCE BULLETINS:	
CATEGORY:	SUBCATEGORY:			CAR MARKET: United States and Canada	
Service Personnel: Read and initial	SERVICE MANAGER	SERVICE WRITER	WARRANTY ADMINISTRATOR	ISSUE DATE: 2020-07-17	STATUS DATE: 2020-07-17
				Page 1 of 3	

“Right first time in Time”

Affected Vehicles

Model Year	Model	Engine
2021	Polestar 2	E400V6

Safety Information

This document contains information about and location of the different types of stored energy (for example, pyrotechnical, fuel, and electric voltage). All emergency services personnel should be familiar with this document to avoid accidental activation or ignition during rescue actions. The information is not exact, it shall be regarded as general. The information shown applies to left-hand drive vehicles. On right-hand drive vehicles, certain parts may have reversed positions.



Warning! For emergency services personnel: Disconnect the battery and wait at least 30 seconds before starting work on the vehicle. This is to prevent inadvertent activation of pyrotechnical SRS components.

Note! Applies to vehicles with electric drivetrain: If the car has been subjected to a collision, the text “Safety Mode See Owner’s Manual” can be displayed in the driver’s display. The high-voltage system has then automatically switched off. Only disconnect the 12-volt battery. If the text “Safety Mode See Owner’s Manual” is NOT displayed in the driver’s display, the high-voltage system may still be switched on. Then disconnect the high-voltage system, and then the 12-volt battery.

Service Journal 1000321P

Note! Do not touch high-voltage components.

Note! Hardness in the members may vary between different models. In illustrations where several models appear with the same body structure, the variant with the hardest material is always shown.

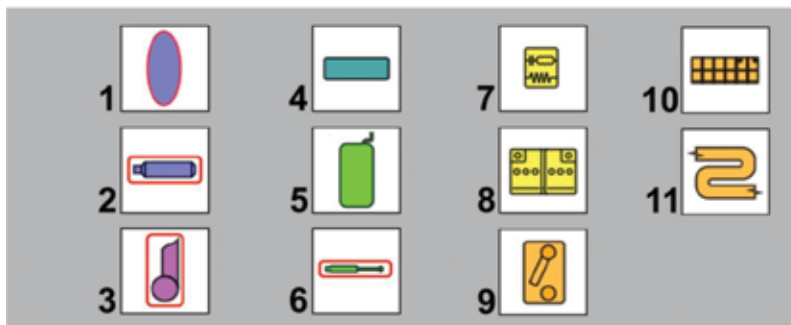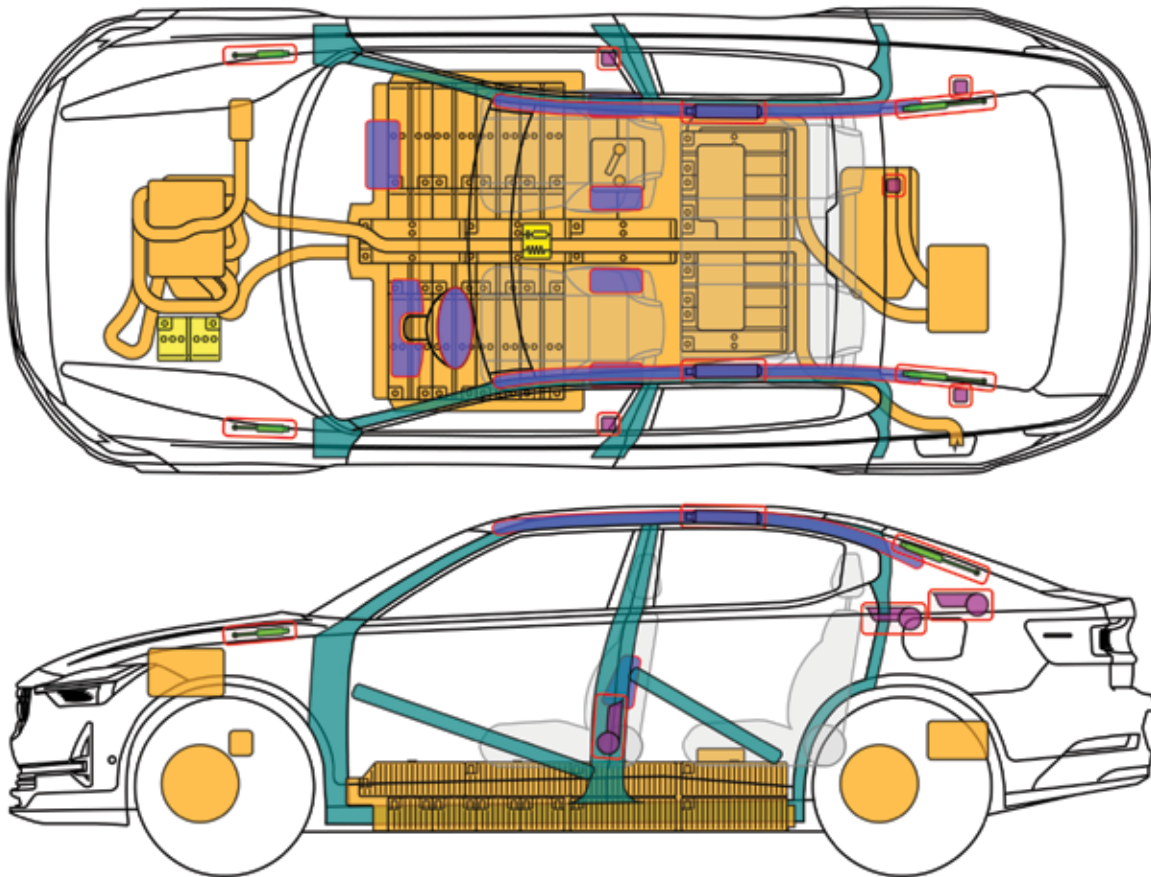

- 1 . Airbag
- 2 . Gas generator
- 3 . Seat belt pretensioner
- 4 . Reinforcements
- 5 . Fuel tank
- 6 . Gas strut
- 7 . Supplemental Restraint System Module (SRS)
- 8 . Battery
- 9 . High voltage battery disconnecting
- 10 High voltage battery
- 11 High voltage cable /component

- >180 <280
- >280 <380
- >380 <800
- >800
- Aluminum

