



**S-Series™**  
BACKED BY McNEILUS

# Technical Service Information Bulletin

## 2.0 Mixer System Wireless Remote Pairing

**Date:** November 18, 2021

**Bulletin Name:** FDM-TSIB-033

**Model:** Oshkosh S-Series

**Units Affected:** 2.0 Front Discharge Mixers

### Purpose:

This bulletin provides instructions for pairing mixer system wireless remote to wireless system receiver.

### Notice:

- This bulletin should be read and understood in its entirety before performing this procedure.
- All procedures outlined in the bulletin must be performed by skilled service personnel. Refer to the product service manual for descriptions of maintenance procedures.

### Procedure:

Perform following procedure from vehicle's driver seat.

1. Locate wireless system receiver under left-hand side of dash, see Figure 1.

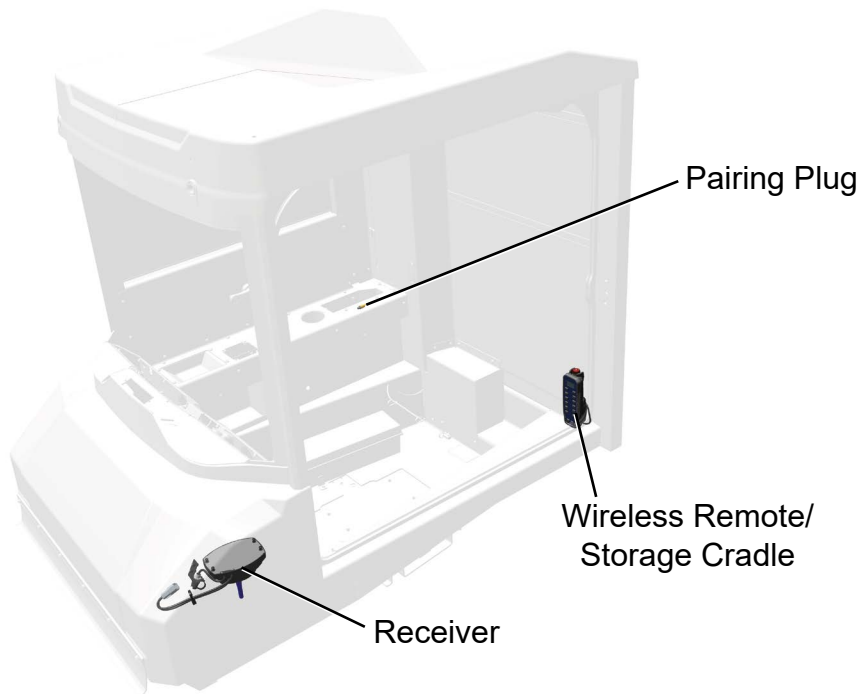


Figure 1

## NOTE

Pairing plug may be installed in receiver pairing connector or it may be located in side storage compartment.

2. Install pairing plug in receiver pairing connector, see Figure 2.

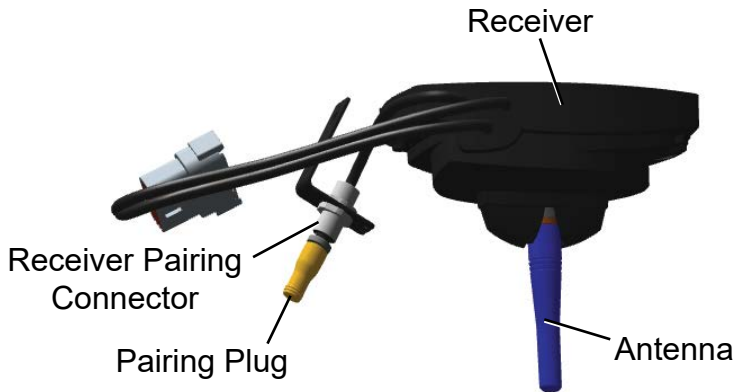


Figure 2

3. Remove wireless remote from storage cradle, see Figure 1.
4. Turn vehicle ignition ON and make sure Mixer Switch Panel Wireless Remote ON/OFF switch is turned ON (green LED illuminated), see Figure 3.



Figure 3

5. Turn vehicle ignition OFF.
6. Rotate wireless remote stop button counterclockwise to make sure stop button is up and not activated, see Figure 4.
7. Press and hold buttons 1 and 3 together until remote wakes up and beeps once, then release buttons. See Figure 4.
8. Turn vehicle ignition ON.
9. Press remote ON button once to turn remote on, see Figure 4.
10. When Oshkosh logo disappears from LCD display press and hold ON button, wireless remote will beep 3 times indicating remote is in pairing mode and connected to system receiver.
11. Release ON button when pairing begins. Pairing is complete when there are four lines of text on wireless remote LED display.
12. Press OFF button when pairing is complete to turn wireless remote OFF, see Figure 4.



Figure 4

**⚠ WARNING**

**Make sure vehicle and area around vehicle are clear of personnel before starting vehicle. Failure to comply could result in serious personal injury or death.**

13. Turn vehicle ignition ON and start vehicle.
14. Press and release wireless remote ON button to turn remote ON.
15. Verify wireless remote operation of mixer functions, see Operator Manual section 1.4.1.8.
16. Press OFF button to turn wireless remote OFF, see Figure 4.
17. Turn vehicle ignition OFF.
18. Install wireless remote in storage cradle, see Figure 1.

**Continuous Improvement:**

The change included in this document is part of the McNeilus Continuous Improvement Process.

*McNeilus's quality policy is providing customer satisfaction through innovative products, dedicated service, and a constant focus on continuous improvement.*



(888) 686-7278

[www.streetsmartparts.com](http://www.streetsmartparts.com)