



Back Office - Mack Chassis - Radio Mute In Reverse - GEN II Models



> Internal Content

To turn on radio mute:

1. Set parameter **SNQ** (Audio System Mute in Reverse Gear, Enable) to **1**
2. Set variant to **AUDOFF**
3. Manually update the NTP to **23755037**
4. Update the Instrument Cluster Module (Mid 140)

Additional Information [here](#)



Tags

[k03331013](#)

[mid 140](#)

[mack](#)

Related links and attachments



Live UI

[Enable procedures v1](#)



Feedback

[Give feedback](#)

to help improve the content of this article


DEA7XX Radio Change LDWS Settings

Procedures to change LDWS setting to ENABLE


- Truck Battery Power and at least Accessory Key ignition on
- Radio in Power OFF condition (no sources selected)
 - If any Source is ON, press and hold SRC button until Source turns off
- Press and hold 6, then Press and hold 6 and 1
- Hold 6 and 1 for about 10 seconds until menu comes up
- With knob, navigate to LDWS option
- Press Knob
- With Knob, select ENABLE
- Press Knob
- Press DISP

- DONE

If any Audio Source is on, then hold down the SRC button until

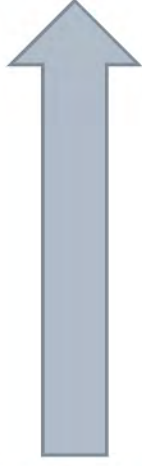


Press and hold button 6, then press and hold button 1 and press and hold button 6 for 5 seconds

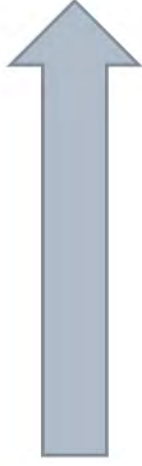


Hidden Settings Menu




Once the Hidden Settings Menu comes up, rotate the Knob and highlight LDWS

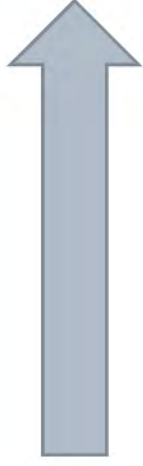


Press the Knob to select LDWS selection menu

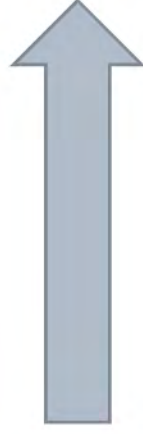

Rotate Knob to highlight ENABLE

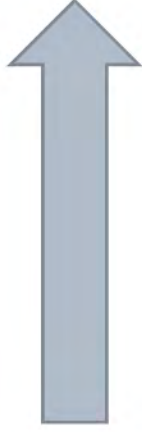

Press Knob to select ENABLE

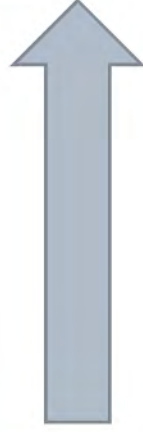

Press DISP or let menu timer time-out to the main screen

