

## DOORS

## Purpose

This document outlines how to square a baggage door so that it has equal space on both sides, in between the baggage door and the baggage door frame.

## Tools Required

- Cordless or electric drill or screwdriver
- Appropriate size drill bit

## Safety

Before starting any work read these instructions.

**⚠ CAUTION**

The "CAUTION" symbol above is a sign that a safety risk is involved and may cause personal injury and/or product or property damage if not safely adhered to and within the parameters set forth in this document

**⚠ CAUTION**

Moving parts can pinch, crush, or cut. Keep clear at all times.

## Procedure

1. Lift up the baggage door (Fig. 1A).

**NOTE:** Keep all removed screws for re-installation.

2. Remove the screws (Fig. 2A) along the bottom of the baggage door frame and set aside to re-install later.

Fig. 1


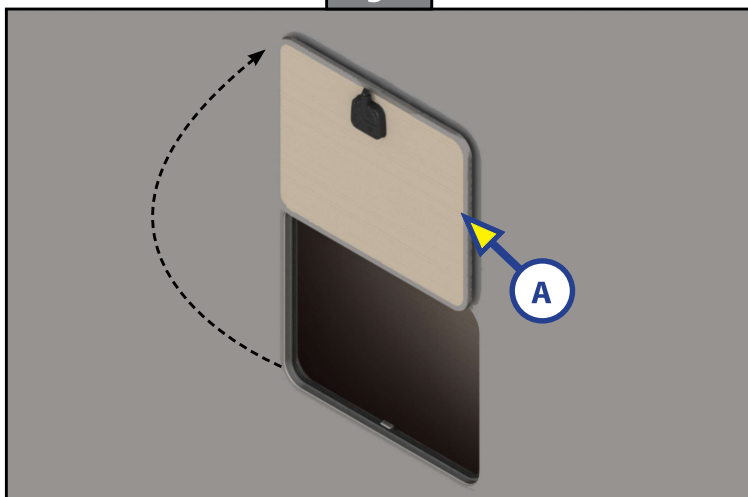


Fig. 2

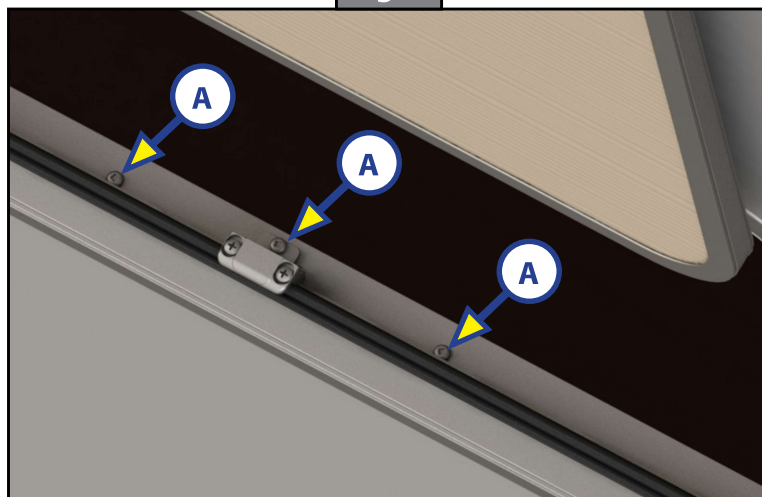

## DOORS

3. Loosen all the screws (Fig. 3A) on both sides of the frame of the baggage door.
4. Shift the outer frame to the left (Fig. 4A) or right (Fig. 4B) to have an equal distance along both sides (Fig. 5A,B) in between the baggage door (Fig. 5C) and the frame (Fig. 5D) by tightening the screws on the side that needs to be moved away from the baggage door.
5. Shut the door to make sure it is properly aligned. Lift the baggage door and repeat step 4 if necessary. Once aligned, lift the door and reinstall the bottom screws.

Fig. 3

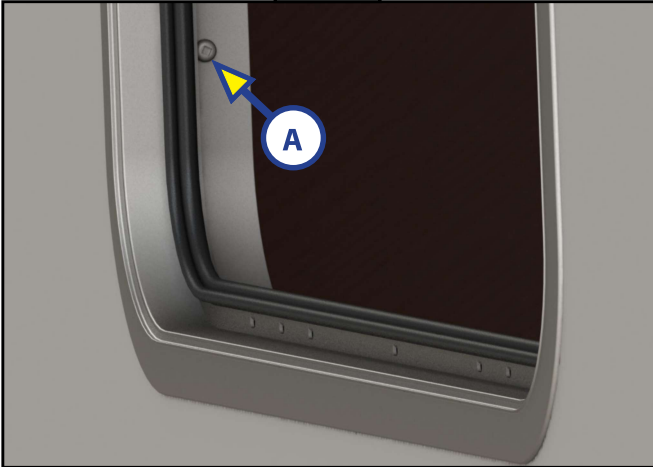


Fig. 4



Fig. 5



As a supplier of components to the RV industry, safety, education and customer satisfaction are our primary concerns. Should you have any questions, please do not hesitate to contact us at 432-LIPPERT (432-547-7378) or by email at [customerservice@lci1.com](mailto:customerservice@lci1.com). Self-help tips, technical documents, product videos and a training class schedule are available at [lippert.com](http://lippert.com) or by downloading the LippertNOW app.