

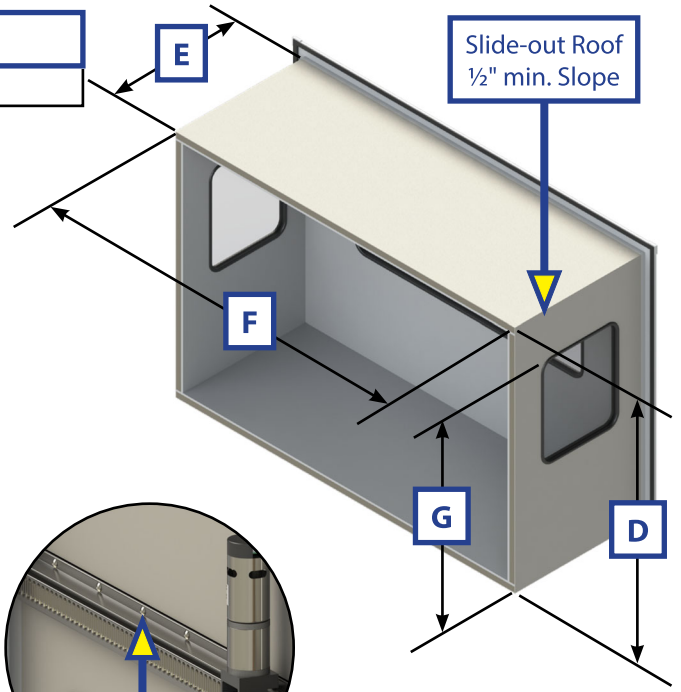


**SLIDE-OUTS**

OEM \_\_\_\_\_ Plant# \_\_\_\_\_

**In-Wall® Slide-out**

Make [coach manufacturer] \_\_\_\_\_ Model Name - Floorplan# \_\_\_\_\_

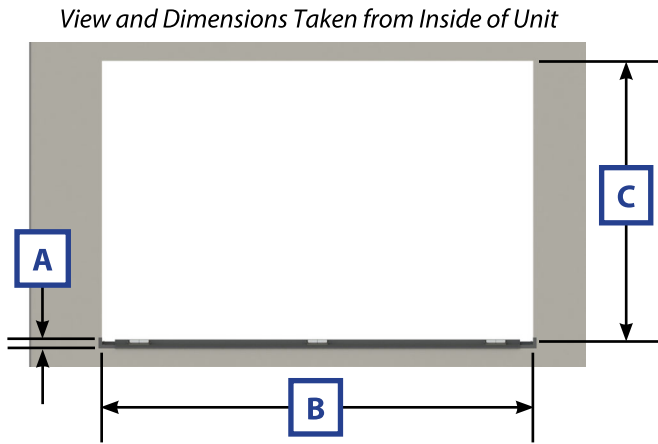

**Backer Required\***  
for Top and Bottom  
Rack mounting screws

\*Backer location will be determined after print is created. Hole-span equals bottom of box to bottom of top rack.

Please fill out the information below.

A = Minimum roller height is 1.00". Select optional height:  
1.250"  1.500"

B = Length of slide opening in sidewall \_\_\_\_\_  
needs to be 5.25" larger than measurement (F).

C = Height of slide opening in sidewall \_\_\_\_\_  
slide opening is equal to 1.25" plus roller height (A).

D = Height of slide box \_\_\_\_\_  
(measure from tallest point on top of roof to bottom of slide floor)

E = Depth of slide box \_\_\_\_\_

F = Length of slide box \_\_\_\_\_

Hole center \_\_\_\_\_  
(measure center of Gib to center of Gib)

G = Window Height \_\_\_\_\_

**Type of System**

[Standard]

[Standard Inverted]

[Stack Rack]

[Stack Rack Inverted]


[VII - motorized]

[VII Inverted - motorized]

**Wiper Types**

Outside seal  [KE]  [EK]  [Flat]

Inside seal  [KE]  [EK]  [Flat]



**Column Color**

White  Black

**Motor Option**


300:1  500:1

**Rack Color**

Silver  Black

**SLIDE-OUTS**

If your box is 6 ft or less in length, and does not exceed 500 lbs, rollers are not required.

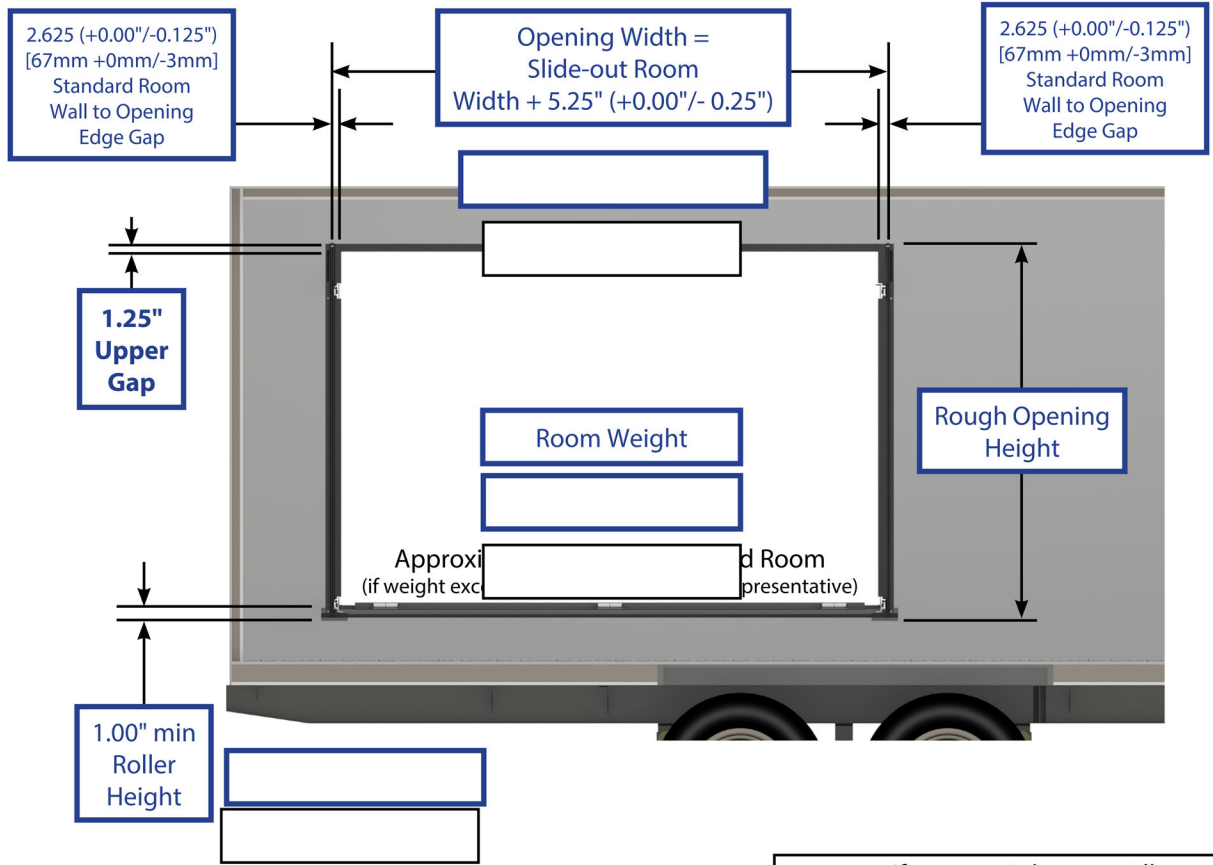

Interior of Slide Room Consists of:

Specified Notes

(Slide opening **MUST** be 5.25" larger than length of room.)

Approved By (customer) \_\_\_\_\_

Date \_\_\_\_\_

