



SERVICE BULLETIN

| | | |
|------------------------------------|--------------------------------|-------------------------------|
| Classification: HA16-001 | Reference: NTB16-072 | Date: July 27, 2016 |
|------------------------------------|--------------------------------|-------------------------------|

2014-2016 TAXI; WASHABLE FILTER FOR HVAC SYSTEM

APPLIED VEHICLES: 2014-2016 Taxi

SERVICE INFORMATION

A washable filter for the HVAC system is now available.

| PART NAME | PART NUMBER |
|--|--------------------|
| WASHABLE FILTER | 27277-9SH0A |
| Standard (non-washable) charcoal type filter | 27277-3LN0A |

- The Washable Filter is factory-equipped on 2016 Taxi.
- For 2014-2015 Taxi, the Washable Filter can be purchased and installed in place of the Standard Filter.
- The Standard Filter is available, and can be used for 2014-2016 Taxi.

Refer to page 2 for the Washable Filter Cleaning Procedure.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

Washable Filter Cleaning Procedure

NOTE: Recommended cleaning interval is every 2 months or 15,000 miles (whichever is shorter).

1. Remove the cover from the HVAC filter.
2. Remove filter (remove carefully, do not damage the filter).

3. Carefully shake the filter to remove most of the dust.

- Shake gently with both hands.
- Rough handling (shaking with a lot of force) could damage the filter.

4. Hold the filter face down (see Figure 1). With fingers, carefully open the filter plates allowing dust to fall out.

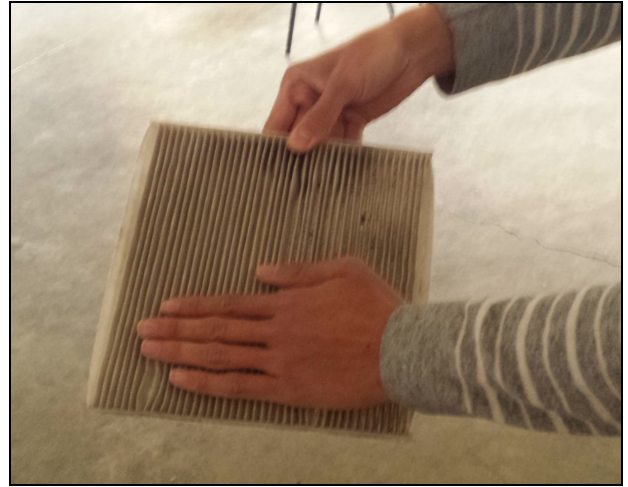


Figure 1

5. Using water in a bucket, wash the filter.

- Carefully use your fingers to open the filter plates allowing the water to wash out the dust.
- Rough handling (washing with a lot of force) could damage the filter.



Figure 2

6. Dry the filter with a hair dryer, until it is completely dry.

- **DO NOT** use shop air pressure to dry the filter. High air pressure will damage the filter.

7. Reinstall the filter in reverse order.