



# SERVICE BULLETIN

Classification: AT16-020c	Reference: NTB17-039c	Date: October 11, 2017
------------------------------	--------------------------	---------------------------

## PATHFINDER, ALTIMA, MAXIMA, MURANO; CVT JUDDER AND DTC P17F0 OR P17F1 STORED

**This bulletin has changed.  
You must read the entire bulletin to properly perform this repair.  
Please discard previous versions of this bulletin.**

**APPLIED VEHICLE:** 2013-2017 Pathfinder (R52)  
2013-2017 Altima (L33) **with V6 only**  
2016-2017 Maxima (A36)  
2015-2017 Murano (Z52)

**APPLIED TRANSMISSTION:** CVT

### IF YOU CONFIRM

The customer reports a transmission judder (shake, shudder, single or multiple bumps or vibration)

### AND

One of these DTCs is stored.

- **P17F0** (CVT\_JUDDER (T/M INSPECTION))
- **P17F1** (CVT\_JUDDER (C/U INSPECTION))

### NOTE:

- If a transmission judder (as described above) is not reported, this bulletin does not apply.
- If either **P17F0** or **P17F1** are not stored, this bulletin does not apply.
- If any DTCs are stored other than **P17F0** or **P17F1**, this bulletin does not apply.
- NTB15-014, **Enhanced Diagnostic Logic For CVT Judder**, has reprogramming instructions that may apply.

### ACTION


- Refer to the **Repair Flow Chart** on page 2 for CVT repair.

**CAUTION:** Always handle the CVT and component assemblies carefully and with the appropriate lifting tools.

**IMPORTANT:** The purpose of **ACTION** (above) is to give you a quick idea of the work you will be performing. You **MUST** closely follow the entire **SERVICE PROCEDURE** as it contains information that is essential to successfully completing this repair.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

## Repair Flow Chart

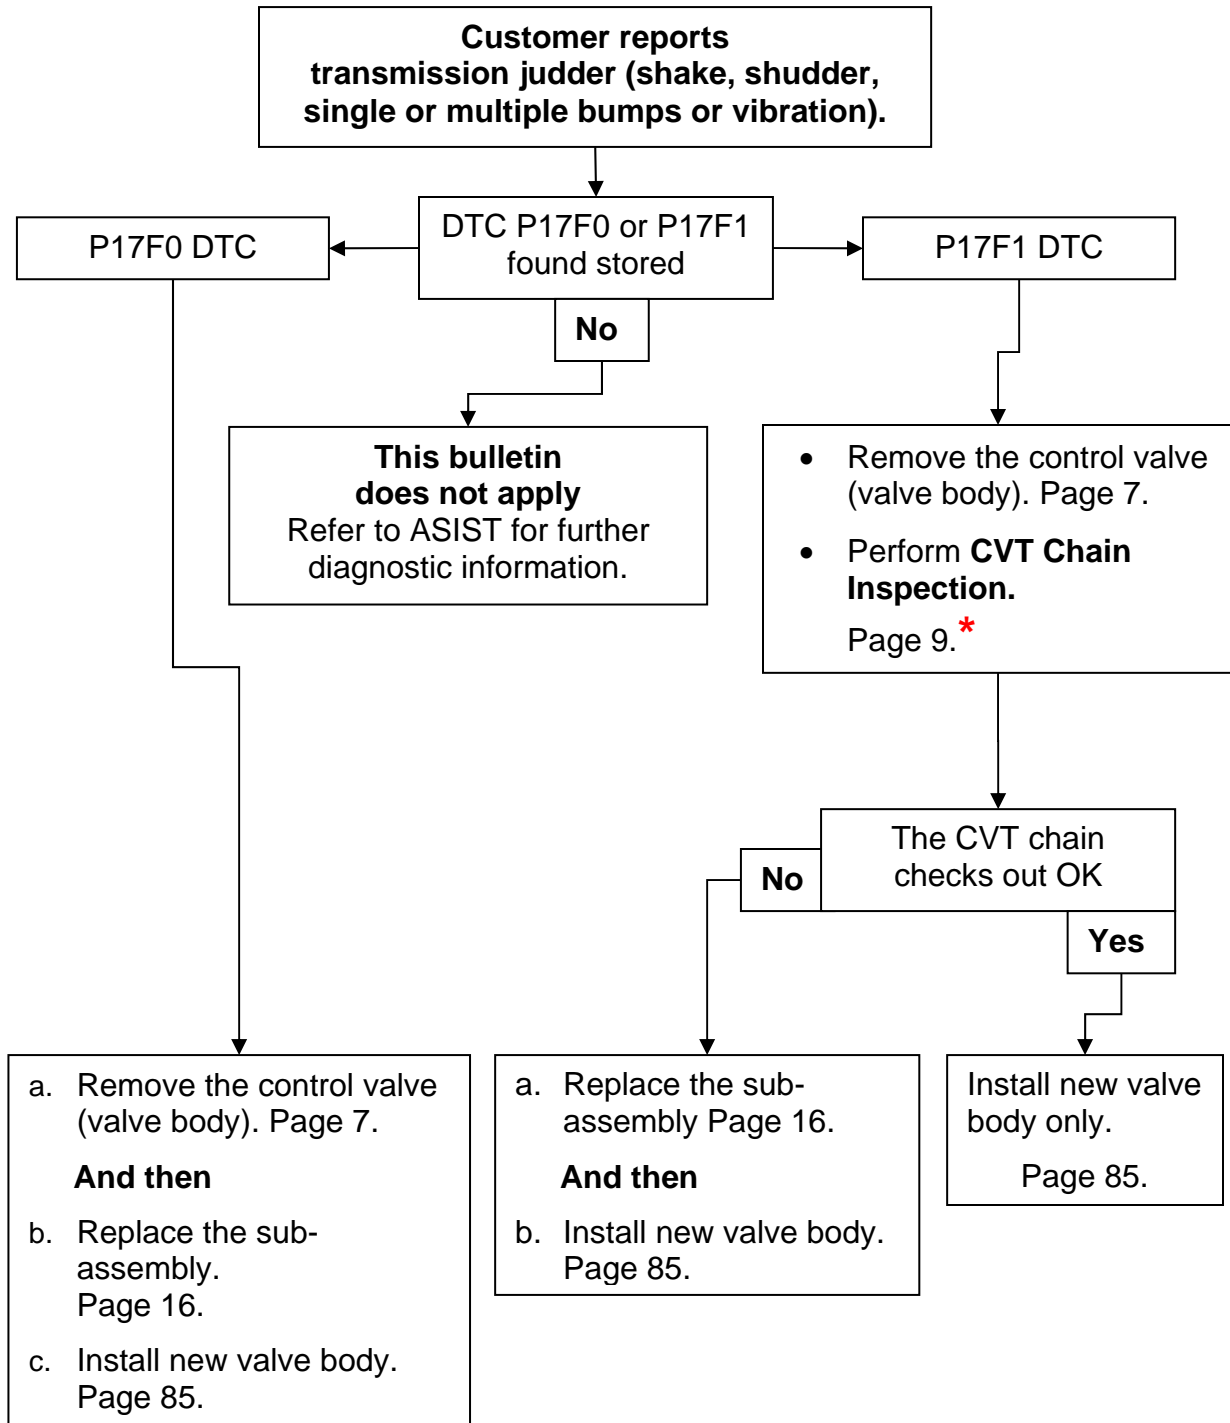

**\* DO NOT perform the CONSULT-III plus CVT INSPECTION test. This is no longer accepted for warranty repairs.**

## Table of Contents

• Required Tools / Material.....	page 4
• Essential Tools.....	page 4
• Weights.....	page 5
• Precautions when Disassembling a CVT Assembly.....	page 6
• Control Valve (Valve Body) Removal .....	page 7
• CVT Chain Inspection.....	page 9
• CVT Assembly Removal.....	page 16
• Remove the Converter Housing, Oil Seals, Oil Pump Cover, Oil Pump and Oil Filter.....	page 19
• Verify Thrust Bearing Type 1 or Type 2.....	page 25
• Clean the CVT case surfaces.....	page 28
• Clean the Oil Passages in the CVT Case, Oil Pump Cover, and CVT Filter Area.....	page 29
• New Oil Pump Installation.....	page 31
• Replace the Side Cover – Pulleys and Chain (sub-assembly).....	page 33
• Remove Side Cover and Install Lubrication Caps.....	page 48
• Type 1 CVT: Clutch Total Endplay Adjustment – Thrust Bearing Selection...	page 62
• Type 2 CVT: Clutch Total Endplay Adjustment – Bearing Race Selection.....	page 67
• Clean the Torque Converter Housing, Dummy Cover Passages and Baffle Plates .....	page 75
• CVT Reassembly.....	page 77
• Control Valve (Valve Body) Strainer and Pan Installation.....	page 85
• Install the CVT Assembly.....	page 91
• Trouble Shooting.....	page 98
• PARTS INFORMATION.....	page 100
• Parts Kits Reference Table.....	page 102
• CLAIMS INFORMATION.....	page 103
• Type 1 and Type 2 Additional Reference Images.....	page 105

## Required Tools / Materials

- Cherry picker / engine hoist / lifting arm (never handle replacement CVT sub-assembly by hand)
- Strap or chain to lift / lower CVT and sub-assembly
- Petroleum jelly or equivalent
- Extendable magnet
- Large clean surface / 1 to 2 work tables
- Vernier calipers
- Brake cleaner
- Rubbing alcohol
- Plastic scraper

## Essential Tools

Additional Essential Tools are available from Tech•Mate online: [www.nissantechmate.com](http://www.nissantechmate.com), or by phone: 1-800-662-2001.

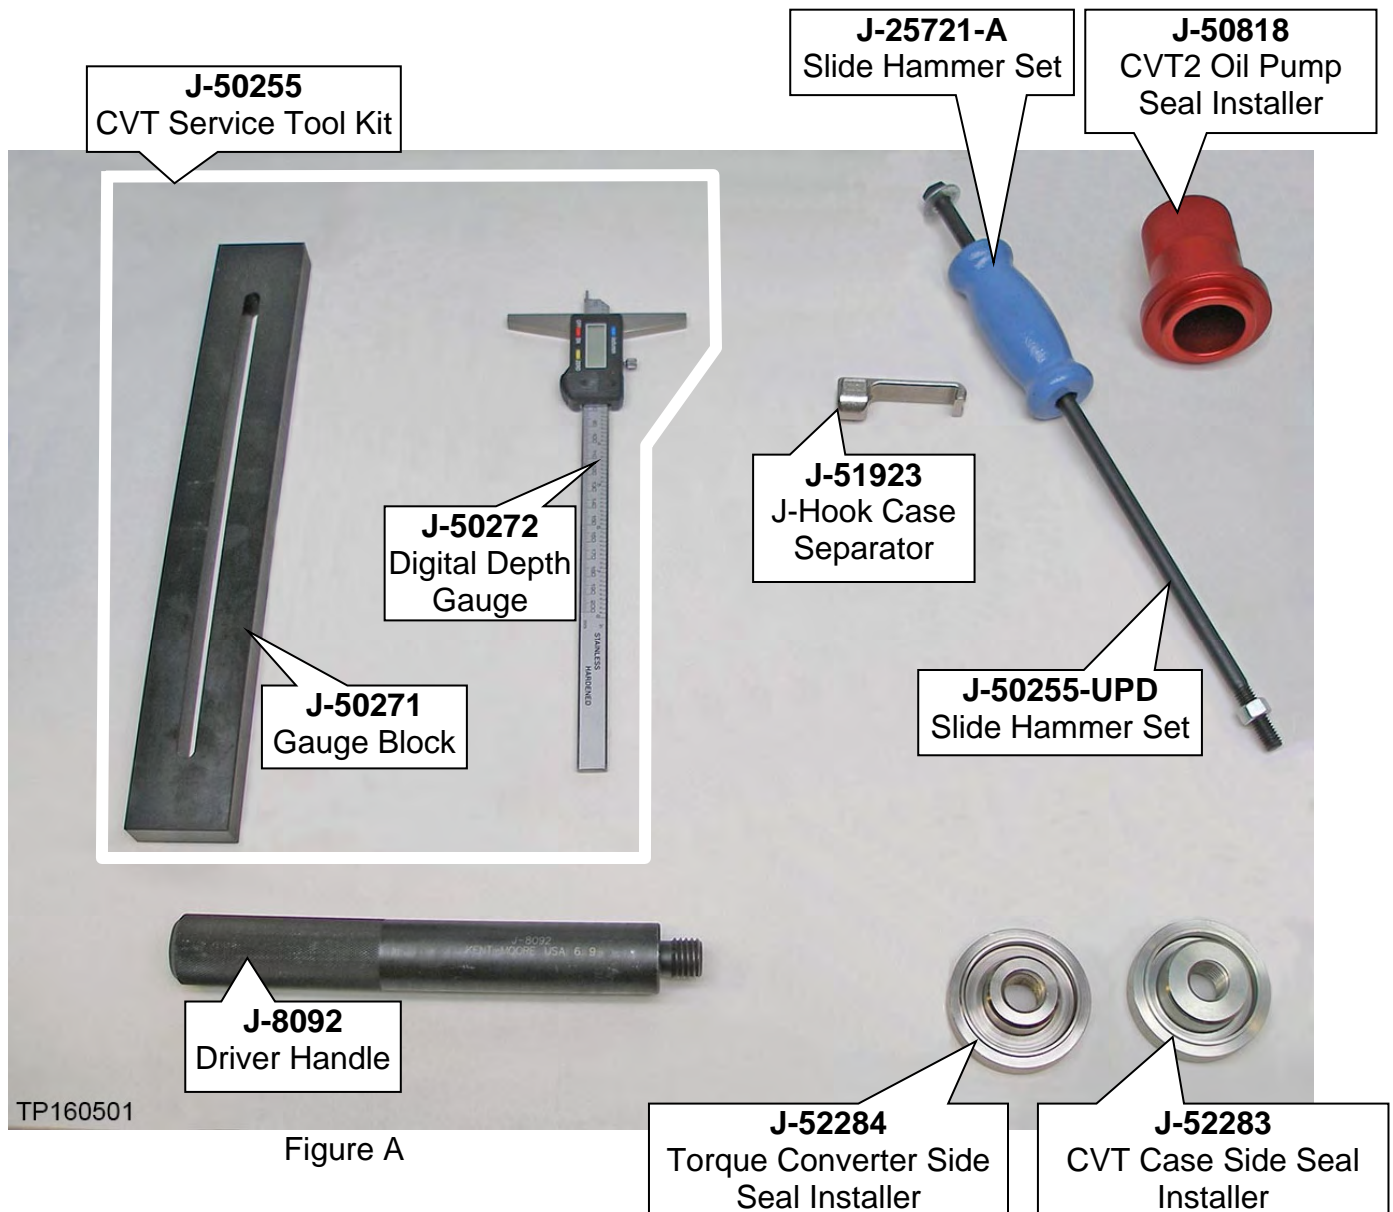


Figure A

**Essential Tools (continued)**

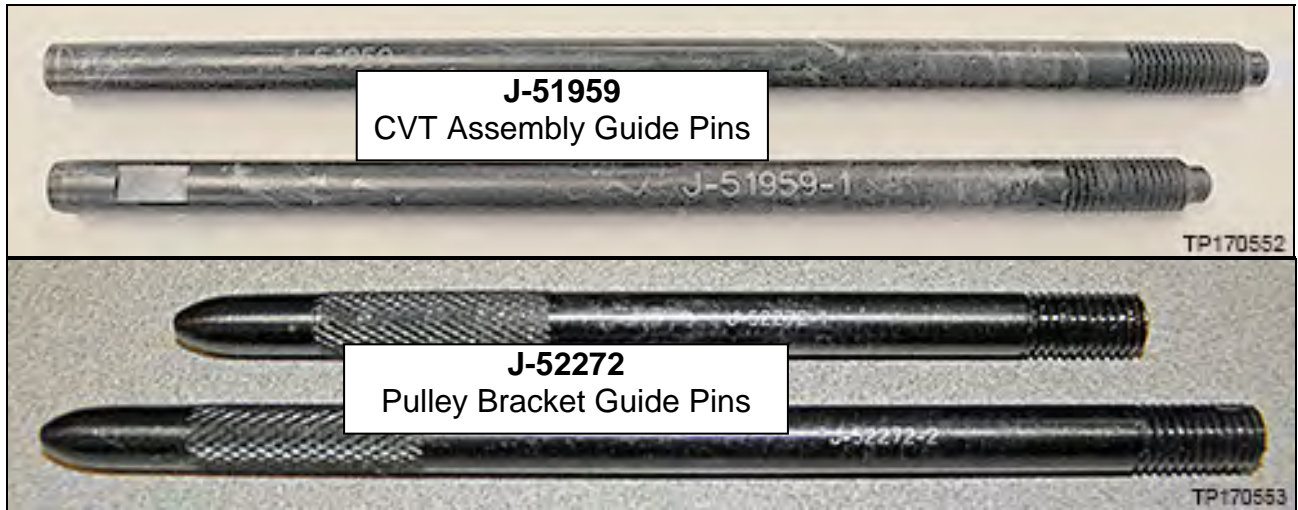


Figure B

**CVT Universal Lifting Fixture**

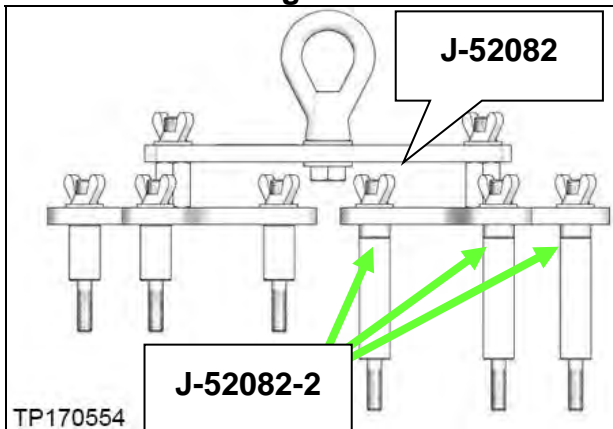


Figure C

**CVT Side Cover Alignment Aid**

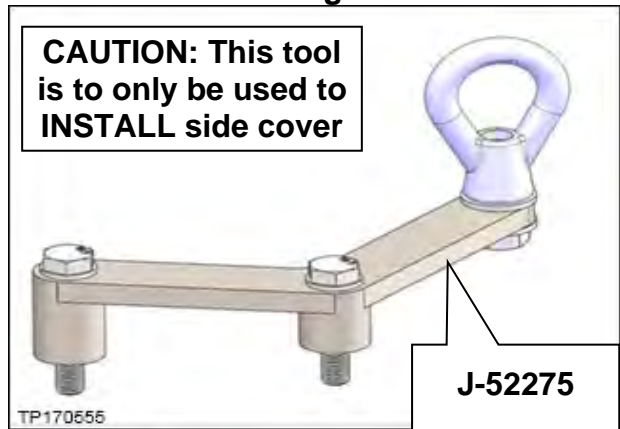


Figure D

**Tech Cam J-51951**

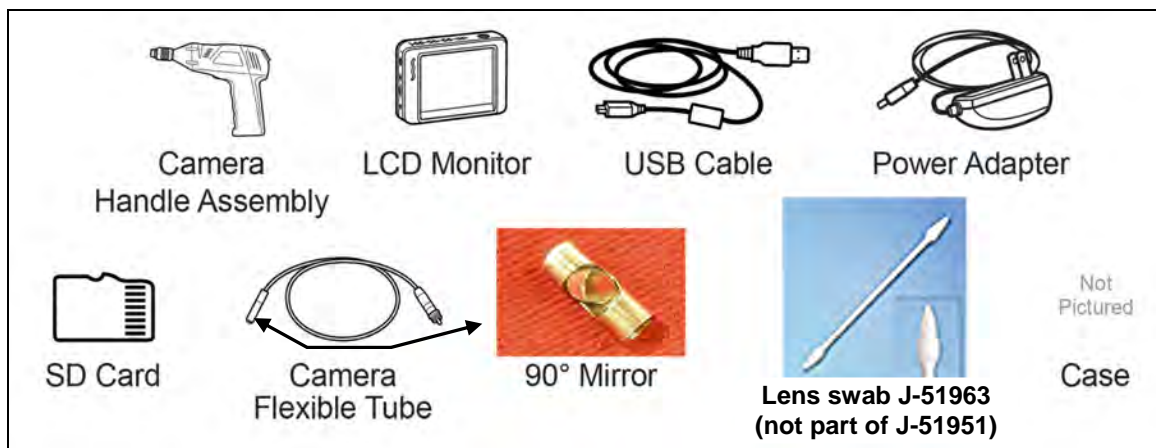


Figure E

- Additional Tech Cam J-51951 kits or components are available from Tech•Mate.

**Weights**

- CVT assembly: 300 lbs. approximately
- CVT sub-assembly: 65 lbs. approximately

## GENERAL INFORMATION

### Precautions when Disassembling a CVT Assembly

Transmissions are vulnerable to particles (dust, metal, lint, etc.).

When disassembling a CVT, make sure your work environment (shop, workbench, etc.), transmission area (sub-frame, oil pan, harness connector, etc.), and your hands are free of contamination.

### IMPORTANT:

- Wash and clean the exterior of the CVT assembly prior to disassembling.  
**CAUTION:** Cover all air breather and drive shaft holes to prevent water intrusion.
- Refrigerating oil seals may help in assembly (axle and T/C seals).
- Only disassemble those parts which are mentioned in this bulletin.
- Make sure all parts are clean prior to assembling / installing.
- Apply rust penetrant to locator / dowel pins on torque converter housing and side cover of CVT and allow to soak as needed (Figure 1).

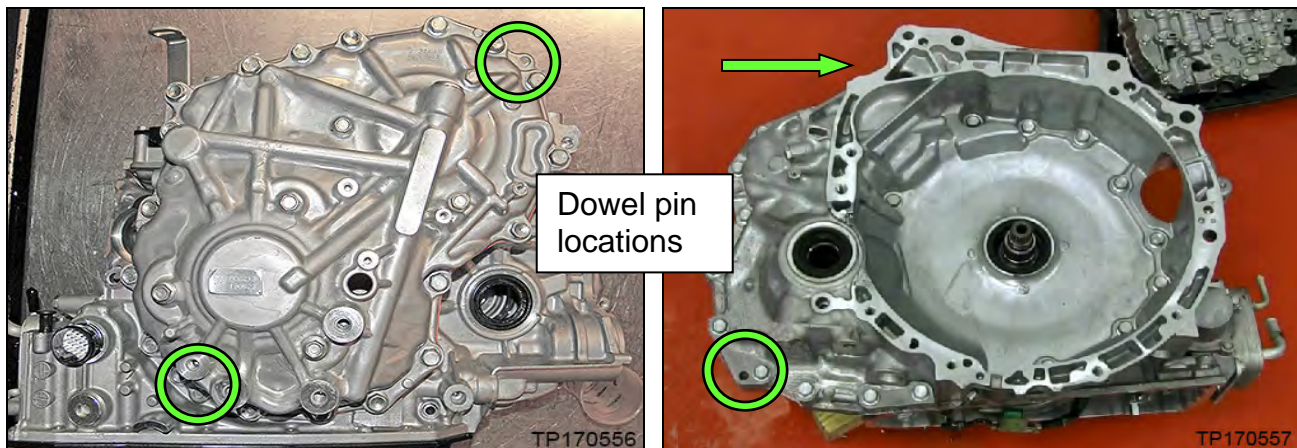


Figure 1

- Unpack service parts just before installation.
- To aid with organization, store related parts that have been removed separately.

**IMPORTANT:** The CVT unit “wiring harness connector” will be reused during this procedure. The wiring harness can be disconnected from the valve body at the wiring harness connector and remain in the CVT.

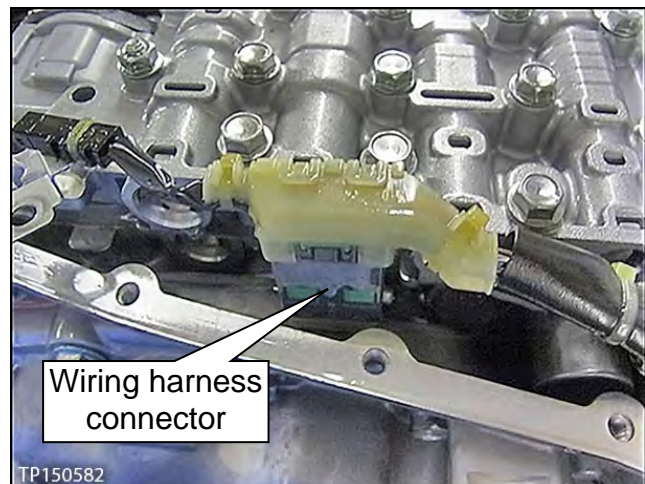


Figure 2

## SERVICE PROCEDURE

### Control Valve (Valve Body) Removal

1. Write down all radio station presets.

Presets	1	2	3	4	5	6
AM						
FM 1						
FM 2						
SAT 1						
SAT 2/3						
Bass	Treble	Balance	Fade	Speed Sen. Vol.		

2. Disconnect both battery cables, negative cable first.
3. Is DTC **P17F0** stored?

- **YES:**

- a. Remove the CVT from the vehicle, place it on a workbench and then remove the valve body.

- Refer to the Electronic Service Manual (ESM), section **TM-Transaxle & Transmission** for removal information.

**NOTE:** The number “7” is on the head of all bolts that need to be removed for valve body removal. Do not remove any bolt that does not have the number “7”.

**CAUTION:** For **AWD Vehicles** use extreme care when moving the axle in and out of the transfer assembly to avoid seal damage.

- b. Position the CVT on the workbench with the oil pan side down.

**CAUTION:** Do not hit the manual shaft while flipping the CVT; the manual shaft protrudes past the CVT case. Use a plastic / wooden block to support as needed.

- c. Proceed to step 4 on page 18.

- **NO:** Proceed to step 4.

4. Remove the valve body.

- Before lifting the vehicle place the transmission gear selector in Neutral.
- Refer to the appropriate ESM, section **TM – Transaxle & Transmission**, for valve body removal.

**NOTE:** The number “7” is on the head of all bolts that need to be removed for valve body removal. Do not remove any bolt that does not have the number “7”.

**CAUTION:** **Never allow any chemicals or fluids other than NS-3 CVT fluid or equivalent to enter the CVT assembly. Never allow any foreign debris, dust, dirt, etc. to enter the CVT assembly.**

- For additional information, see video # 546: “CVT Chain Inspection”. This video is located under the TECH TRAINING GARAGE VIDEOS tab in Virtual Academy.

# Exploded View

Example: Exploded View of Control Valve (valve body)

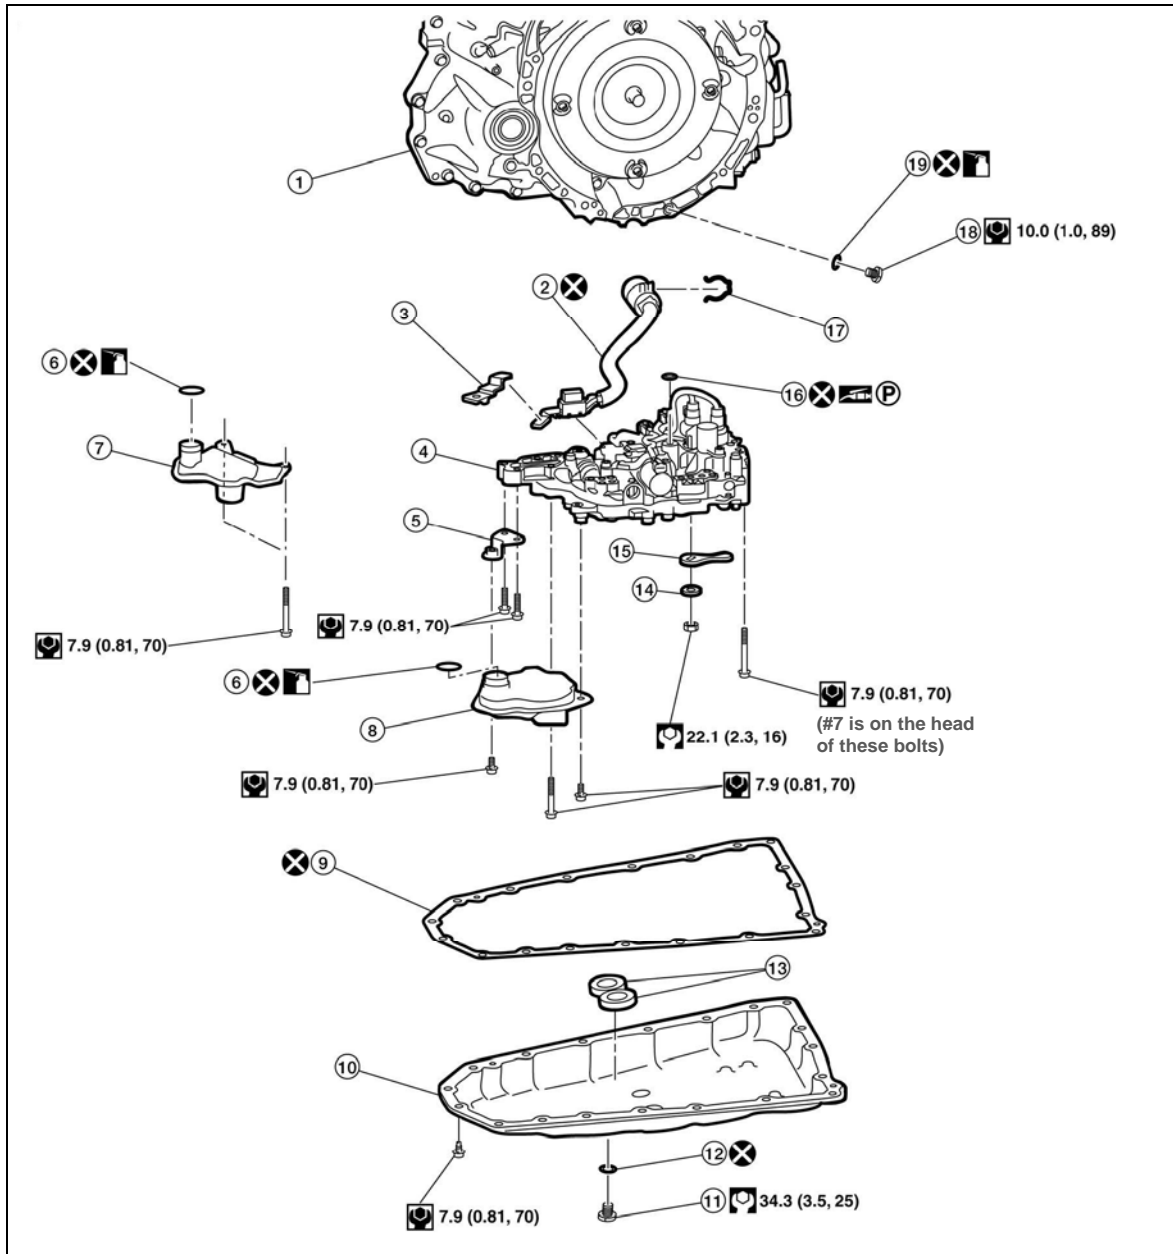




Figure 3

- |                                    |                                    |   |
|------------------------------------|------------------------------------|---|
| 1. Transaxle assembly              | 2. Terminal cord assembly          | 3. CVT fluid temperature sensor bracket |
| 4. Control valve                   | 5. Bracket                         | 6. O-ring                               |
| 7. New-style oil strainer assembly | 8. Old-style oil strainer assembly | 9. Oil pan gasket                       |
| 10. Oil pan                        | 11. Drain plug                     | 12. Drain plug gasket                   |
| 13. Magnet                         | 14. Spring washer                  | 15. Manual plate                        |
| 16. Lip seal                       | 17. Snap ring                      | 18. Overflow plug                       |
| 19. O-ring : CVT fluid             |                                    |   |

- ⊗ : Always replace after every disassembly.
-  : N·m (kg-m, ft-lb)
-  : N·m (kg-m, in-lb)



## CVT Chain Inspection

1. Secure the right front tire with a suitable strap.
2. Mark the left front tire with a suitable marking.
  - This will assure all 360° of the chain is inspected.
3. Using borescope J-51951 with mirror attachment, visually inspect the entirety of the two sides of the chain that come in contact with the pulleys:

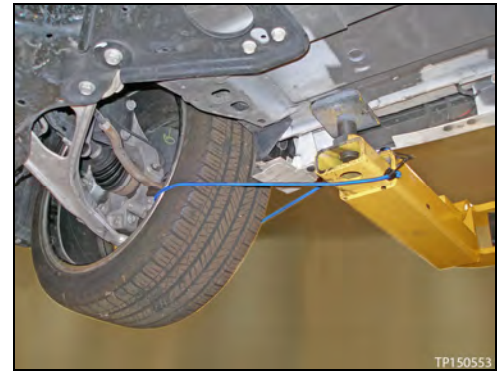


Figure 4

- a. First inspect the entirety (360°) of the driver side of the chain that comes in contact with the pulley (see page 11, Figure 8 and 9, and page 12, Figure 11).
- b. If the inspection result is OK on all 360°, inspect all 360° of the passenger side of the chain.

### IMPORTANT:

- Reference the pictures on page 13-15 for chain image comparison.
- Be sure to remove the protective film from the mirror before the first use.
- Clean the camera lens and mirror before each inspection. Use 90% isopropyl alcohol, and a lens swab from the Lens Swab packet J-51963 listed in **PARTS INFORMATION**.
- Before inspecting, make sure the camera handle's AA batteries are fresh and the LCD monitor's battery is charged.
- Insert the camera lens behind the pulley between the guide rail and the pulley where shown in Figure 5 (also see page 10-11, Figure 6-9).
- Insert the lens approximately 8-9 inches, and then view the side of the chain that contacts the pulley.
- Refer to Garage Video #546 if needed for Borescope inspection.

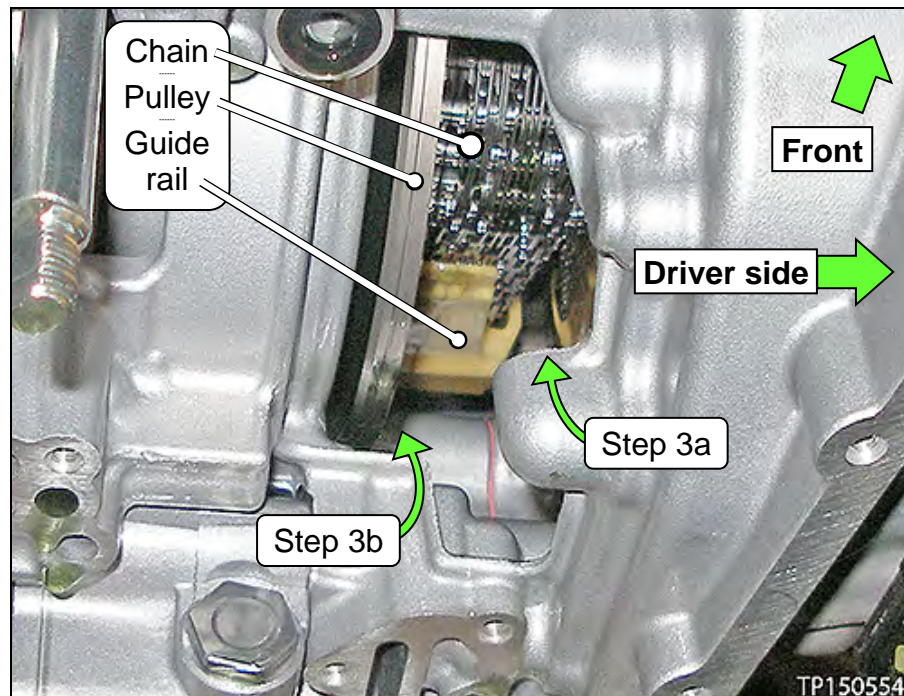


Figure 5

- Figure 6 shows where to insert the camera lens on the driver side of the chain.

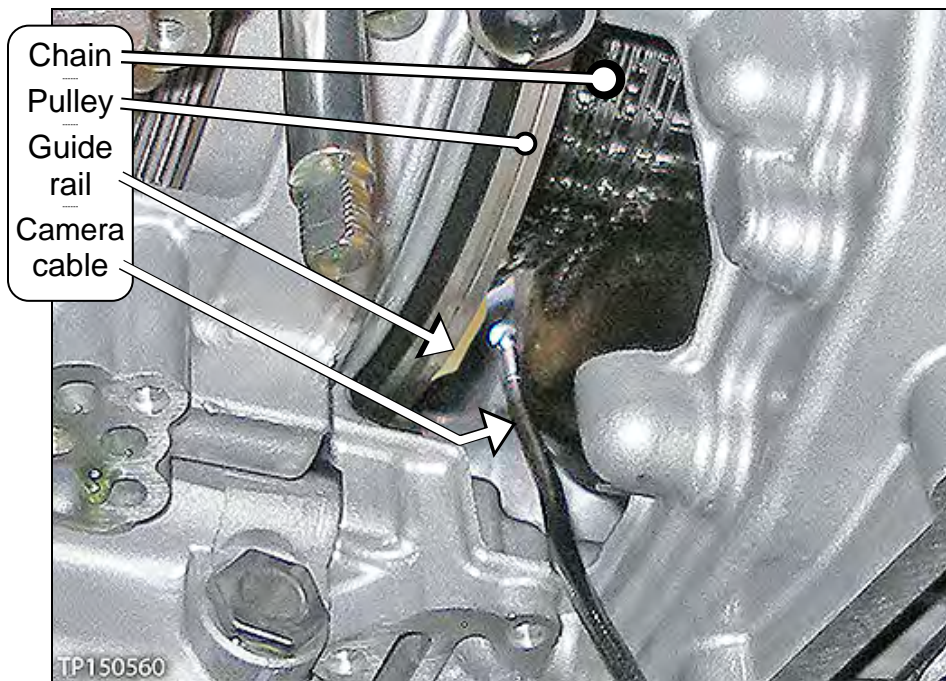


Figure 6

- Figure 7 shows where to insert the camera lens on the passenger side of the chain.

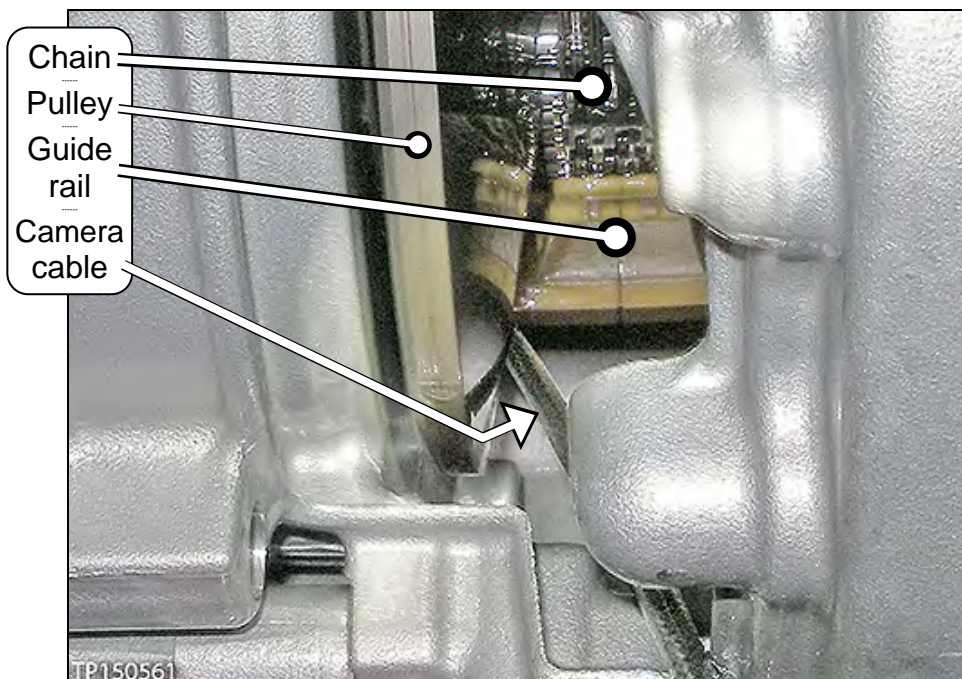


Figure 7

- Figures 8 and 9 shows the routing and location of the camera.

**NOTE:** The CVT's side cover was removed for easier viewing of camera location. **The side cover is not to be removed during boroscope inspection.**

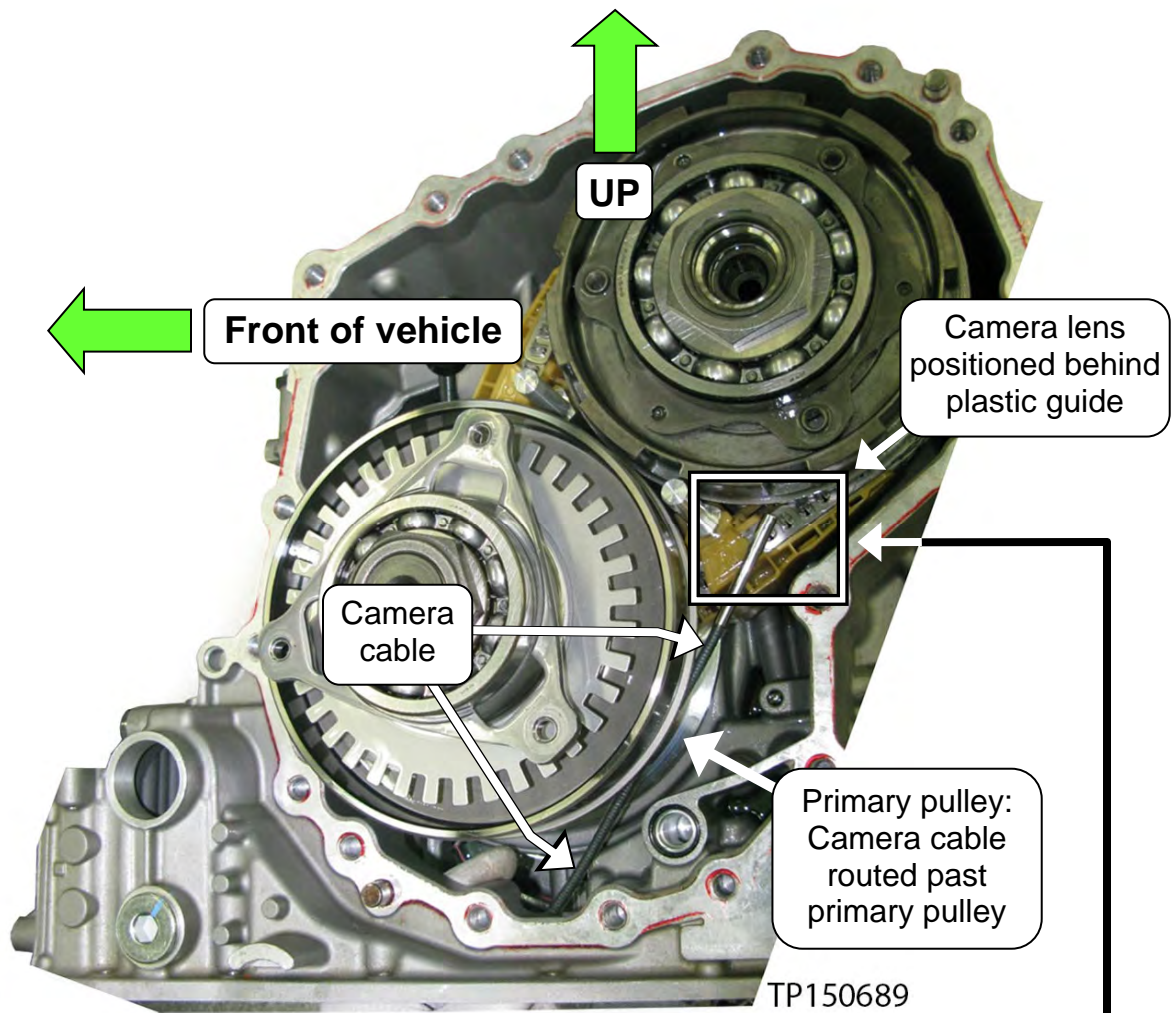


Figure 8

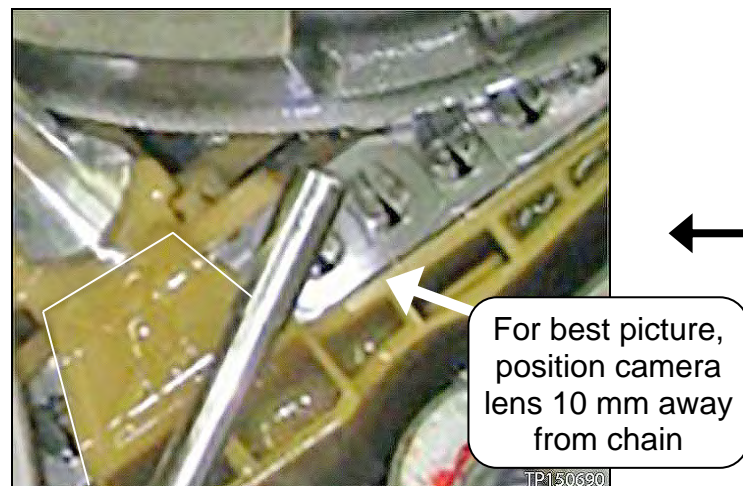


Figure 9

3c. Slowly and carefully turn the left front tire one full turn in the forward rotation to view all of the chain.

- Holding the borescope with one hand allows for turning the tire with the other hand (see Figure 10).

**CAUTION:** If the tire is rotated in the rearward rotation, the camera lens may get caught between the chain and pulley.



Figure 10

d. Is the chain OK on all 360° of both surfaces?

- Refer to Garage Video #546 if needed (see page 7).

**YES:** Proceed to step 4.

**NO:** If the chain inspection result is NG, proceed to CVT Assembly Removal on page 16.

4. Flush the CVT cooler(s).

**IMPORTANT:** A CVT Cooler flush is required after a valve body or CVT sub-assembly replacement. Refer to bulletin NTB15-013 to perform CVT Cooler flush.

5. Replace the valve body.

- For valve body replacement, go to page 85, **Control Valve (Valve Body) Strainer and Pan Installation.**

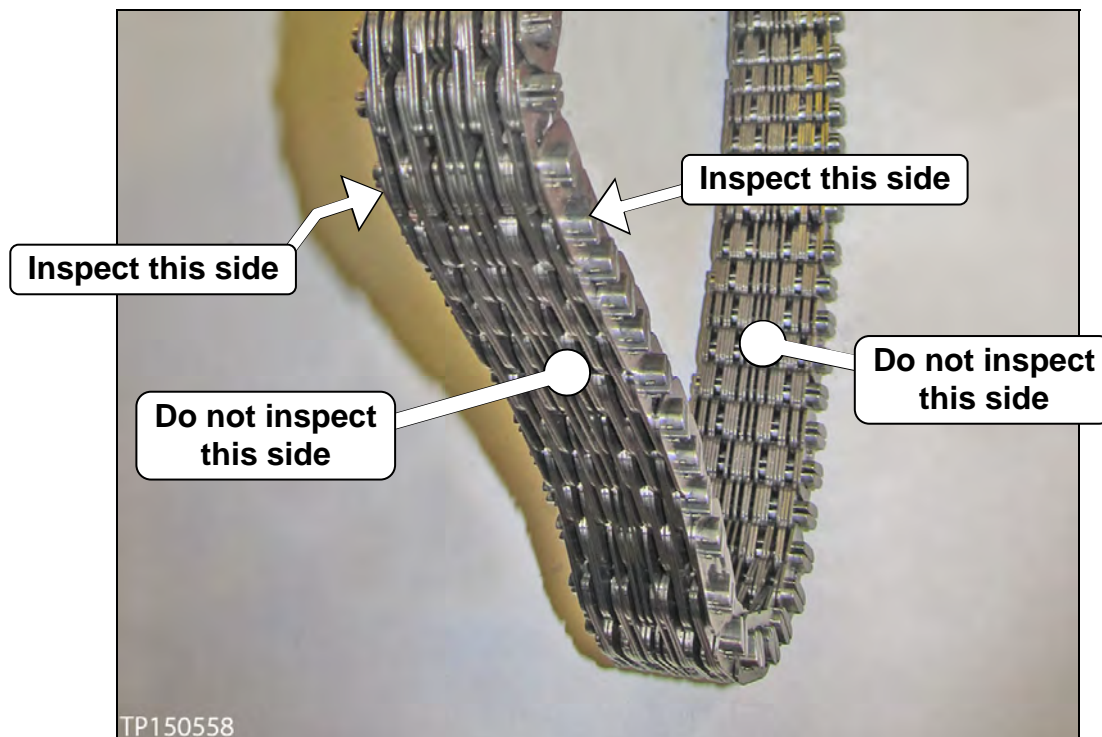


Figure 11



Figure 12: CVT chain

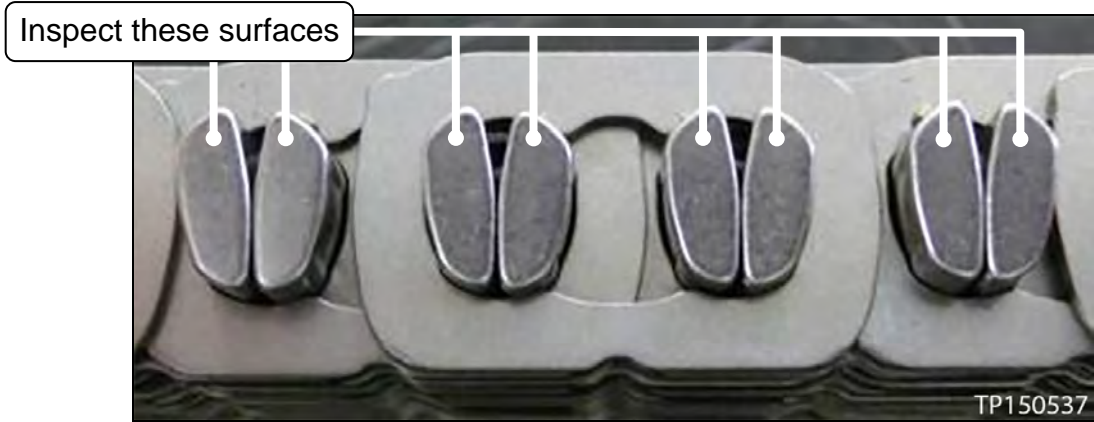


Figure 13: Close-up of area to be inspected

Pictures in Figure 14 and 15 were taken with borescope J-51951.



Figure 14

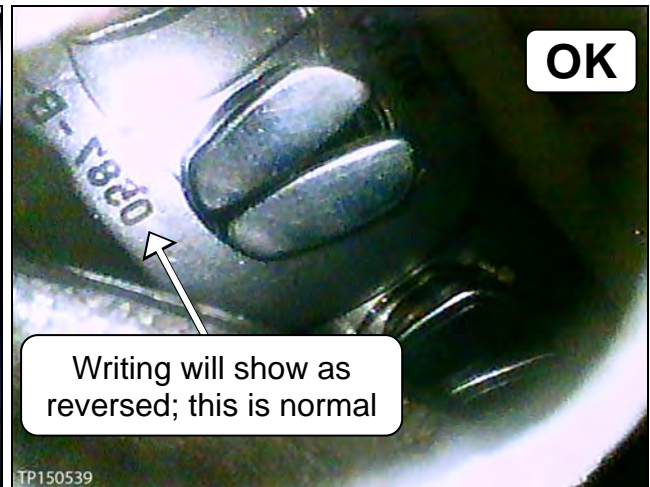


Figure 15



Figure 16



Figure 17

Pictures in Figure 18-19 were taken with borescope J-51951.

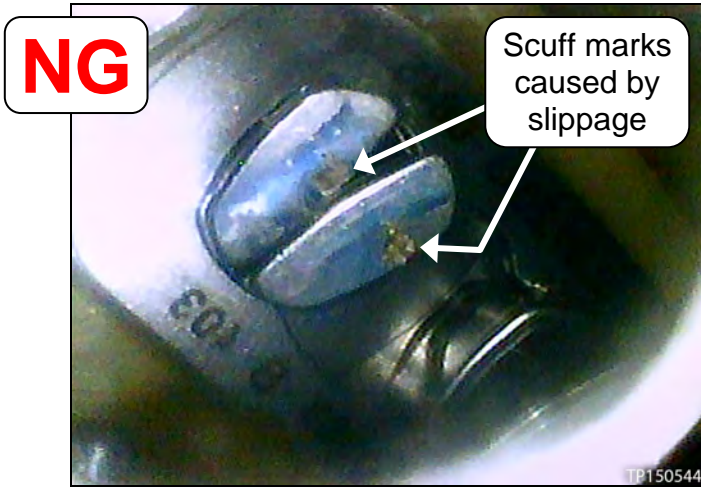


Figure 18

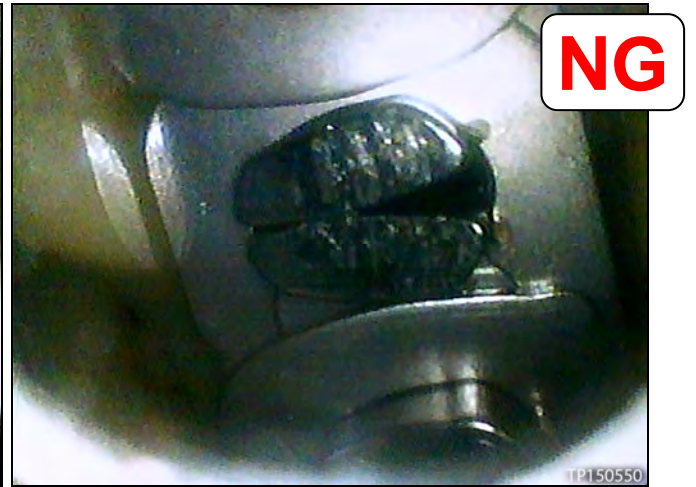


Figure 19



Figure 20



Figure 21

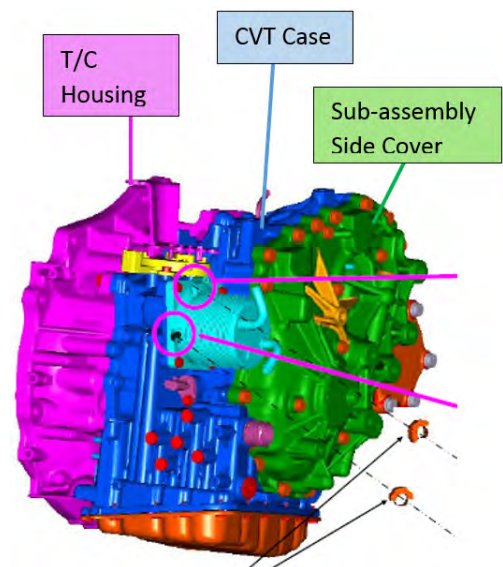


Figure 22

## CVT Assembly Removal

### Overview of Sub-assembly Repair

1. Precautions When Disassembling a CVT Assembly
2. Remove the CVT
3. Apply rust penetrant to dowel pins
4. Remove Converter Housing, Oil Seals, Oil Pump Cover, Oil Pump, Oil Filter
5. Confirm Thrust Bearing Type
6. Clean the CVT Case Surfaces
7. Clean Oil Passages in CVT Case, Oil Pump Cover, and CVT Filter Area
8. Install New Oil Pump
9. Temporarily Install Dummy cover, Torque Converter Housing and Filter Cover
10. Check Pulley Movement Characteristics
11. Install Sub-assembly – Pulley, Chain and Side Cover
12. Remove Side Cover and Install Lubrication Caps
13. Apply Sealant, Install Side Cover and Bracket Bolts
14. Confirm Parking Rod Operation
15. Check New Pulley Movement Characteristics
16. Torque Bracket Bolts
17. Adjust Total Thrust Bearing End-play
18. Clean Torque Converter Housing, Dummy Cover and Baffle Plates
19. CVT Reassembly
20. Install Valve Body, Strainer, and Pan
21. Install CVT Assembly





## Remove the CVT

1. Temporarily install the oil pan gasket and oil pan with four oil pan bolts to corners of the oil pan, hand tight (Figure 1A).

**NOTE:** A new valve body will be installed later in this procedure.

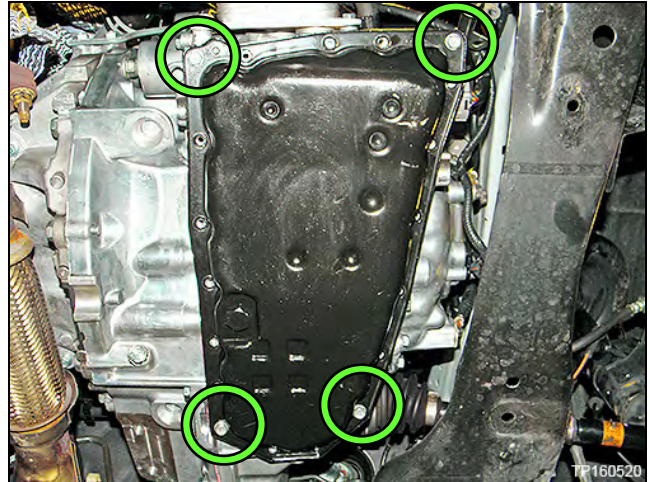


Figure 1A

2. Remove the CVT from the vehicle.
  - Refer to the ESM, section **TM-Transaxle & Transmission** for removal information.

### AWD Vehicles

#### CAUTION:

- Use extreme care when moving the axle in and out of the transfer assembly.
- To avoid seal damage or deformation, properly support and guide the axle.

3. Place the CVT on a workbench with the oil pan side down.
  - Use wood or plastic blocks to keep the CVT steady.

**CAUTION:** Do not deform the oil pan.
4. Remove the torque converter.

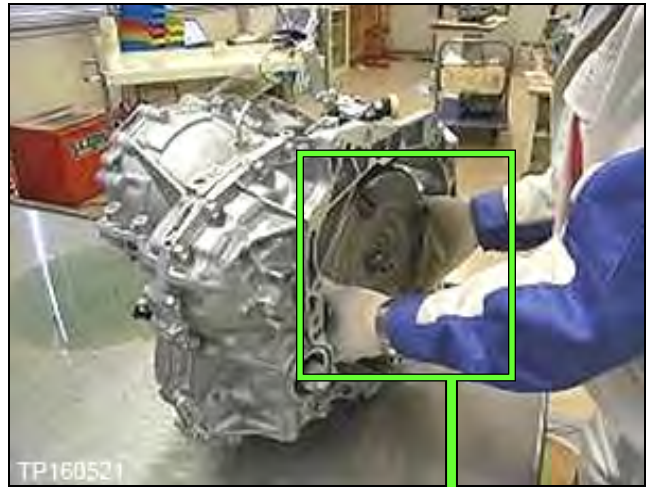


Figure 2A

5. Drain CVT fluid out of the torque converter.



Figure 3A

6. Remove the primary speed sensor.

**IMPORTANT:** The speed sensor will be re-used.

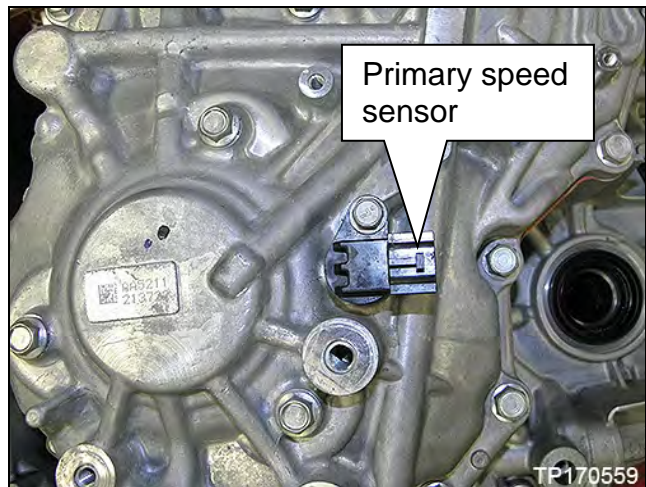


Figure 4A

## Remove the Converter Housing, Oil Seals, Oil Pump Cover, Oil Pump and Oil Filter

1. Remove all 24 converter housing mounting bolts (see Figure 1B).

**NOTE:**

- These bolts will be replaced with new ones and will not be reused.
- Apply rust remover to the dowel pins if needed.

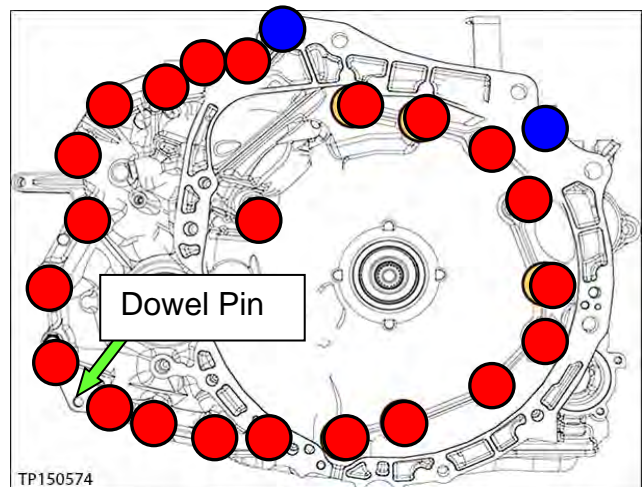


Figure 1B

2. Separate and then remove the converter housing from the CVT case.
  - Use Slide Hammer J-25721-A and Slide Hammer Bolt J-50255-UPD with J-Hook J-51923 at the cut out areas similar to the one shown in Figure 2B and Figure 3B.
  - Work around the CVT at specified areas, repeatedly until case halves separate.

**CAUTION: DO NOT use a pry-bar, chisel, etc. to separate the side cover from the CVT case.**

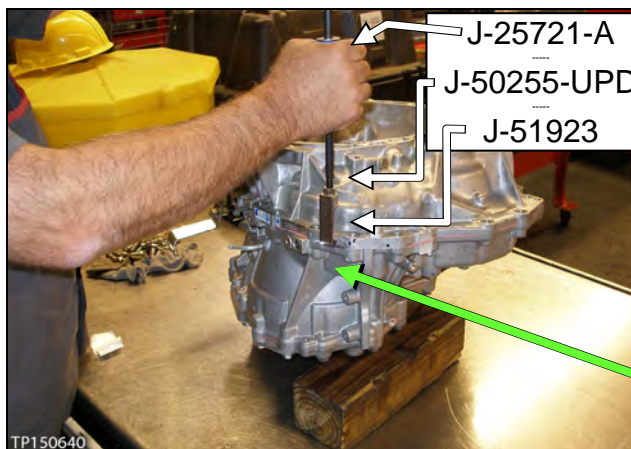


Figure 2B

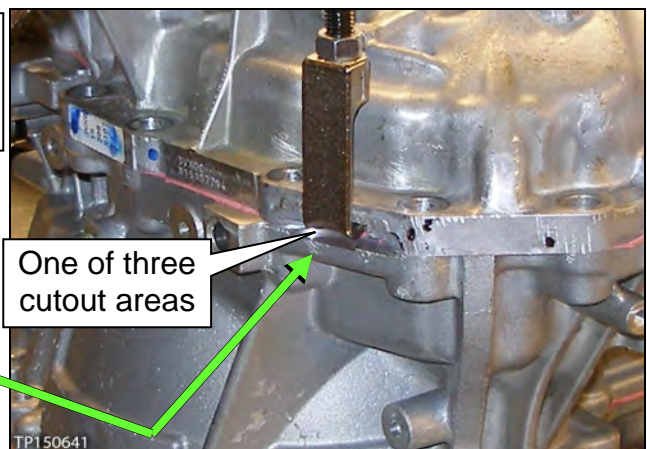


Figure 3B

3. Note the location of the pin shown in Figure 4B.

**CAUTION:** This pin can slip out during movement of the CVT while converter housing is removed.

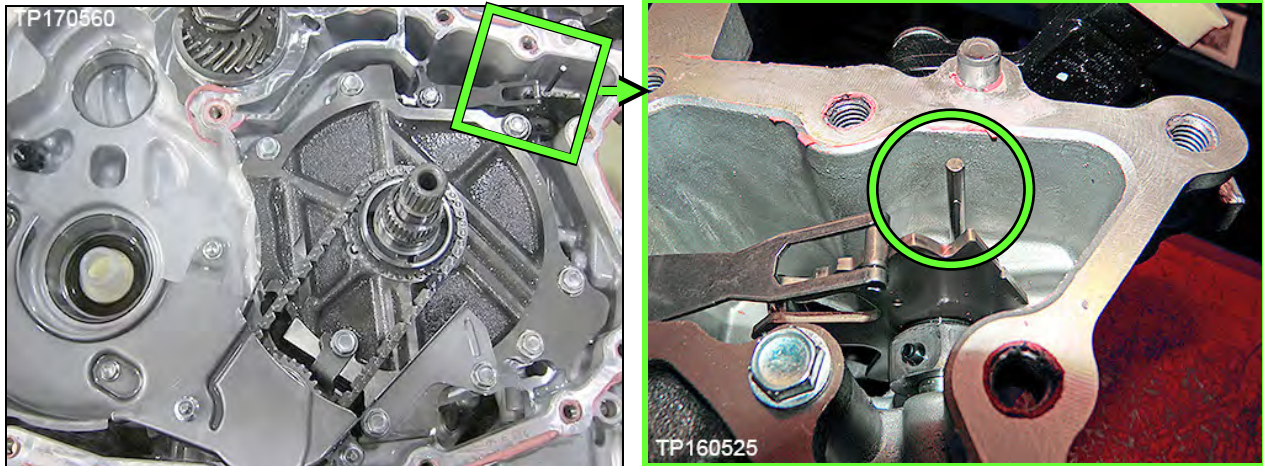


Figure 4B

4. Remove the O-ring from the input shaft.

- This O-ring will be replaced with a new one.

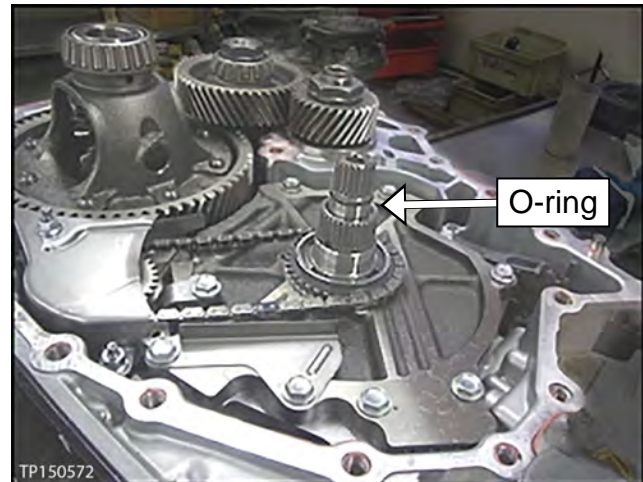


Figure 5B

5. Carefully remove the reduction gear assembly (Figure 6B).

6. Carefully remove the differential assembly (Figure 7B).

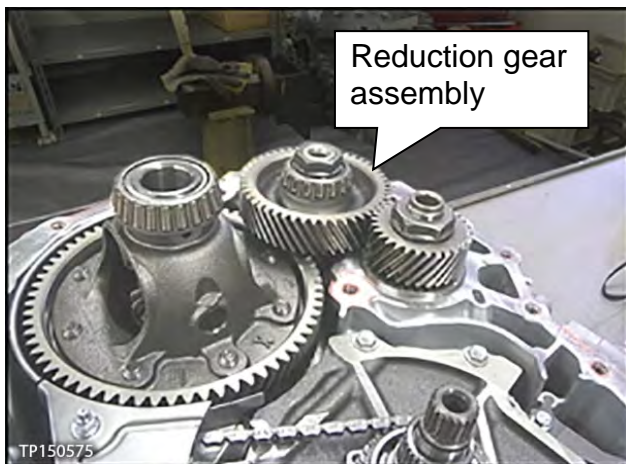


Figure 6B

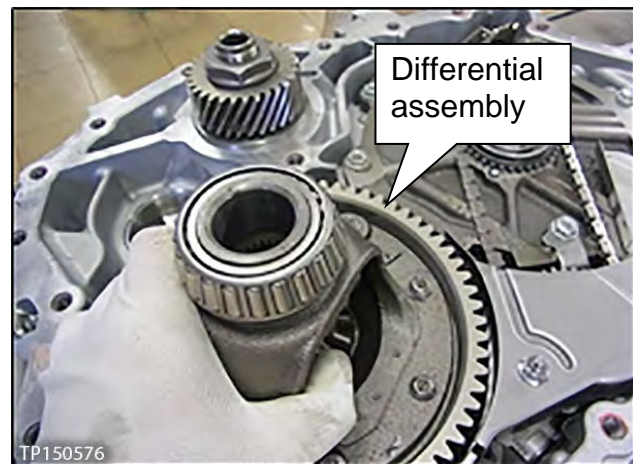


Figure 7B

7. Remove the following oil seals using suitable tools:

**CAUTION:** Be careful not to damage any of the seal bore surfaces.

- a. CVT case differential side oil seal (drive shaft seal).
- See Figure 8B.

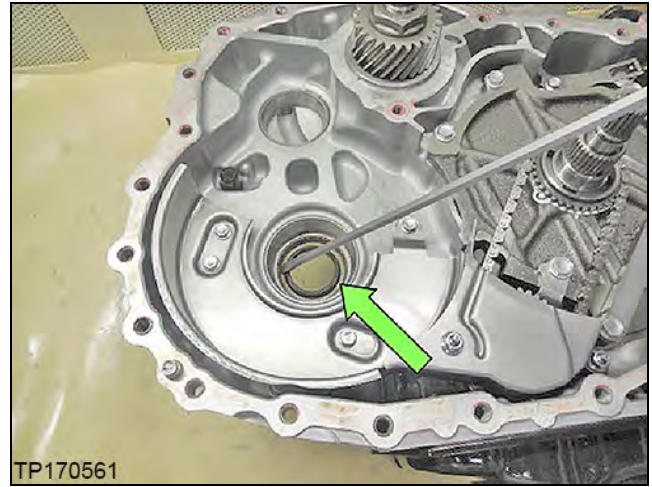


Figure 8B

- b. Torque converter seal (Figure 9B).

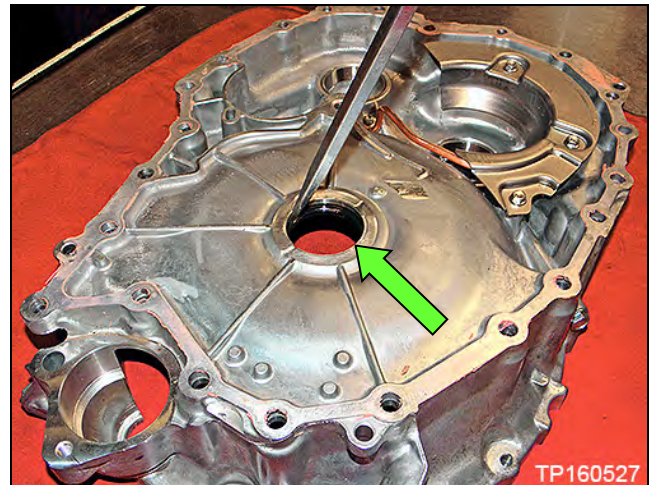


Figure 9B

- c. Converter Housing differential side right hand oil seal (drive shaft seal).
- See Figure 10B.

**NOTE:** All wheel drive transfer case O-ring will be replaced later in this procedure.

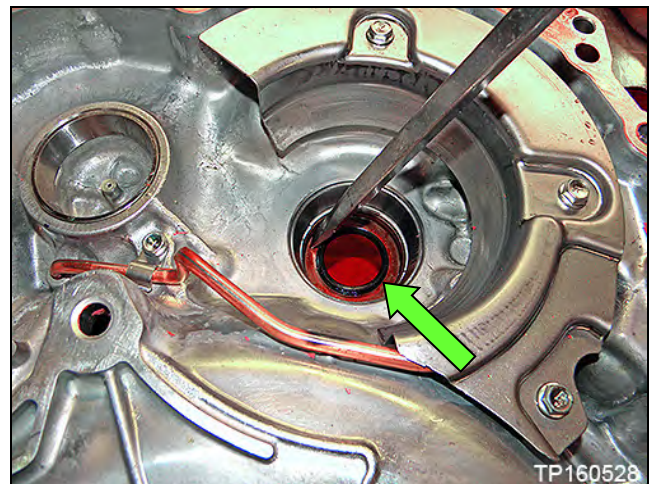


Figure 10B

8. Remove the two (2) nuts from baffle plate A, and then remove baffle plate A (see Figure 11B).

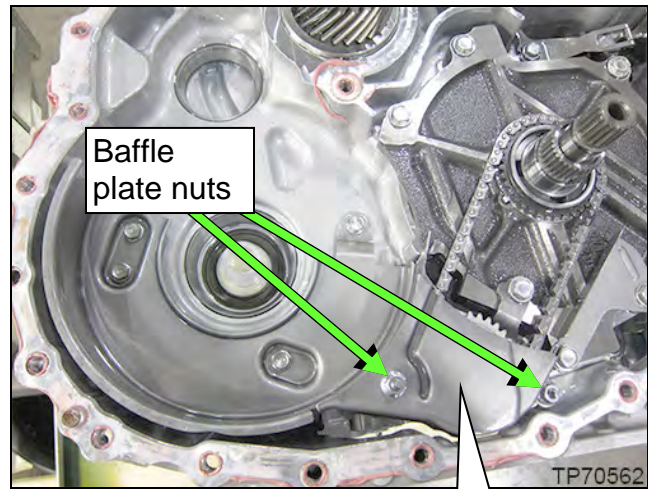


Figure 11B

Baffle plate A

9. Remove the oil pump chain, driven and drive sprockets as one assembly (Figure 12B).

- Spread the snap ring to remove sprocket (Figure 13B).

**IMPORTANT:** The drive sprocket has a specific top and bottom. Keep the sprockets and chain together after removed.

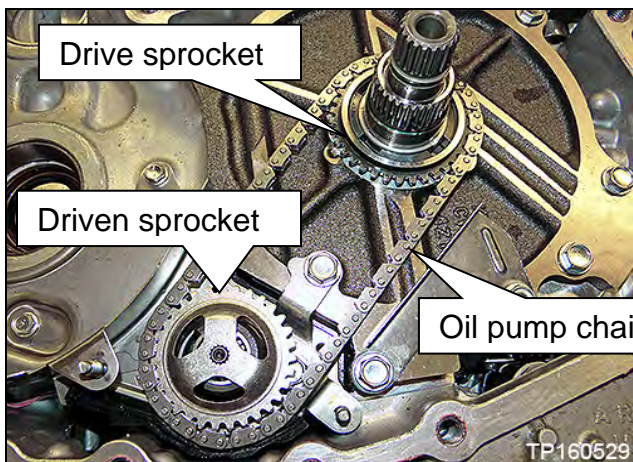


Figure 12B

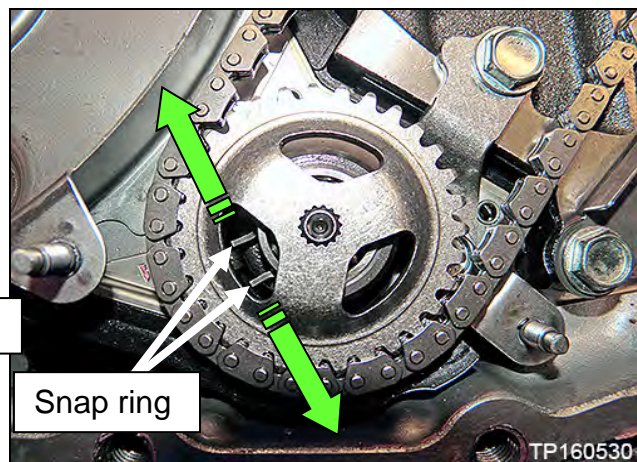


Figure 13B

10. Remove the following:

- a. "Pump cover" (dummy cover) thrust washer (Figure 14B).
  - This thrust washer will be reused.

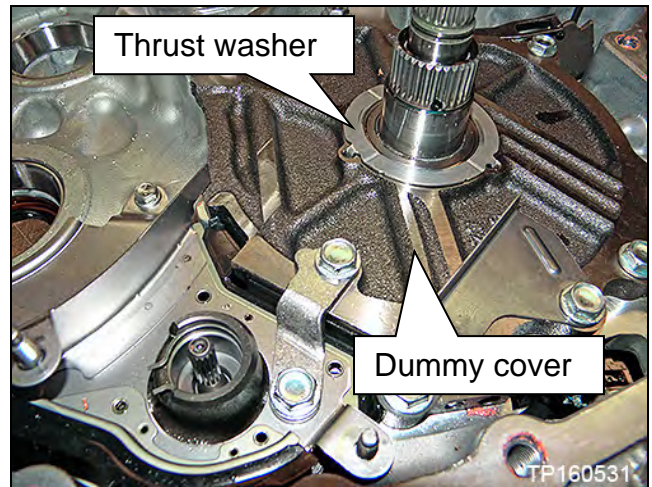


Figure 14B

- b. Oil pump snap ring (Figure 15B).
  - Lightly push the ends of the snap ring together, rotate one side upwards while pulling the snap ring towards the pump opening.
  - This snap ring will be reused, do not discard.

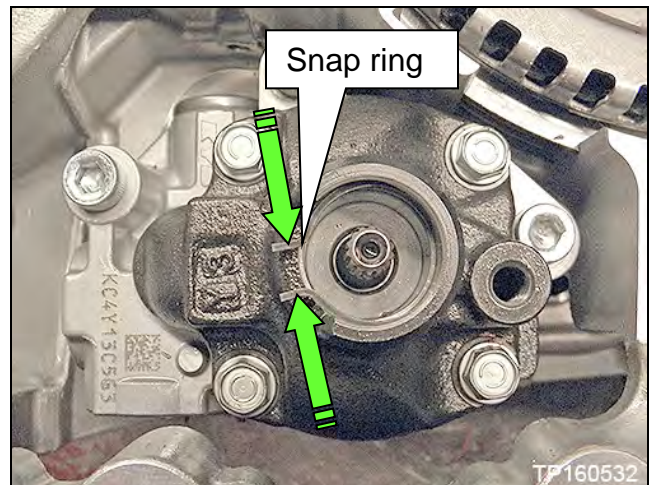


Figure 15B

- c. Oil pump bracket (Figure 16B).
  - Retained by two bolts.

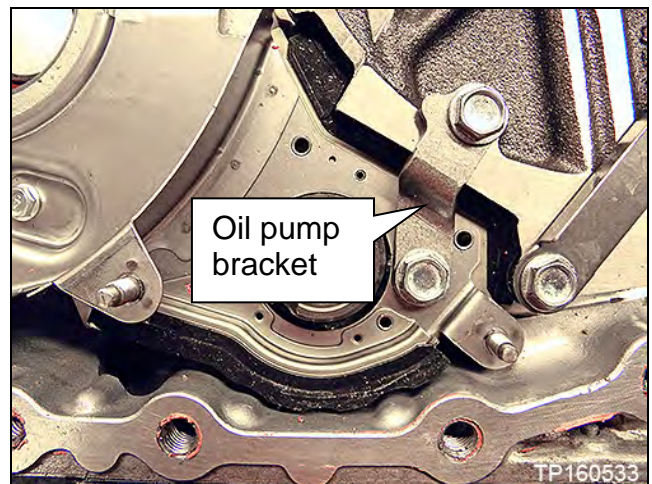


Figure 16B

11. Remove the four (4) bolts from baffle plate B, and then remove baffle plate B (Figure 17B).

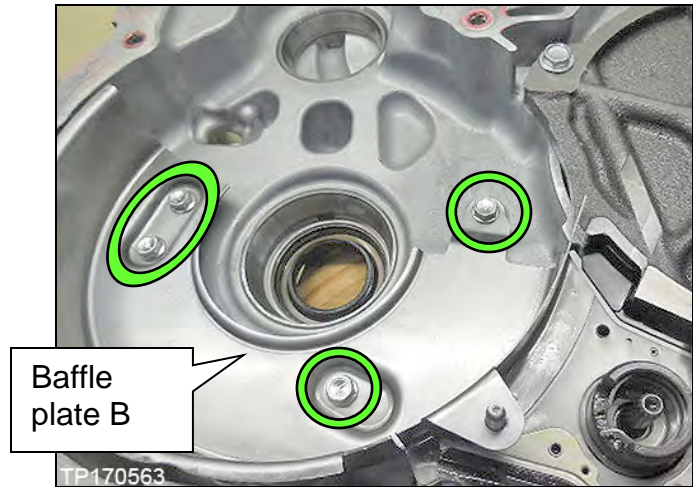


Figure 17B

12. Remove the two (2) bolts from baffle plate C, and then remove baffle plate C (Figure 18B).

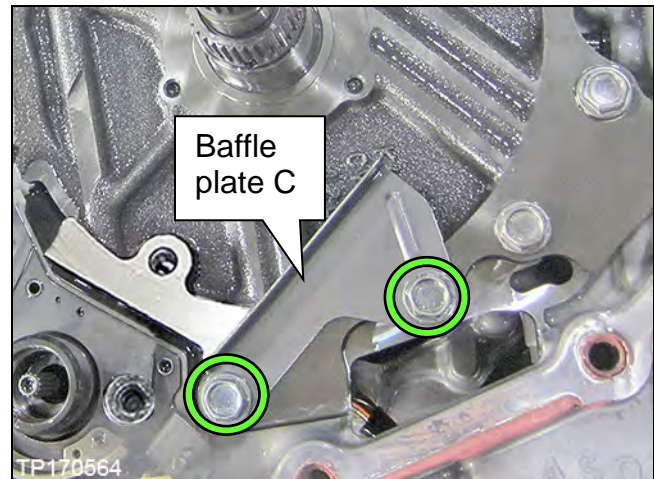


Figure 18B

13. Remove the five (5) dummy cover bolts, and then remove the dummy cover. See Figure 19B.

**NOTE:** These bolts will be reused.

**IMPORTANT:**

- Lift the dummy cover from sides **ONLY**. Do NOT lift from the input shaft (Figure 19B); this can lift the clutch pack out.
- Confirm that the input shaft O-ring has been removed. If not removed it can cause the clutch pack to lift out.
- Do NOT remove the lathe cut seals (white seals, Figure 20B) from the dummy cover. These seals will be reused.

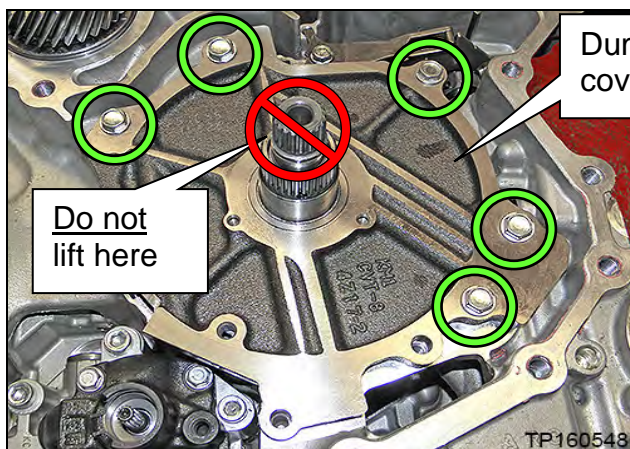


Figure 19B

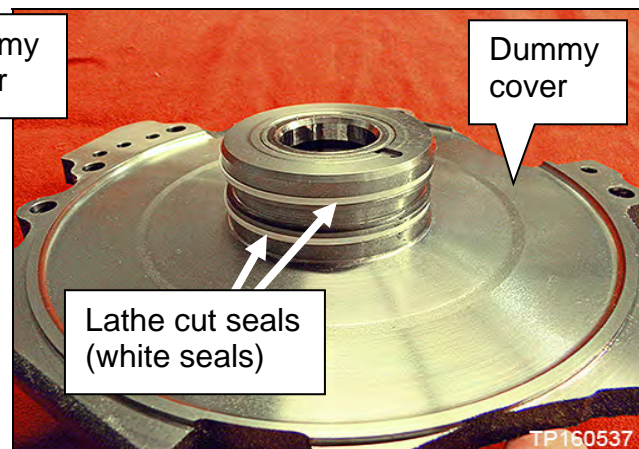


Figure 20B



## IMPORTANT:

- Depending on the model year and make of the vehicle there will be one of two different dummy covers and corresponding clutch packs; Type 1 (Thrust Bearing) and Type 2 (Thrust Bearing with Bearing Race) – See Figures 22B and 23B.
  - MY13-14 Pathfinder, MY13-17 Altima, and MY16-17 Maxima use **Type 1** (Thrust Bearing).
  - MY15-17 Pathfinder and MY15-17 Murano use **Type 2** (Thrust Bearing with Bearing Race).
  - Please see page 105 for **Type 1 and Type 2 Additional Reference Images**.

14. For **Type 1** remove the thrust bearing from the clutch assembly (Figure 21B) and then proceed to step 16.

- For Type 2, proceed to step 15.
- This bearing will not be re-used.

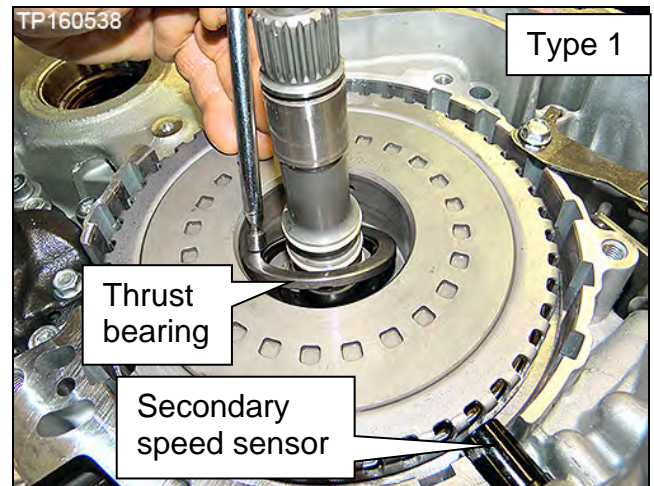


Figure 21B

15. For **Type 2**, remove the thrust bearing from clutch assembly (Figure 22B) and bearing race from the dummy cover (Figure 23B).

- These will be re-used later.

16. Wipe any metallic debris off of the face of the secondary speed sensor (Figure 21B).

**NOTE:** The position of the secondary speed sensor is the same for Type 1 or Type 2.



Figure 22B



Figure 23B

17. Remove the oil pump as follows:

- a. Remove the fitting bolt located above the corner of the oil pan gasket surface (Figure 24B).

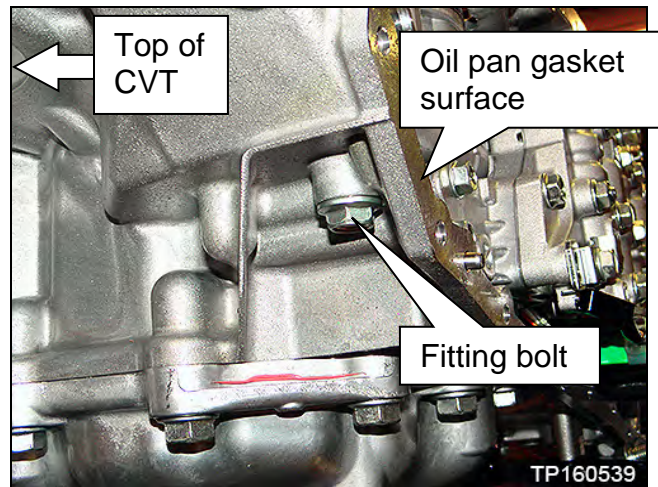


Figure 24B

- b. Remove the three oil pump Allen-head bolts, and remove the oil pump (Figure 25B).

**NOTE:**

- o Do NOT discard the Allen-head bolts. Bolts will be re-used.
- o New oil pump will be installed at later steps.

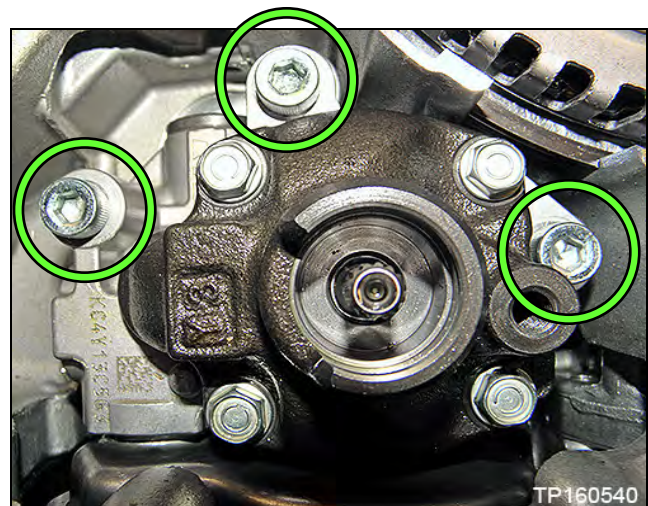


Figure 25B

18. Remove CVT fluid filter as follows:

- a. Remove the four (4) bolts and then remove the CVT fluid filter cover (Figure 26B).

**NOTE:** Bolts will be reused.

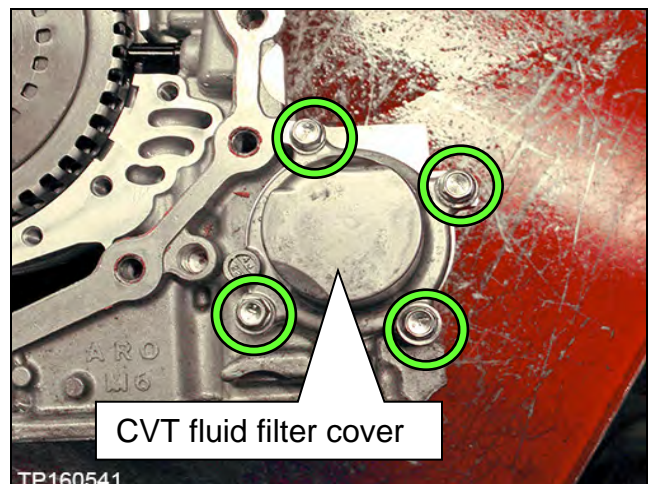


Figure 26B

- b. Remove the CVT fluid filter with grommet seal and O-ring seal (Figure 27B).
- Discard the oil filter and seal. They will be replaced.

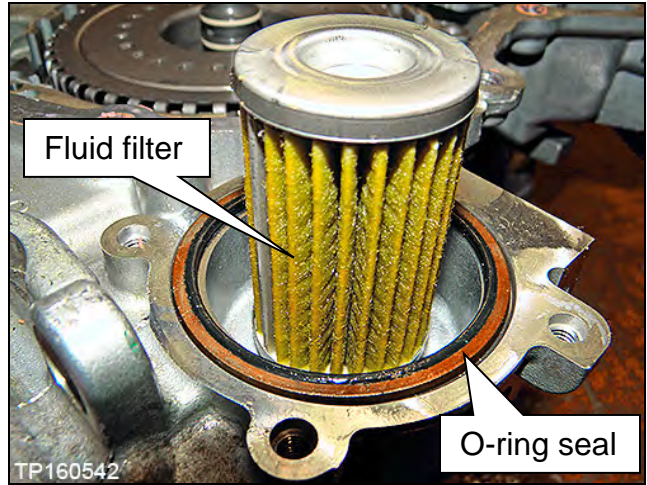


Figure 27B

- Grommet is fitted to the bottom end of the filter and is included with replacement filter (Figure 28B).



Figure 28B

## Clean the CVT case surfaces

1. Thoroughly clean the mating surfaces of the CVT case and Torque Converter Housing.
  - A plastic scraper can be used.

### CAUTION:

- **DO NOT** use sanding discs, similar abrasive tools, or metal blades.
- Use brake spray or equivalent solvent and lint-free towels only.
- Make sure brake spray or solvents used are compatible with local regulations.
- Avoid debris entering into the inside of the CVT.
- Make sure rust and debris have been cleaned off of dowel pins and receiving holes (Figure 1C).

2. Clean the dowel pins and dowel pin receiving holes of any rust or debris with emery cloth (Figure 1C).

**NOTE:** Use small wire brush or similar tool at the inside surface of dowel pin holes. **DO NOT SCRAPE CVT CASE** mating surfaces.

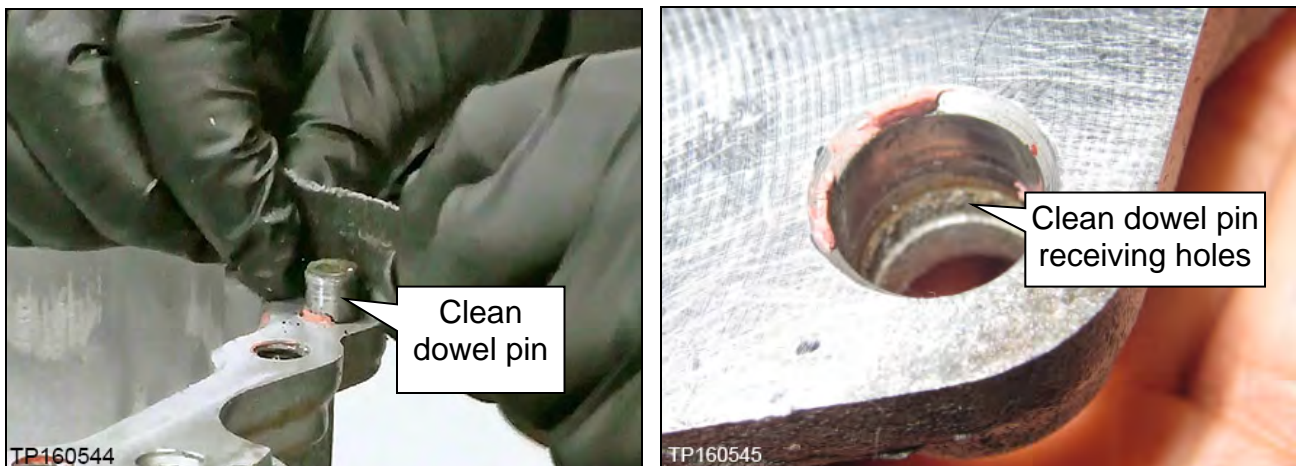


Figure 1C

## Clean the Oil Passages in the CVT Case, Oil Pump Cover, and CVT Filter Area

In the following steps:

- Brake cleaner and compressed air will be used to clean out oil passages in the CVT assembly.
- Make sure the brake cleaner or solvents are compatible with local regulations.

**WARNING:** Wear eye / face protection when using compressed air and cleaning fluids.

**CAUTION:**

- Regulate air pressure up to a maximum of 75 PSI.
- Do not use water-based (aqueous) cleaners.

1. Clean the area where the CVT fluid filter fits (Figure 2C).

- Make sure the old filter grommet seal is removed.

2. Clean the fluid passages to and from the filter (Figure 2C).

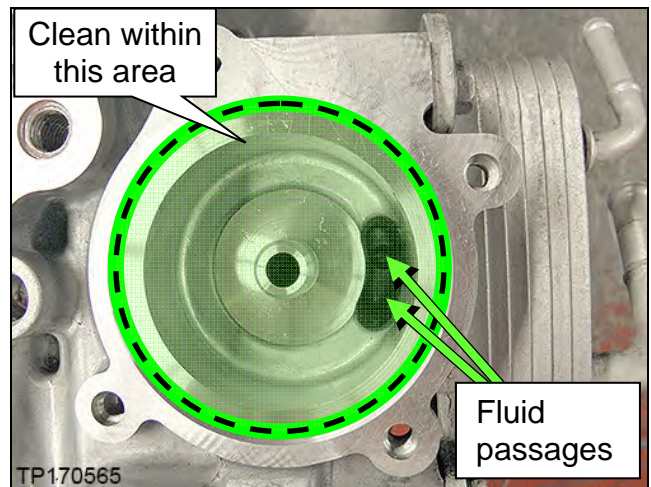


Figure 2C

3. Clean filter cover (Figure 3C).



Figure 3C

4. Spray brake clean in all oil passages of the CVT case where shown in Figure 4C and Figure 5C.
5. Remove lip seal if not already removed.
6. Apply compressed air in the same passages.

**NOTE:**

- Do not stand in front of the passages while using compressed air.
- Do not spray brake clean directly into clutch pack.

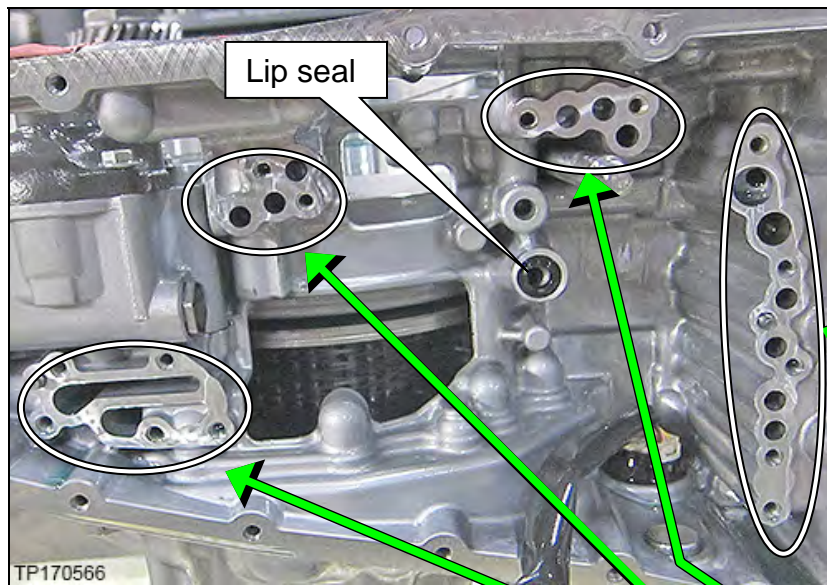


Figure 4C

Apply cleaner, and then 75 PSI maximum air pressure in these passages.

Air pressure comes out these passages.

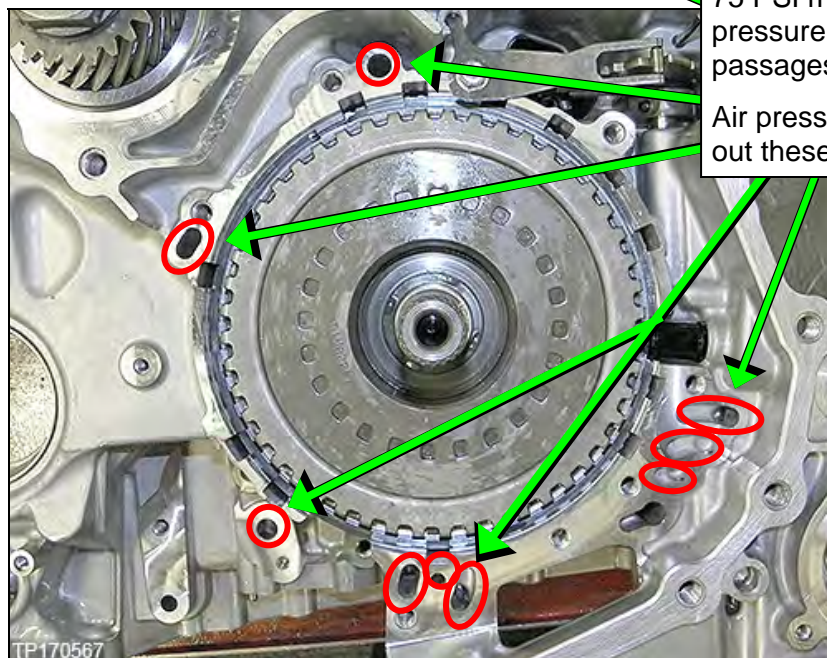


Figure 5C

## New Oil Pump Installation

1. Install the new oil pump using three (3) original Allen-head bolts (Figure 1D).

**NOTE:**

- Finger tighten the Allen-head bolts at this time.

**IMPORTANT:** A Parts Kits Reference Table is provided on page 102.

- Use the check off column on the left to ensure the correct new part is installed at each step.
- Attach this to the repair order.

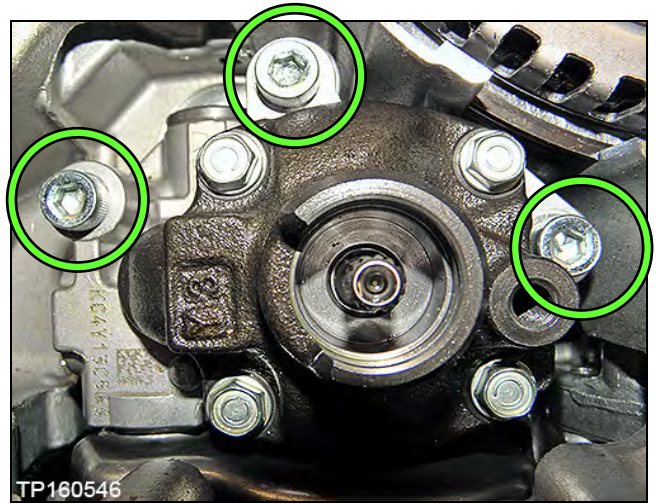


Figure 1D

2. Place new O-ring on the fitting bolt, and coat with CVT fluid (Figure 2D).

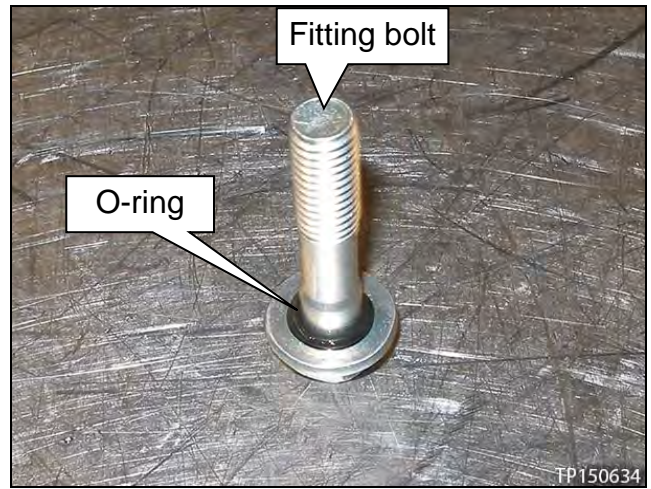


Figure 2D

3. Install the fitting bolt finger tight (Figure 3D).

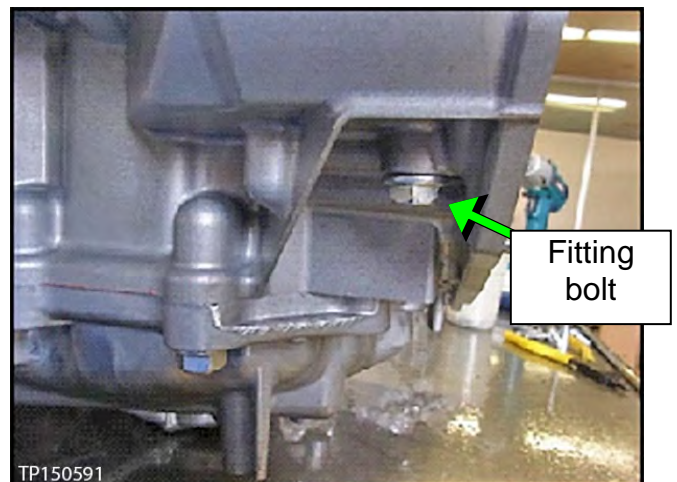


Figure 3D

4. Torque the three (3) Allen head bolts and fitting bolt.
  - Allen head bolt torque: 17.6 – 20.6 N•m (1.79 – 2.1 kg-m, **13.0 – 15.2 ft-lb**)
  - Fitting bolt torque: 26.0 – 30.0 N•m (2.65 – 3.06 kg-m, **19.2 – 22.1 ft-lb**)

5. Install the original snap ring (Figure 4D).

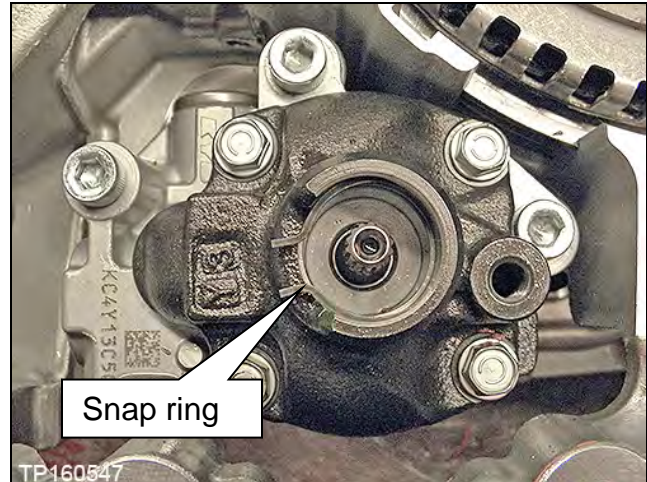


Figure 4D

6. Install the CVT fluid filter and components (Figure 5D).
  - Install a new filter with grommet (one part).
  - Install a new O-ring.
  - Confirm that all components and areas where components fit are thoroughly clean.
  - Apply CVT fluid to the grommet seal and O-ring before installing.
  - Install the filter cover.
    - Bolt torque 4.2 N•m (0.43 kg-m, **37.2 in-lb.**)

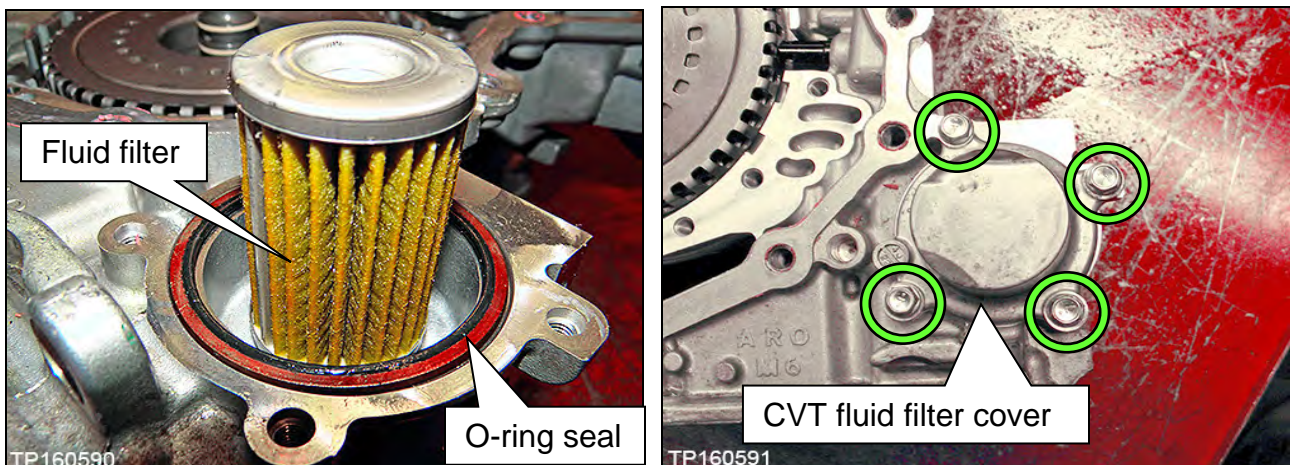


Figure 5D



## Replace the Side Cover – Pulleys and Chain (sub-assembly)

1. Temporarily install the dummy cover with 3 bolts, finger tight (Figure 1E).

### IMPORTANT:

- Do not install any thrust bearing to the clutch assembly bore at this time.
- If cover does not seat flush see trouble shooting **The Dummy Cover Will Not Sit Flush** on page 98.

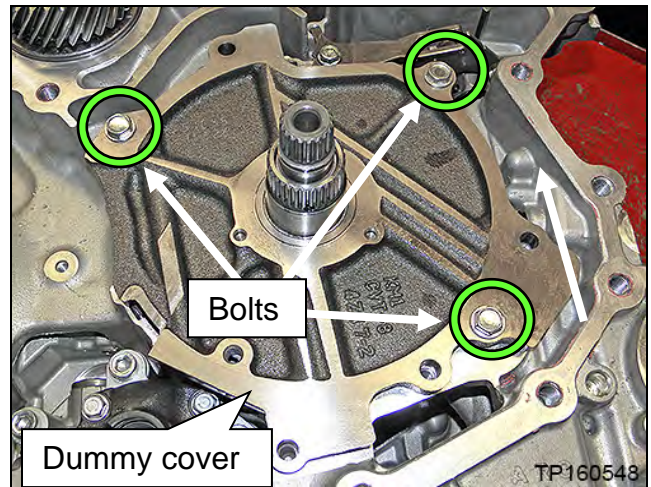


Figure 1E

2. Temporarily install the converter housing onto the CVT case with three bolts finger tight (Figure 2E).

### IMPORTANT:

- When fitting the CVT case surfaces, **DO NOT** use the bolts to draw in the case halves.
- Make sure the case surfaces are flush, and have no gaps prior to installing the bolts.

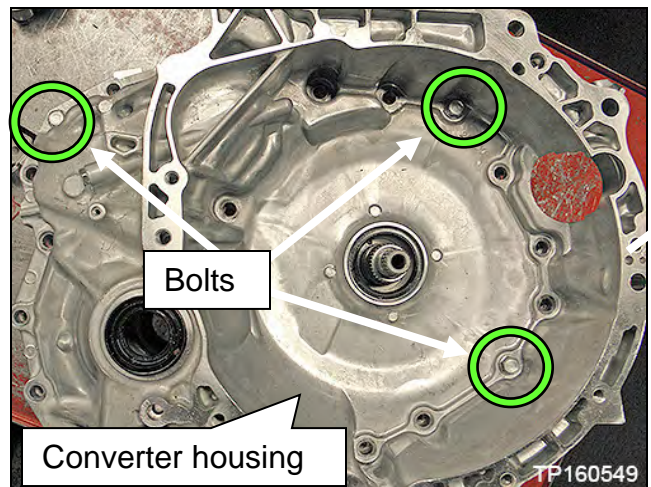


Figure 2E

3. Flip the CVT case so that the converter housing faces down and side-cover faces up.

- Lifting fixture J-51595 can be used for this step. This tool is not shown in Required Tools / Materials.

**CAUTION:**

- Do not hit the manual shaft (Figure 3E) while flipping the CVT; the manual shaft protrudes past the CVT case. Use a plastic / wooden block to support as needed.
- Note the location of the terminal connector harness. Do not pinch the terminal connector harness between the CVT case and work bench or supporting blocks.

4. Rotate the primary pulley by hand to check the pulleys rotational characteristics.

**IMPORTANT:**

- Remember the pulley's rotational characteristics. This will be used as a reference after the new side cover-pulleys and belt sub-assembly (sub-assembly) have been installed.
- This will be used as a reference later in the procedure to determine if the sub-assembly installation is successful or not.

**WARNING:** Do not place fingers between the pulley and the CVT case.

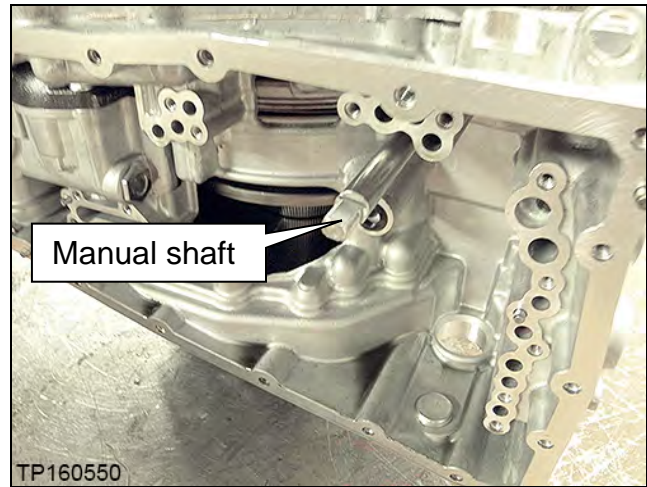


Figure 3E

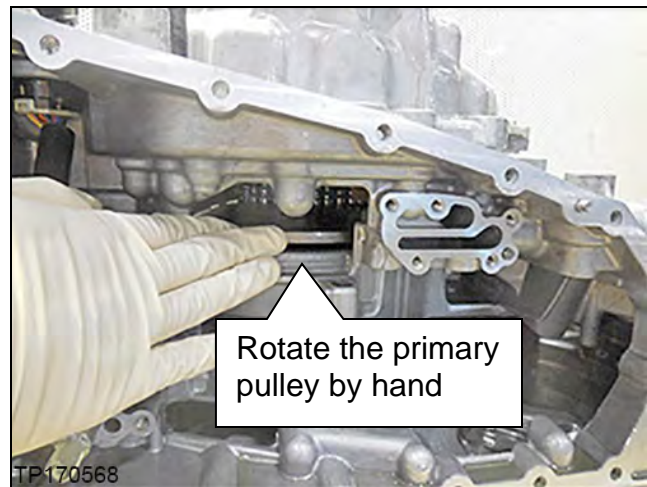


Figure 4E

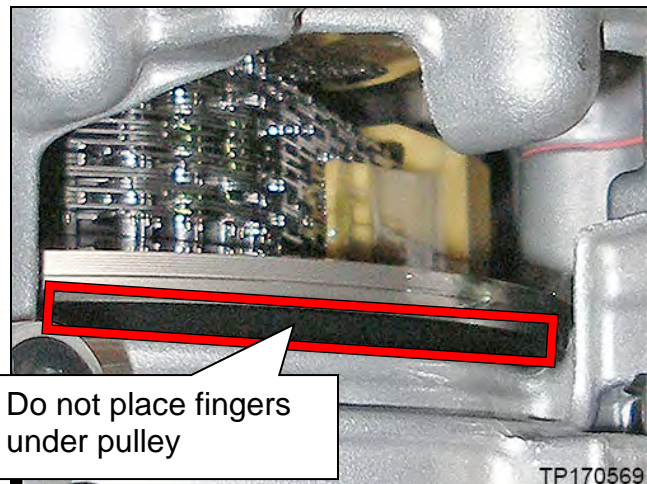


Figure 5E

**NOTE:** When working with sub-assembly install, uninstall, and bracket attachment, it is critical that CVT and sub-assembly are level. If not level, the pulleys and bearings can sit slightly at an angle and will hinder installation.

5. Remove the nineteen (19) side cover bolts (Figure 6E).

- Loosen the bolts with hand tools only.
- These bolts will be replaced with new ones and will not be reused.

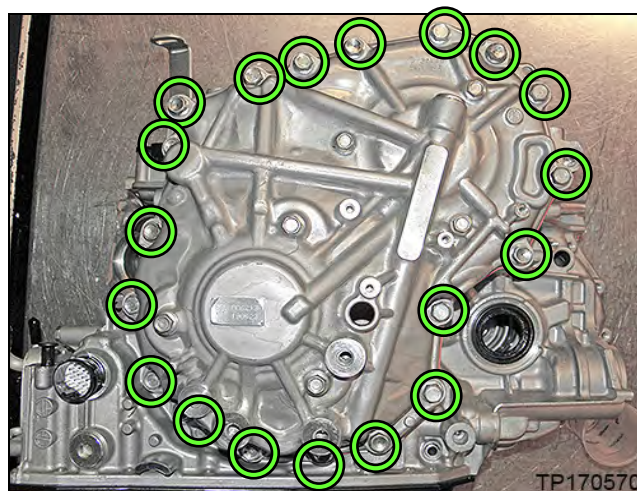


Figure 6E

6. Remove the six (6) pulley bracket bolts.

- Bolts will be reinstalled to the original pulley and belt sub-assembly.

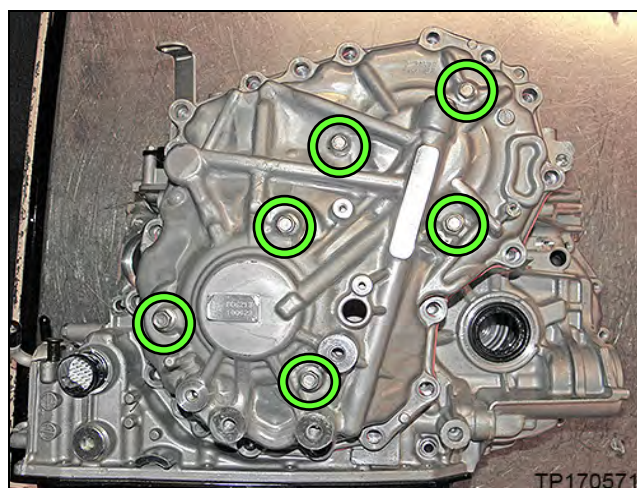



Figure 7E

7. Attach universal Lifting Fixture J-52082 with spacers J-52082-2 to the side cover as shown in Figure 8E.

**NOTE:** Install and tighten by hand only.


- a. Loosen all of the wing-nut bolts on the Lifting Fixture.
- b. Confirm that three (3) spacers (# J-52082-2) are present between the longer legs and triangle bracket as shown in Figure 8E.
- c. Install the Lifting Fixture to the CVT case at the six (6) bolt holes shown in Figure 7E on page 35.
- d. Tighten the two (2) joint to triangle brackets.
- e. Tighten the wing-nut bolts on the Lifting Fixture finger tight.

**CAUTION:** Do not cross thread the bolts when attaching to the CVT side cover.

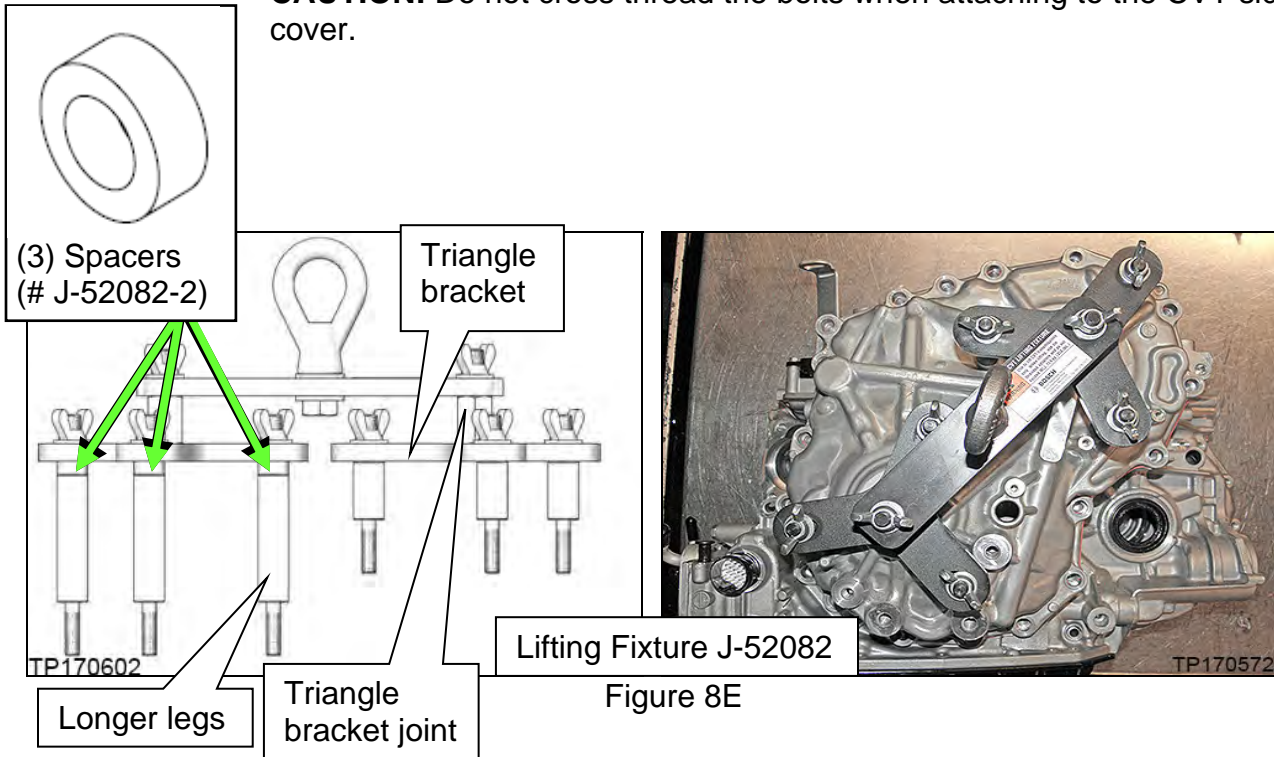

8. Install the two CVT Assembly Guide Pins (J-51959 - Guide Pins) as shown in Figure 9E and Figure 10E.

- The Guide Pins must be located next to the dowel pins.

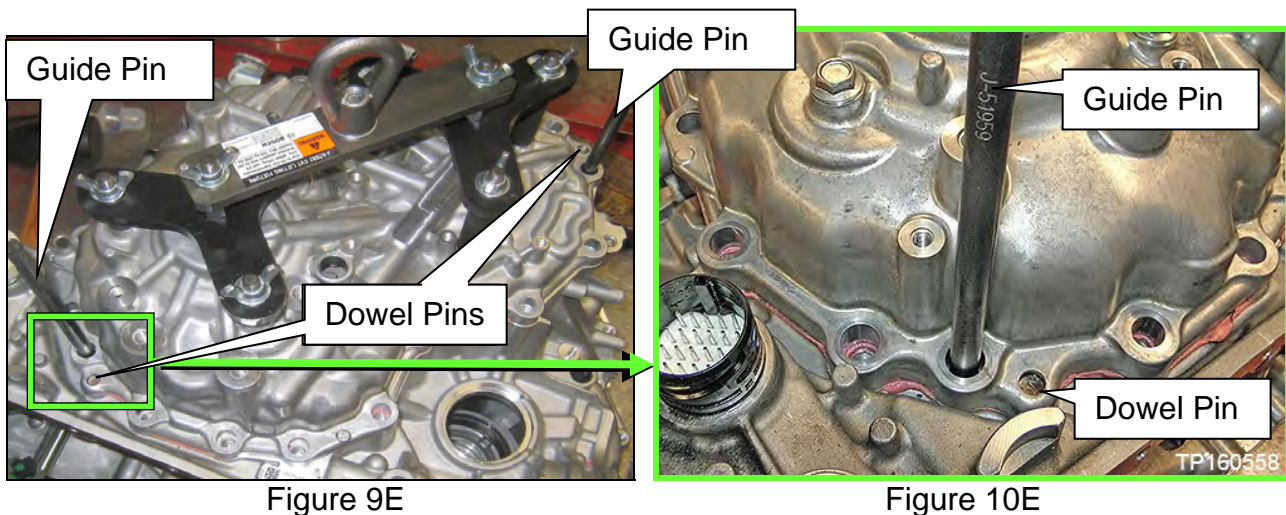


9. Raise the Lifting Fixture so that the CVT assembly weight is mostly supported by the Lifting Fixture and just slightly raised off of the work surface (using Tool #: J-52082).
10. Loosen the side cover with a slide hammer at the three points shown in Figure 11E.
  - Rotate between the 3 locations on the side cover until the CVT case separates from the sub-assembly; this can take more than one rotation to loosen sealant.

**CAUTION: DO NOT use a pry-bar, chisel, etc. to separate the side cover from the CVT case.**

**NOTE:** Apply rust penetrant to the two dowel pins as needed.

The following Figure is for reference only and does not show the lifting device attached.

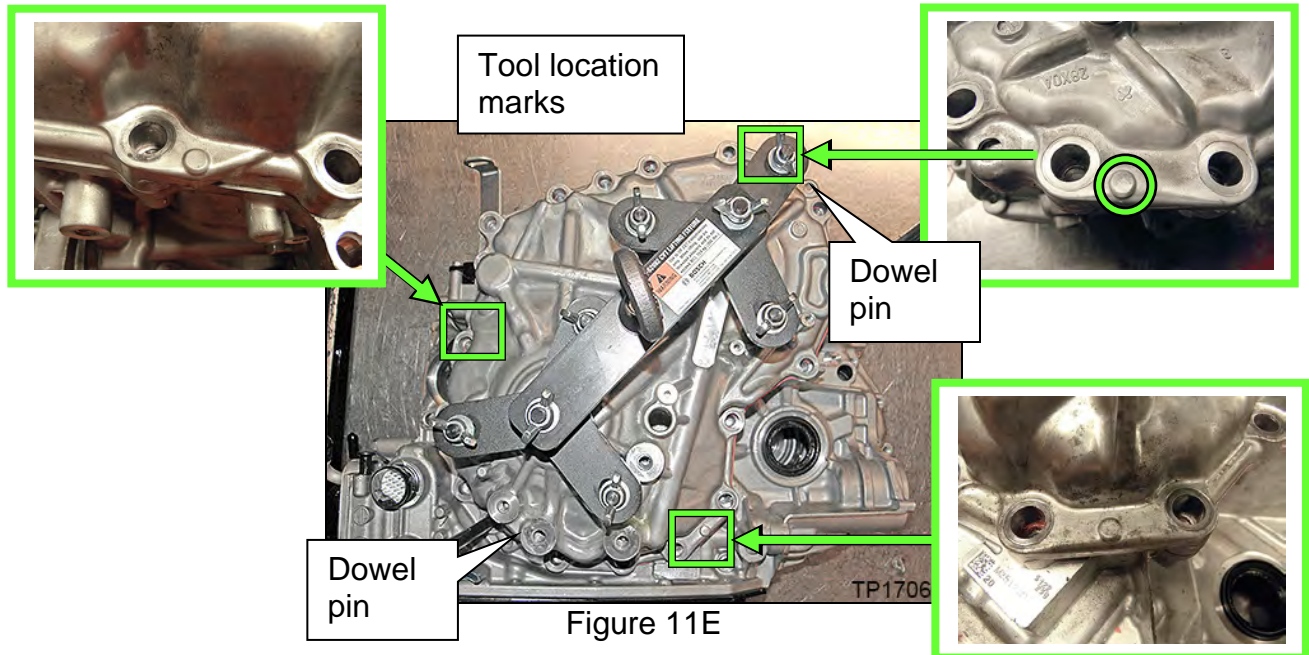


11. Raise the lifting fixture to remove the “side cover with pulleys and chain sub-assembly” (sub-assembly) from the CVT case (Figure 12E) and set aside.

**CAUTION:** Make sure the primary speed sensor is removed from the sub-assembly.

- Speed sensor will be reused.
- DO NOT discard speed sensor.
- This sub-assembly will not be reused.

12. Remove the lifting Fixture from the sub-assembly and replace all six (6) original bolts.

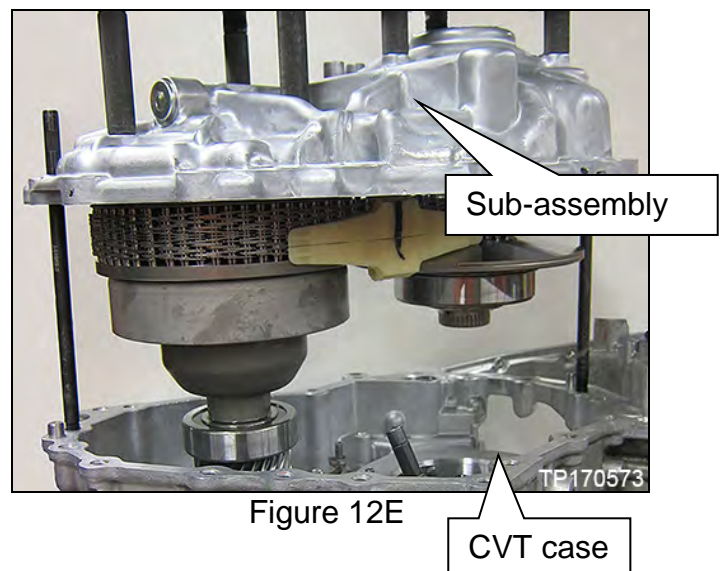

13. Thoroughly clean the mating surfaces of the CVT case (Figure 13E) that the sub-assembly was just separated from (a plastic scraper can be used).

- Clean off dowel pins.
- Confirm that dowel pins have remained in the CVT case. If not, remove them from the sub-assembly and relocate back to the CVT case.
- Reinstall guide pins if they were removed during case cleaning.

**CAUTION:**

- **DO NOT** use sanding discs, similar abrasive tools, or metal blades.
- Use brake cleaner or equivalent solvent and lint-free towels only.
- Make sure brake spray or solvents used are compatible with local regulations
- Avoid debris entering into the inside of the CVT.
- Make sure rust and debris have been cleaned off of dowel pins and receiving holes.

14. Remove the O-ring from the CVT case (Figure 14E).

- This O-ring will not be reused.

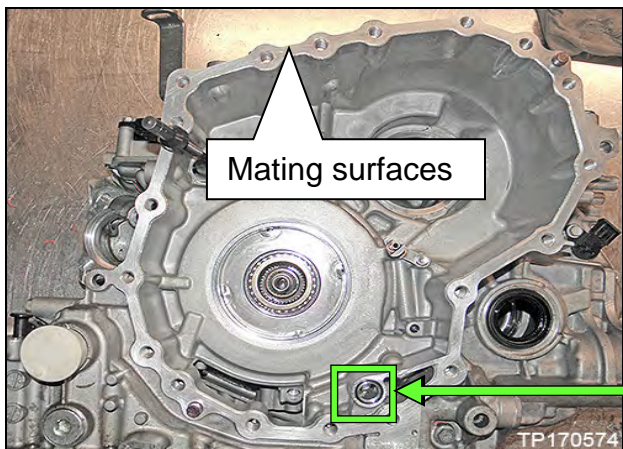


Figure 13E

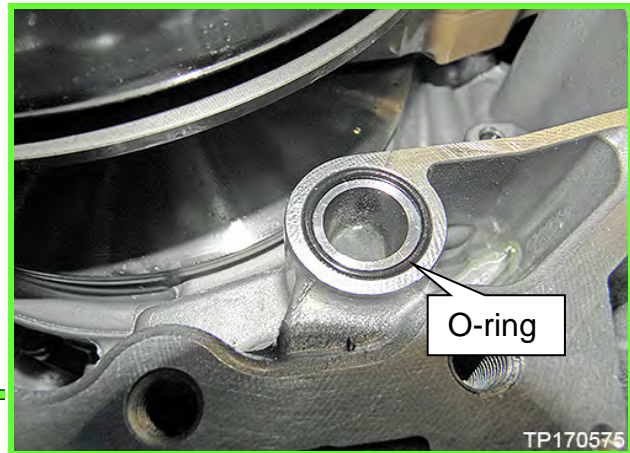


Figure 14E

15. Remove the thrust bearing from the planetary carrier plate (Figure 15E).

- **Thrust bearing will be re-used. DO NOT discard.**

**CAUTION:** If not found on the planetary carrier plate, the thrust bearing may still be attached to the primary pulley.

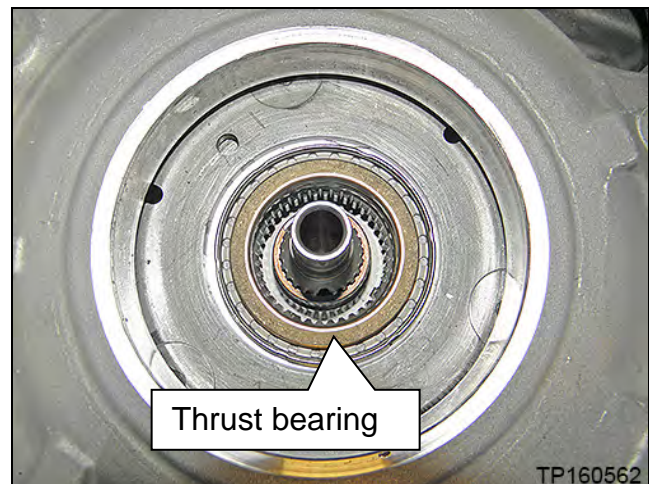


Figure 15E

16. Rotate the shift select lever counter clockwise to the “L” range position (Figure 16E), so that the parking rod is at its lowest position (Figure 17E).

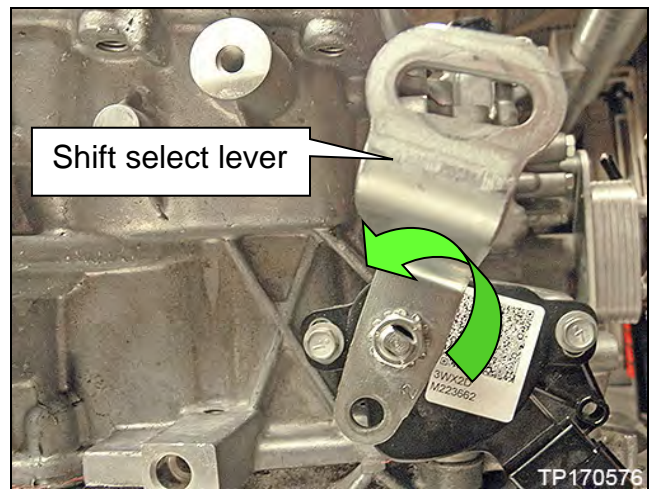


Figure 16E

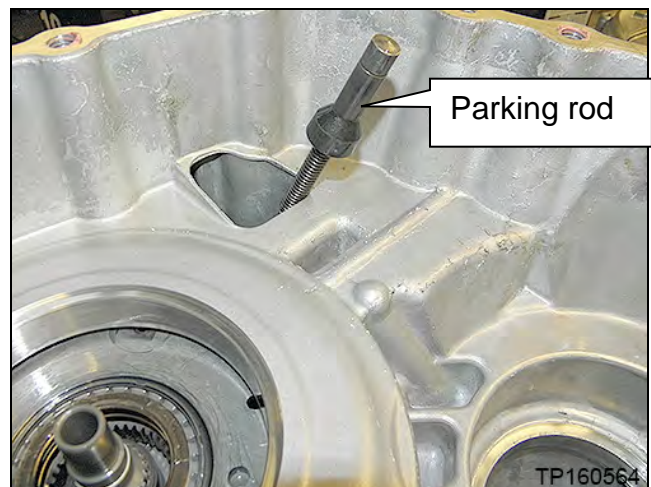


Figure 17E

17. Remove the six (6) bolts from the new sub-assembly and then remove their O-rings.

- These bolts will be reused.
- These O-rings will not be reused.

18. Attach Lifting Fixture to the new sub-assembly, and then raise sub-assembly out of shipping box.

**CAUTION:** Do not cross thread side cover holes when installing the Lifting Fixture. Always start bolts by hand.

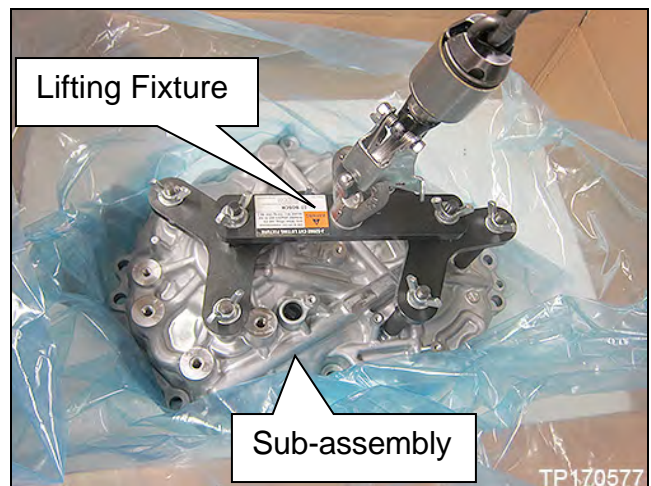


Figure 18E

19. Install the original thrust bearing onto the primary pulley of the new sub-assembly (Figure 19E).

**CAUTION:** The thrust bearing has two different sides. Reference Figure 19E for correct bearing orientation.

- Apply a thin layer of petroleum jelly or equivalent to the original thrust bearing to hold it in place on the primary pulley.
- The thrust bearing must sit flush with primary pulley surface (Figure 19E).
- Re-use the thrust bearing which was removed from the planetary carrier plate.

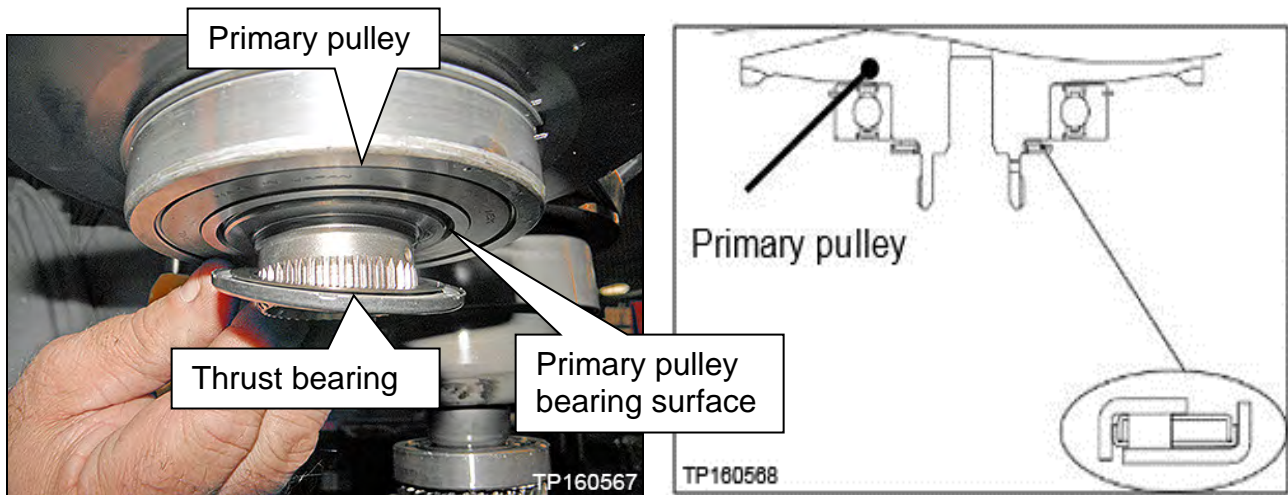


Figure 19E



20. Coat the primary pulley bearing, secondary pulley gear teeth and the secondary bearing with CVT fluid prior to installation (Figure 20E).

**IMPORTANT:** Do NOT apply sealant to the case at this time. The sub-assembly will be sealed later in this procedure.

The following Figures are for reference only and may or may not have the sealant in place, or have the old sealant removed. Clean the surfaces and apply sealant when and where instructed.

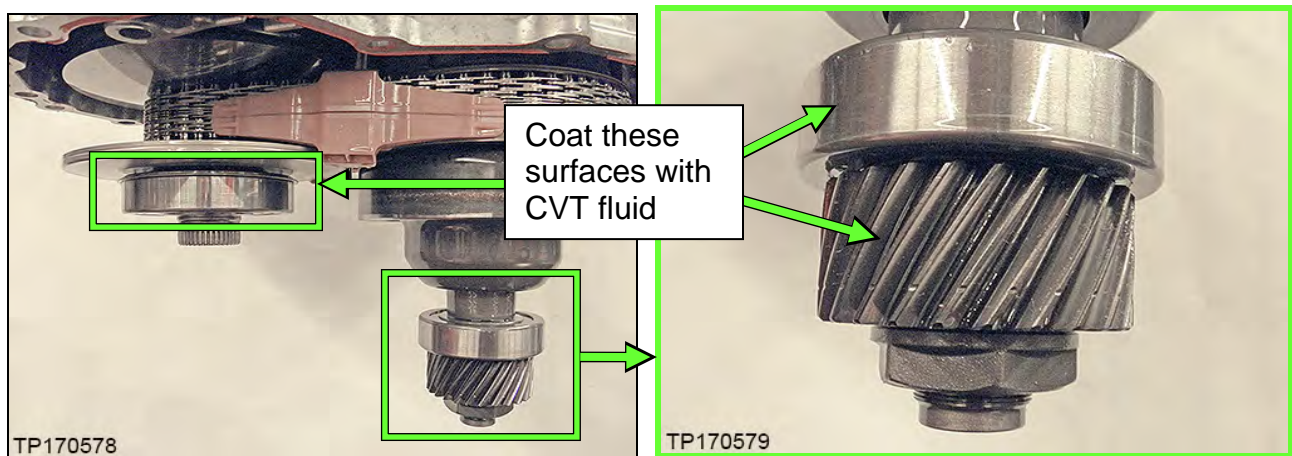


Figure 20E

21. Position the new sub-assembly over the CVT case and then lower it just far enough to allow the Guide Pins to be inserted into their appropriate sub-assembly holes (the Guide Pins are different lengths).

**IMPORTANT:** Do NOT allow the output gear to contact the lubrication tubes when the side cover is positioned over the guide pins.

**NOTE:** Guide pin locations are shown in Figure 9E on page 36.

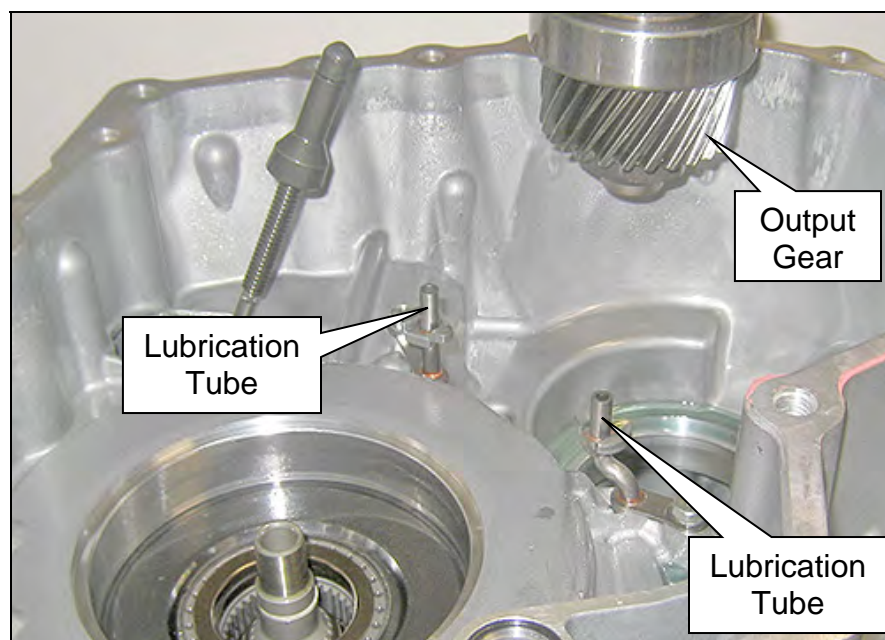



Figure 21E

**IMPORTANT:**

Before continuing, it is recommended that you review and understand the instructions on pages 42 to 47.

- Confirm dowel pins are clean – this will ease installation.
- **The sub-assembly will lower into the CVT case without applying extra vertical force.**
- IF THE SUB-ASSEMBLY DOES NOT LOWER COMPLETELY,  **! PHYSICAL INTERFERENCE IS PRESENT.**

Key Technique: Raise to remove weight on interference, adjust as necessary, and then lower again.

Use the “gap size” between the sub-assembly and the CVT case to determine the cause of interference. At any given gap, only 1 item will be the cause of interference

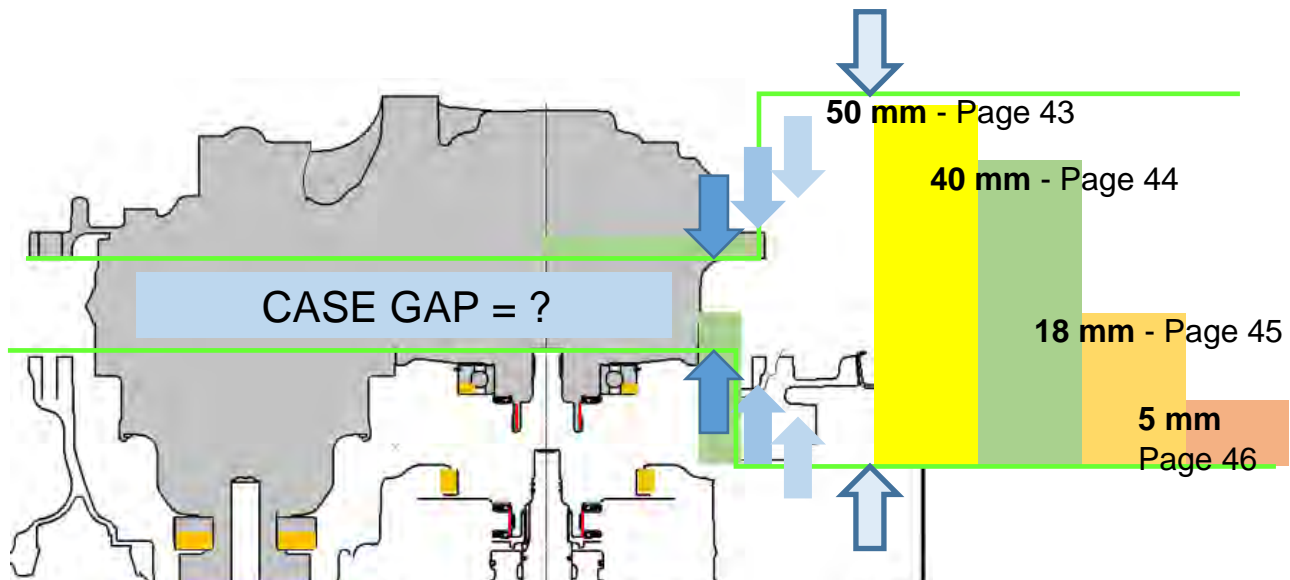


Figure 22E

Case gap

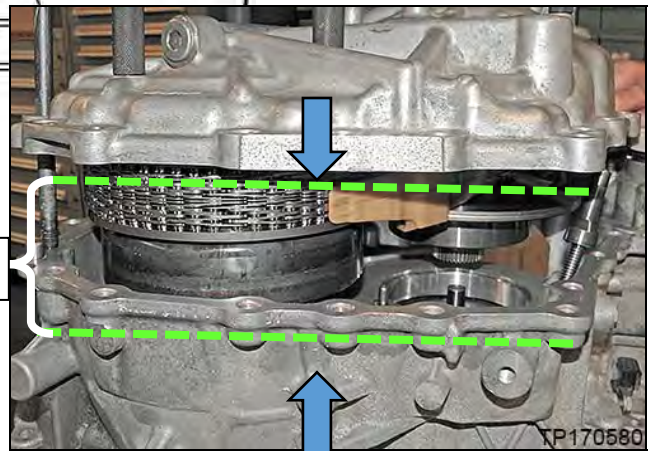


Figure 23E

22. Carefully lower the Lifting Fixture to install the sub-assembly into the CVT case as follows:

- While visually looking down into the bore (Figure 25E) to confirm that the output gear is clearing the CVT case bearing bore,
  - a. Level the sub-assembly by placing hands on top to guide it into the CVT case.
  - b. Lower the sub-assembly until a gap of **40 mm (1.6 inch)** is present to the CVT case (Figure 28E on page 44) and then proceed to step 23.
    - If the sub-assembly will not lower any farther than 50 mm (2 inches) the output gear has not cleared the bearing bore (Figure 25E).

### Sub-assembly will not lower past 50 mm (2 inches)?

- Interference is present between the output gear and bearing bore and are highlighted with yellow in Figure 24E and 25E.

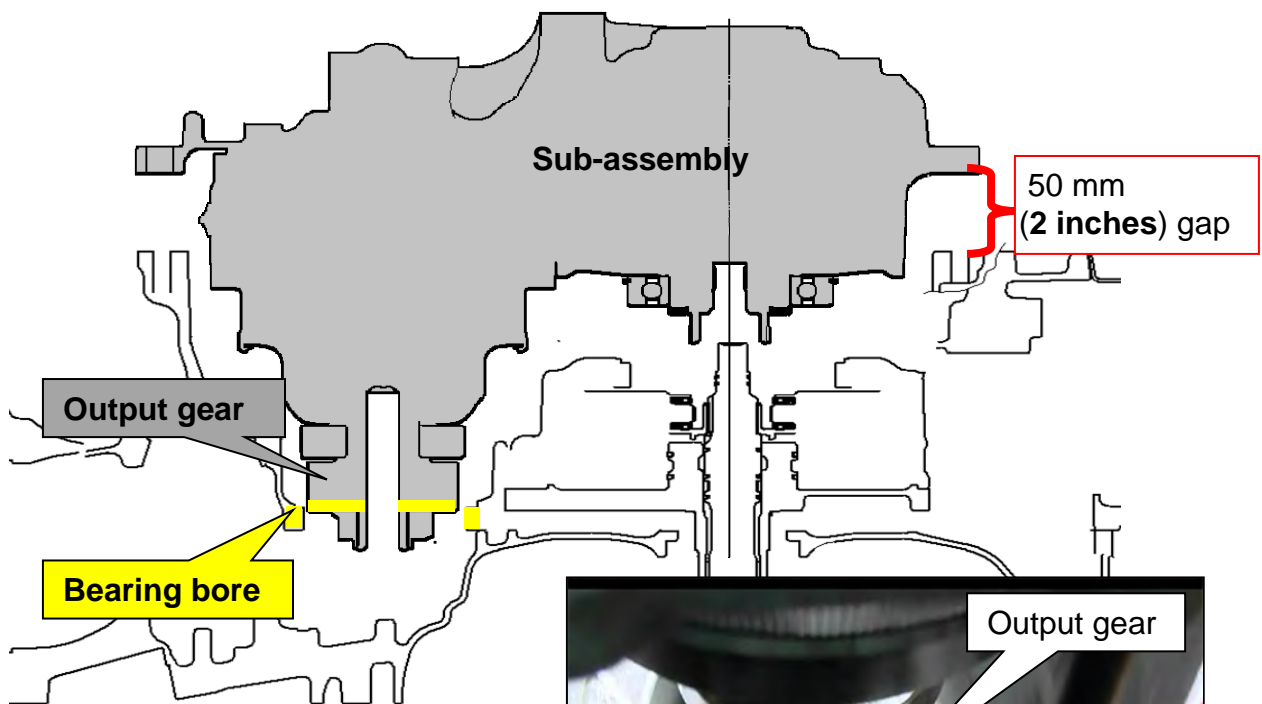


Figure 24E

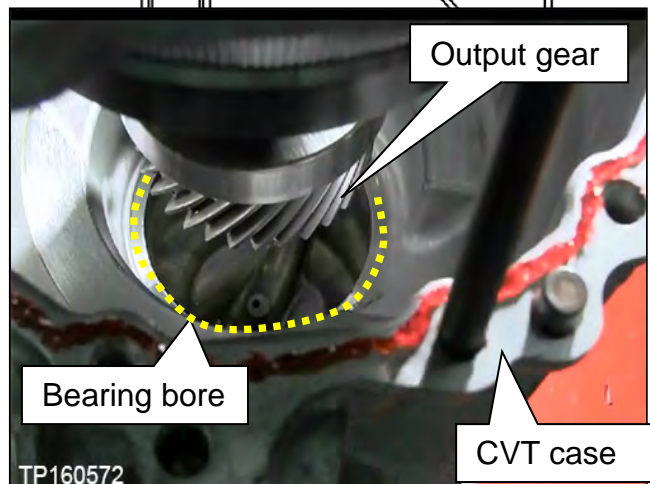




Figure 25E

23. Install the parking rod into the parking pawl of the CVT sub-assembly as follows:

**IMPORTANT:** Perform step 23 while the sub-assembly has a **40 mm gap (1.6 inch)** to the CVT case (Figure 28E).

- a. Rotate the shift select lever clockwise on the side of the CVT to adjust the park rod to the highest position.
- b. Use a magnet, or similar tool, to align the park rod in the CVT case (  in Figure 27E) with the opening in the parking pawl (  in Figure 26E) in the side cover.

**NOTE:**

- If the parking rod is not located correctly it may keep the case from lowering.
- If the parking rod is not located correctly, the shift select lever will not rotate through all detents (P-R-N-D-L) once the sub-assembly is completely installed.

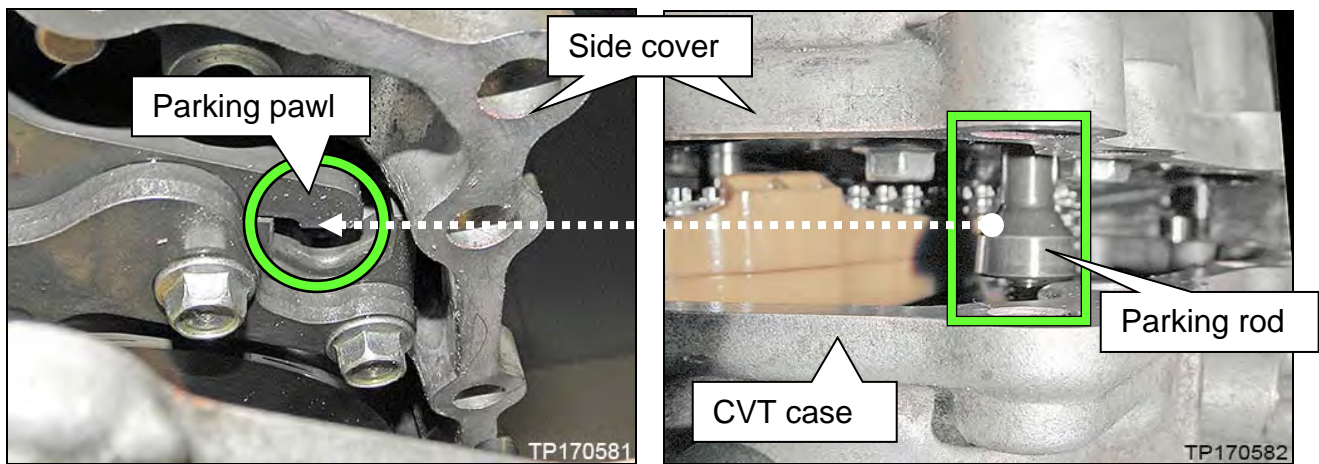


Figure 26E

Figure 27E

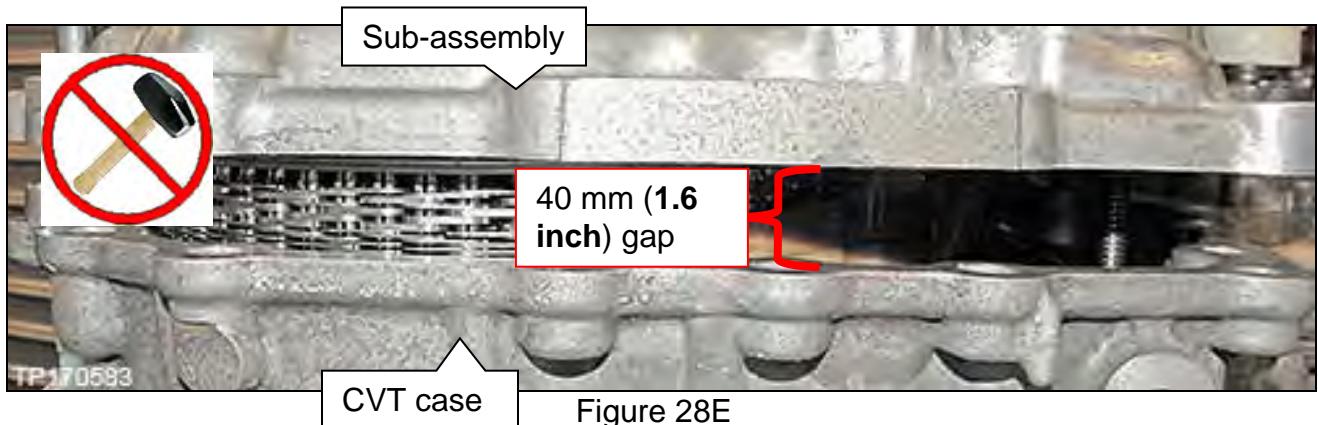


Figure 28E

24. Continue to slowly lower the sub-assembly into the CVT case.

- If the primary and the secondary pulley bearings do not align properly with their bores (Figure 29E) or are at an angle, a **gap of 18 mm (0.7 inch)** may be present.
- Possible areas of interference are highlighted with orange and tan in Figure 29E.
  - As needed, level the sub-assembly as it is lowered into the CVT case to help the primary and the secondary pulley bearings align in their bores.
  - MINOR LEVELING ADJUSTMENTS with limited weight on the sub-assembly will help the installation. **Vertical force is not needed.**
  - Once the sub-assembly is LEVEL the primary and the secondary pulley bearings will smoothly align while lowering.

#### Sub-assembly will not lower past 18 mm (0.7 inch)?

- If this occurs Do NOT force sub-assembly into case.
  - a. Raise the sub-assembly slightly.
  - b. Level the sub-assembly (visually check the gap between case and sub-assembly side cover and confirm that it is even all around).
  - c. Gently lower the sub-assembly.
  - d. Gently shake the sub-assembly horizontally, lower, raise and repeat as needed to help align.
  - e. Lower to clear dowel pins to 6 mm (0.25 inch).

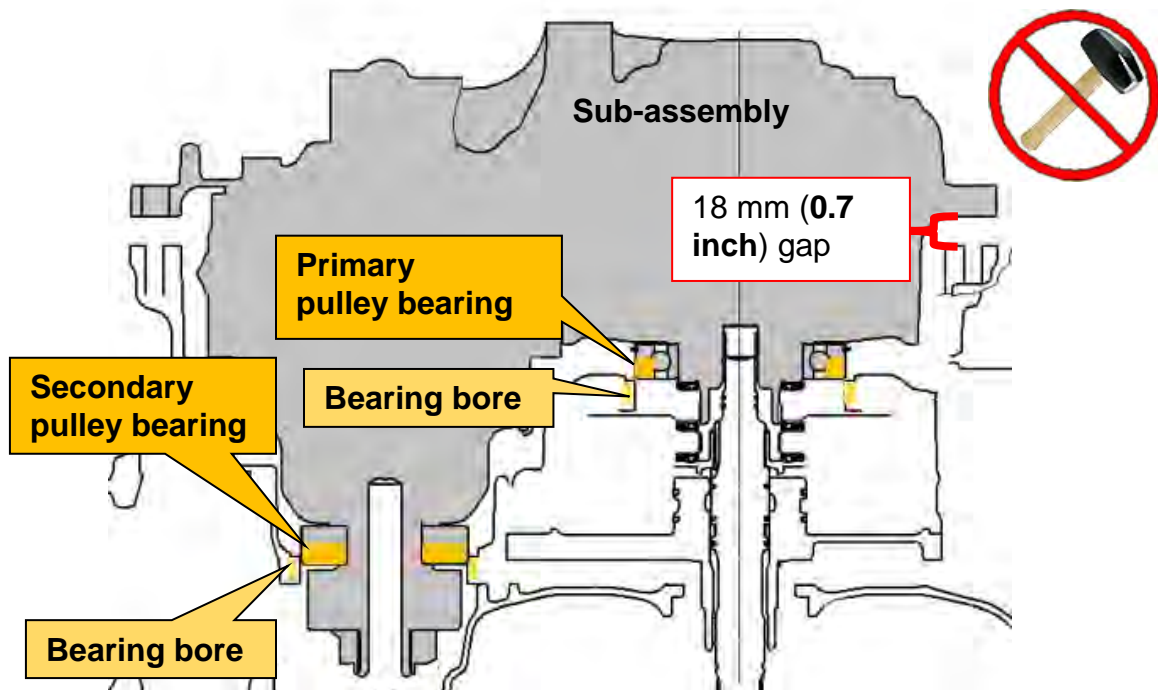


Figure 29E

**IMPORTANT:** In the following steps the case halves must sit flush against each other without a gap before installing the bolts. The bolts CANNOT be used to draw the cases together. DO NOT APPLY VERTICAL FORCE.

25. Once the dowel pins are cleared, ease the sub-assembly down onto the CVT case until the case halves are flush.

- Confirm the dowel pins are clean and aligned and are not catching on the sub-assembly case cover.

**WARNING:** Be careful not to get fingers caught between the CVT case and sub-assembly when seating.

### Sub-assembly will not lower past 5 mm (0.2 inch)?

If the sub-assembly will not lower past **5 mm (0.2 inch)**, the primary pulley splines are interfering with the planetary carrier splines.

- If this occurs Do NOT force sub-assembly into case.
  - a. Raise the sub-assembly slightly to separate physical spline interference.
  - b. Slightly rotate the primary pulley back and forth slowly, through the bottom of the CVT, and then lower the sub-assembly.
  - c. Repeat as needed.

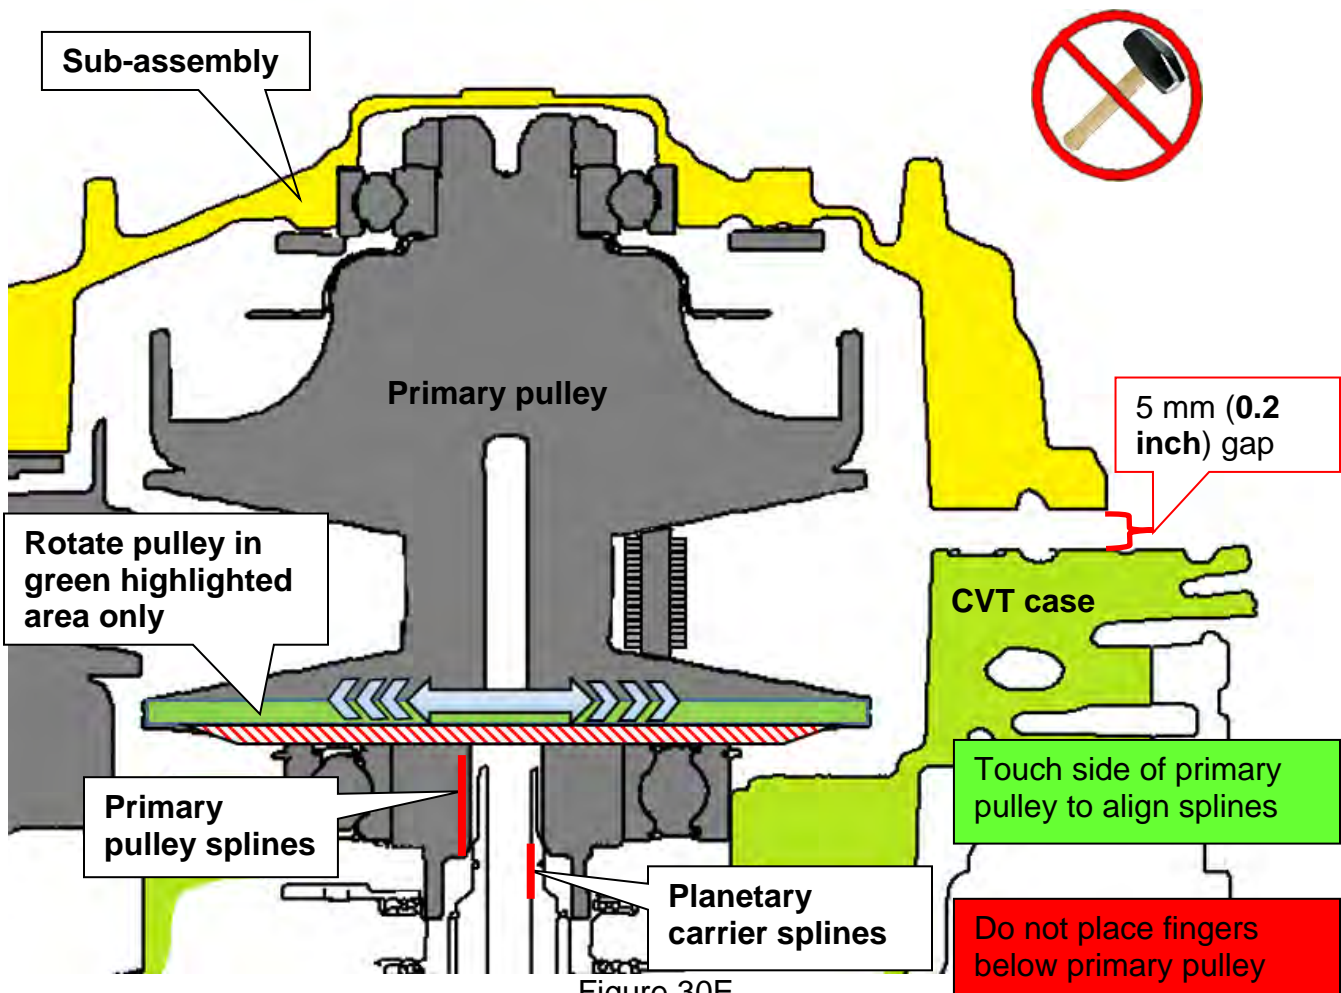


Figure 30E

26. Rotate the select lever to "N" range.
- This helps keep the sub-assembly level.

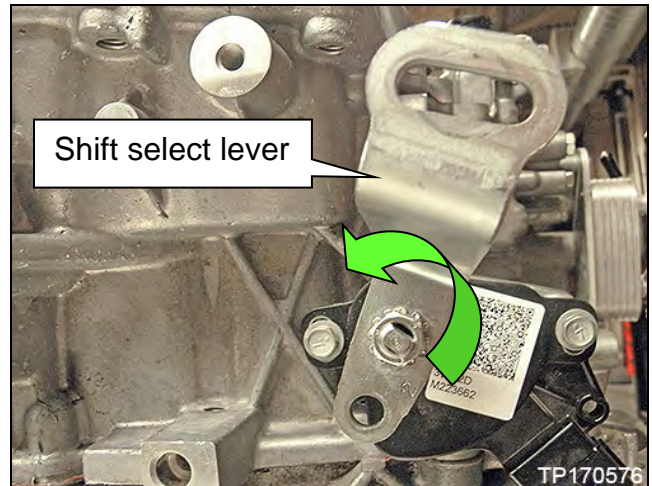


Figure 31E

27. Remove the Lifting Fixture from the side cover.
- Loosen the wing nuts
  - Unthread the tool from the pulley brackets.

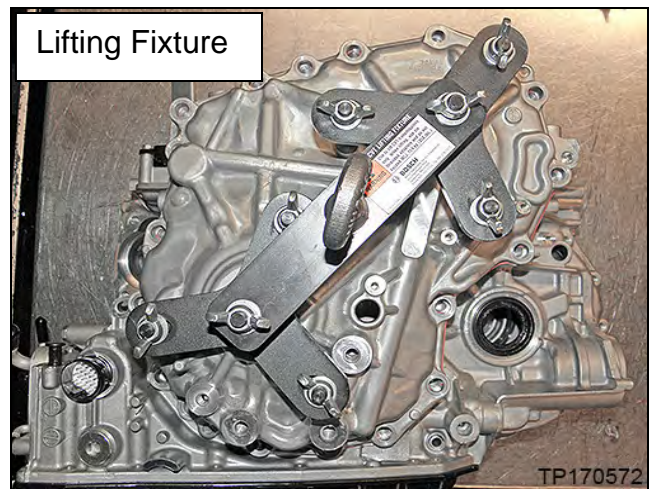



Figure 32E

## Remove Side Cover and Install Lubrication Caps

**IMPORTANT:** In the following steps, use only slide hammer and hands to separate side cover.

In the following steps, if the side cover does not easily lift off by hand **STOP** ! it is still seated on the pulley bearings and must first be completely separated.

Do NOT use tool J-52275 at this time.

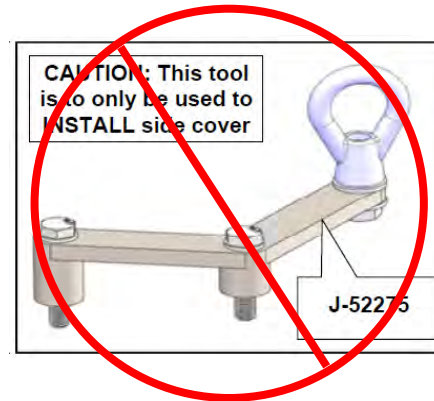

1. Install two Pulley Bracket Guide Pins (J-52272).

- The bracket guide pins will be used as a height marker of the pulleys to ensure they remain seated in the case as the side cover is removed.

2. Use slide hammer (J-25721-A) with J-hook case separator (J-51923) and evenly separate the side cover from the belt and pulley assembly.

- Alternate between the three hooking locations on the side cover until the side cover separates from pulleys (see page 37 Figure 11E).
  - As the side cover is raised up, the exposed height of the pulley guide pins will shorten. This is an indicator that the pulleys are remaining seated in the CVT case.
  - Make sure the side cover is completely separated from the pulley bearings.
  - Once side cover is separated from pulley bearings, it will rock freely and can be easily lifted by hand.

**IMPORTANT:** Use only slide hammer and hands to separate side cover from pulleys.

3. Lift off the side cover by hand.

**NOTE:** The side cover weighs 9 lbs.

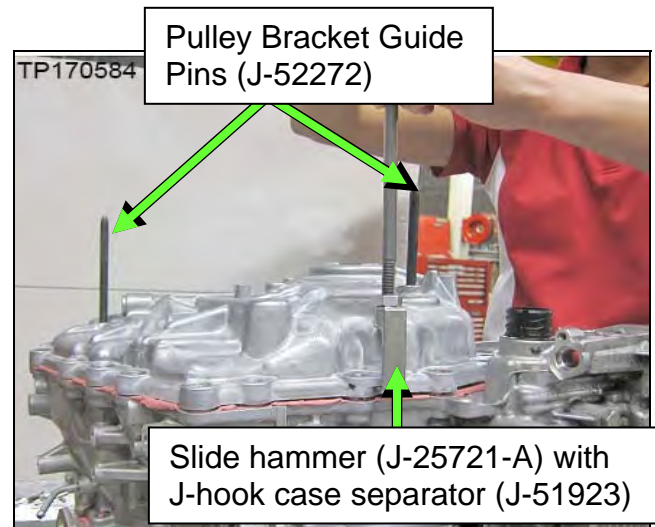


Figure 1F



Figure 2F



4. Install two (2) new lubrication caps (see Parts Information) shown in Figure 3F onto the tubes of the CVT case shown in Figure 4F as follows:
  - a. Insert the lubrication caps through the slots in each chain guide.
  - b. Face the larger side of the “wedge shaped index guide” away from the pulleys.
  - c. Gently push each lubrication cap down into the square cut seat of the CVT case tubes.

**NOTE:** Slightly rotating the lubrication caps will help in aligning them into the square cut seats.

**IMPORTANT:** Confirm that caps are installed in the correct orientation.

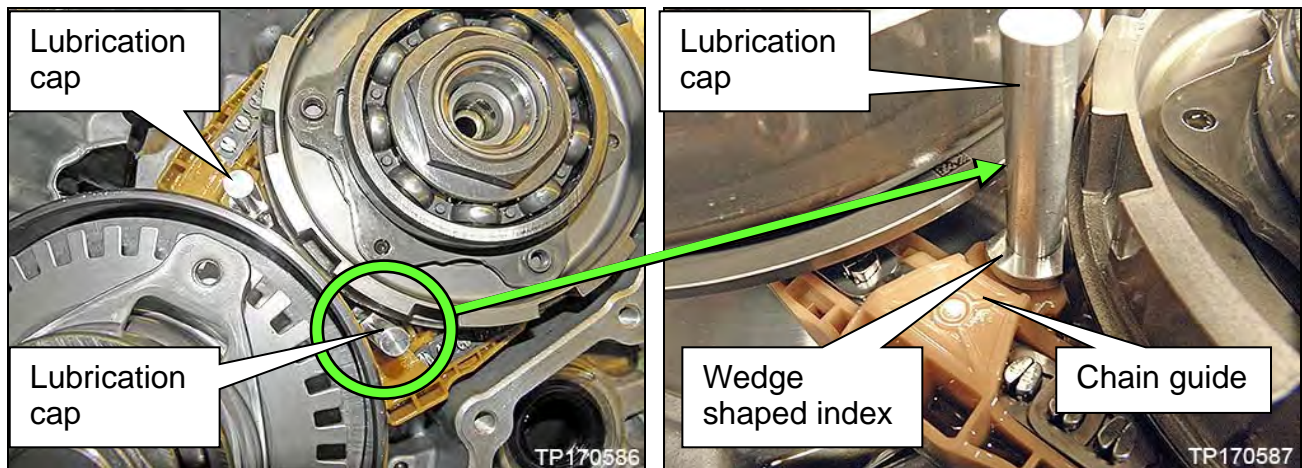


Figure 3F

This Figure is shown with the pulleys and chain removed to illustrate how the lubrication caps attach to the CVT case tubes and is for reference only.

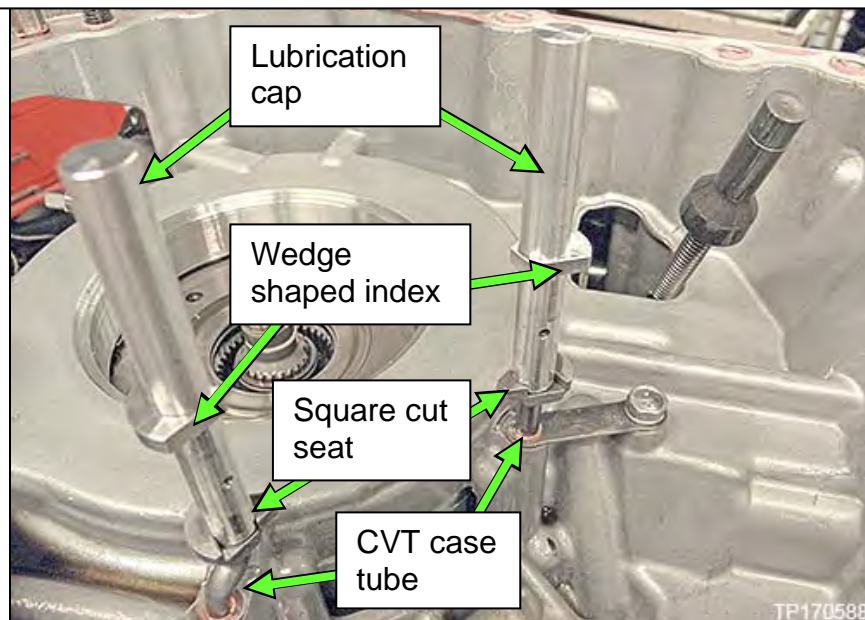


Figure 4F

5. Confirm two Pulley Bracket Guide Pins (J-52272) are in place.
  - One guide pin to each pulley bracket.
  - Can be installed into any of the three bolt holes.

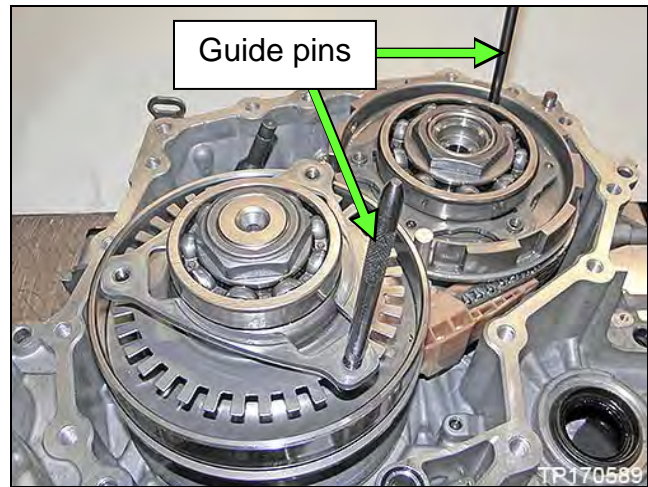


Figure 5F

6. Rotate each bracket to align with holes in the case as shown in Figure 6F.

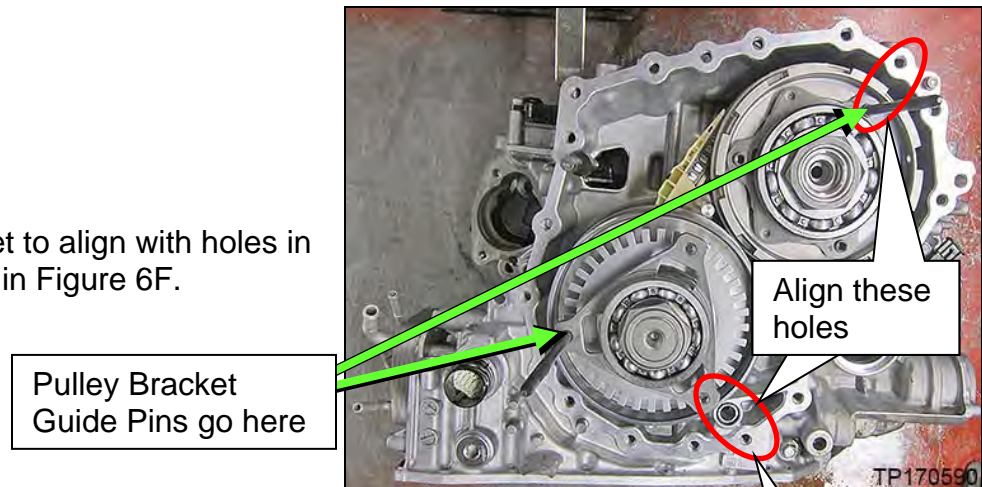


Figure 6F

7. Install a new O-ring.
  - Apply CVT fluid to the O-ring before installation.
  - Press down completely into machined groove.

**NOTE:** Do not re-use the old O-ring.

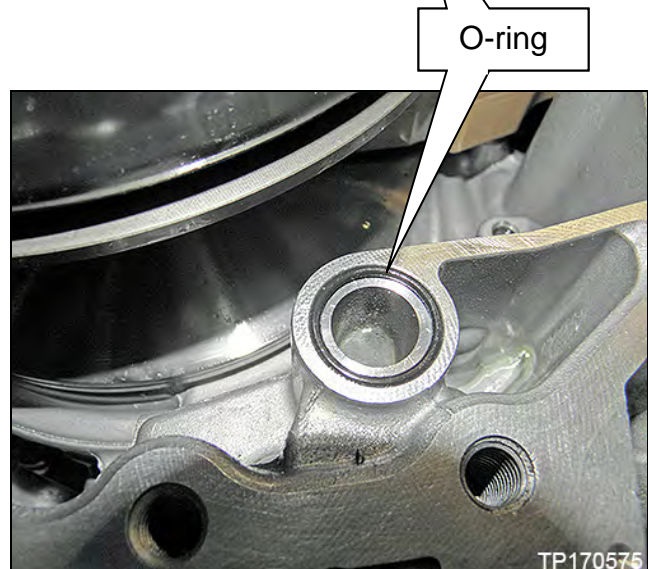


Figure 7F

8. Confirm that the shim and the lathe cut seal, on the underside of the side cover, stay in place.
  - The shim is located in the secondary pulley bearing bore.
  - Lathe cut seal is located in the center of the same bearing bore.

**NOTE:** Apply petroleum jelly or equivalent as needed to keep the shim and lathe cut seal in place while lowering the side cover to the CVT.

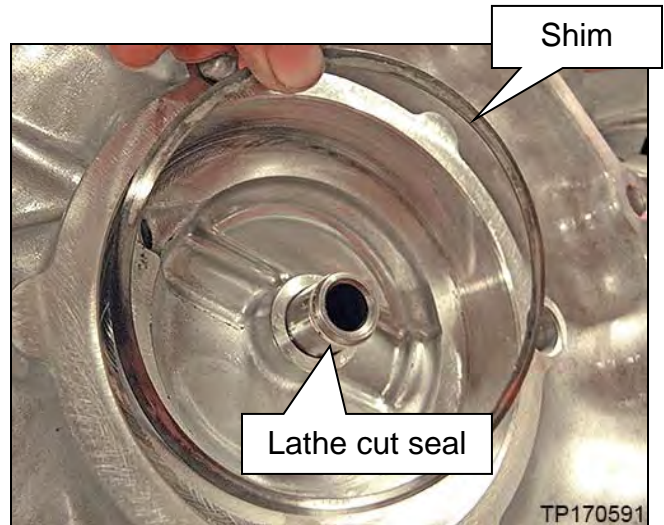


Figure 8F

### Install Side Cover

1. Install the Side Cover Alignment Aid (#J-52275), with two (2) bolts hand tight.

**NOTE:** The Alignment Aid will assist with level installation and help keep integrity of sealant until the case halves are flush against one another.

2. Lift side cover with suitable lifting tool and confirm that the underside case mating surface is clean.

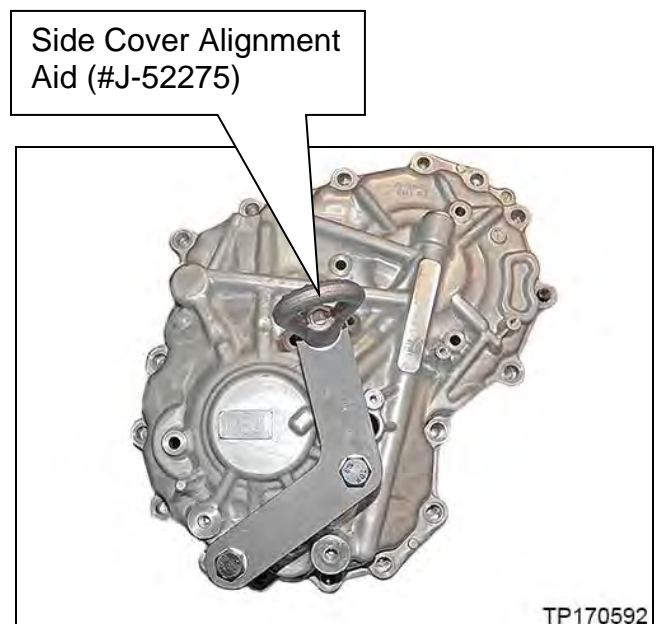


Figure 9F

3. Apply one continuous 2.0 mm diameter bead of sealant along the center of the CVT case side mating surface (Figure 10F).

**Sealant:**

- Loctite 5460 (See the Parts Information section of this bulletin.)
- Color: Pink

**IMPORTANT:**

- Confirm that the mating surfaces are clean before applying sealant.
- Make sure that the starting point and the ending point of the sealant is between two bolt holes. Overlap both ends of the bead by 3 – 5 mm.
- If the Guide Pins were removed to clean the case surfaces, reinstall them now.

**CAUTION:** Be careful not to contact or contaminate the sealant. If the sealant has been disturbed or contaminated in any way before case assembly, remove the sealant completely and re-apply.

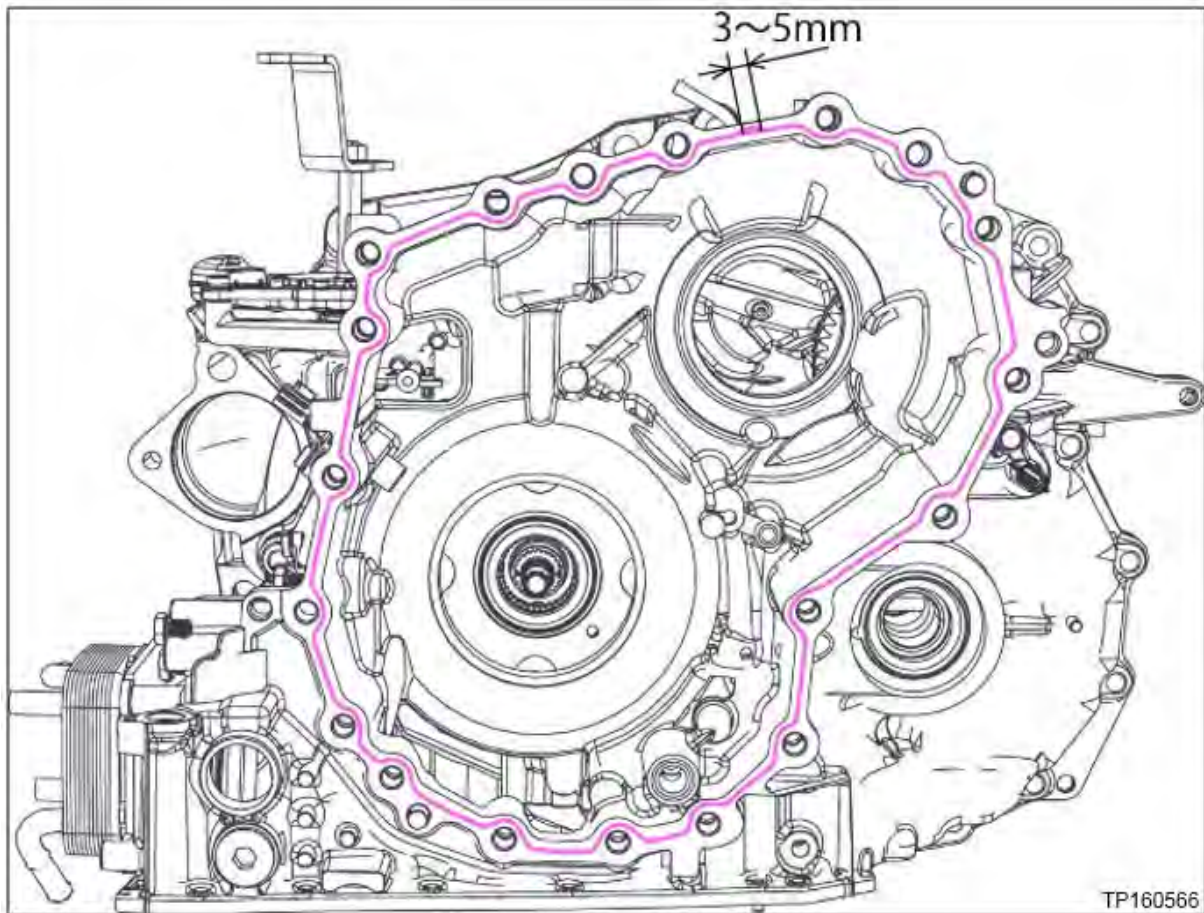


Figure 10F

4. Rotate the manual lever clockwise to the "P" range to set the parking rod at the highest position.

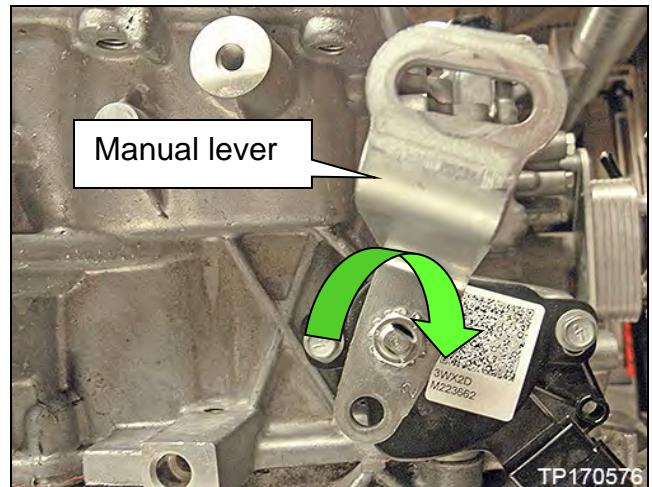


Figure 11F

5. Install the CVT Assembly Guide Pins (#J-51959).

**IN THE FOLLOWING STEPS IF THE SIDECOVER DOES NOT LOWER COMPLETELY, STOP ! PHYSICAL INTERFERENCE IS PRESENT.**

**NOTE:** Before installing side cover read steps 6-9.

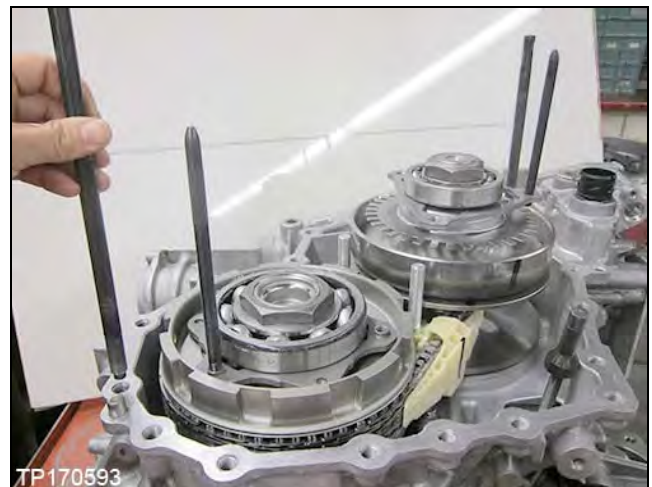


Figure 12F

6. Install the side cover to the CVT case.
  - a. Route each of the 4 guide pins from under the side cover through their respective bolt holes.
  - b. Lower the side cover until the parking rod can be aligned with parking pawl and then proceed to step 7 on the next page.
    - See Figure 14F on page 54.

**IMPORTANT:**



- Keep the side cover as level as possible during installation.
- To assist with proper pulley positioning, confirm the CVT is on a flat surface.
- Do not use excessive vertical force to install.



Figure 13F



7. Install the parking rod into the parking pawl of the CVT side cover as follows:

**IMPORTANT:** Perform step 7 while the side cover has a **38 mm gap (1.5 inch)** to the CVT case (Figure 16F).

- a. Rotate the shift select lever clockwise on the side of the CVT to adjust the park rod to the highest position.
- b. Use a magnet, or similar tool, to align the park rod in the CVT case (  in Figure 15F) with the opening in the parking pawl (  in Figure 14F) in the side cover.

**NOTE:**

- If the parking rod is not located correctly it may keep the side cover from lowering.
- If the parking rod is not located correctly, the shift select lever will not rotate through all detents (P-R-N-D-L) once the side cover is completely installed.

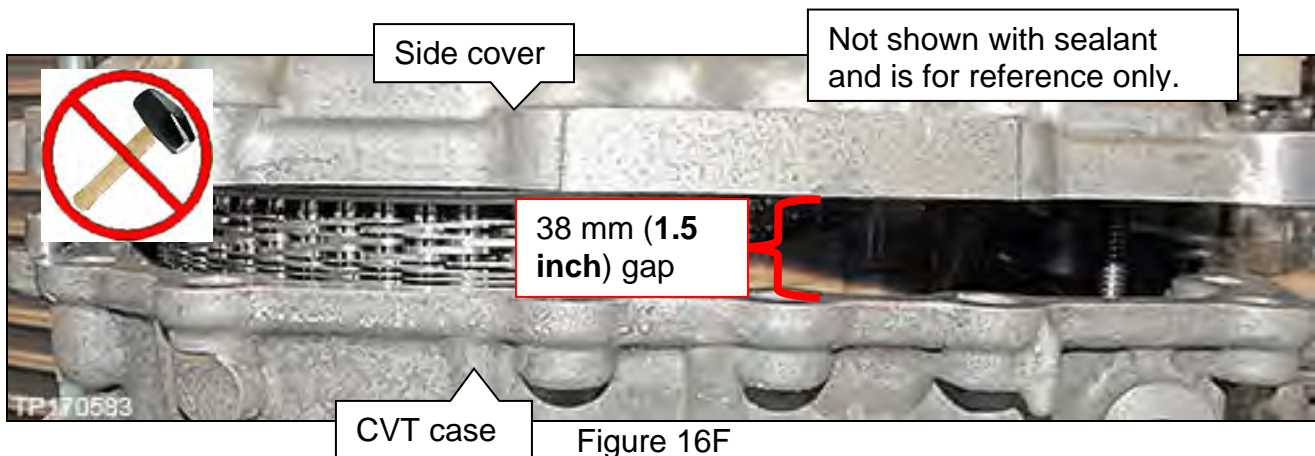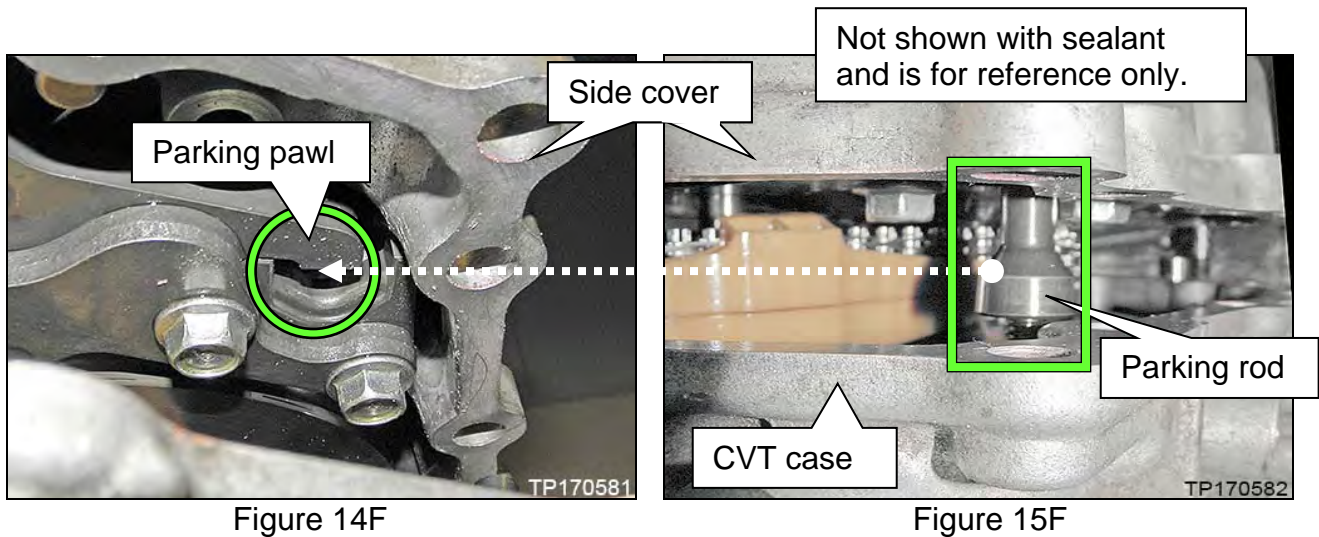

- By hand, press down on the side cover over each of the pulley bearings to level and seat the side cover.

**IMPORTANT:** The side cover will not be fully seated at this step.

Apply pressure to these locations

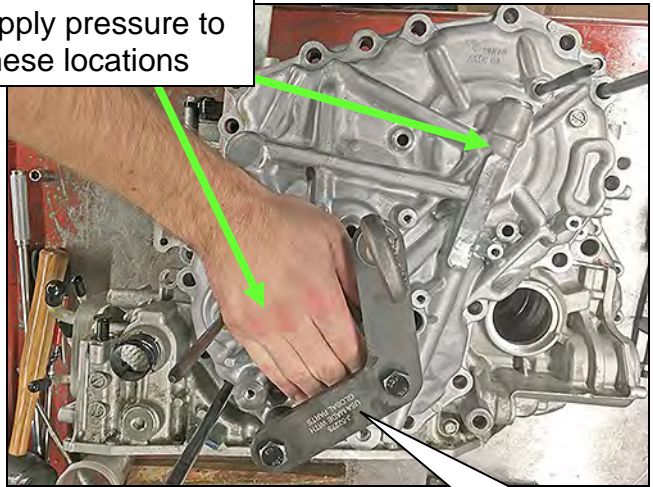


Figure 17F

Side Cover Alignment Aid (# J-52275)

- Rotate the manual lever to the “N” position.

- Remove the Side Cover Alignment Aid (# J-52275) shown in Figure 17F.

**NOTE:** Figure 18F shown with Side Cover Alignment Aid removed.

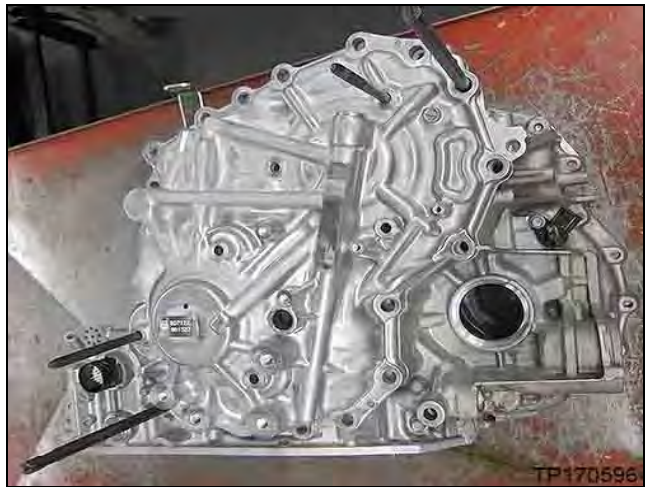


Figure 18F

- Continue to lower the side cover until it is flush with the CVT case.

- Use a plastic hammer or rubber mallet, if the side cover is caught, and gently tap evenly around the top of the side cover to help seat.

**IMPORTANT:**

- Side cover must be completely seated.
- Bolts cannot be used to draw case halves together.
- Do NOT use metal hammers or mallets.
- If it is necessary to unseat the side cover assembly, use a slide hammer and then restart from step 1 on page 51.
- Do NOT pry with a screw driver.

12. Remove the two (2) CVT Assembly Guide Pins (# J-51959).

- Leave the Pulley Bracket Guide Pins in place.

13. Install the sub-assembly side cover with nineteen (19) new side cover bolts to the CVT case (Figure 19F).

**CAUTION:** Do not reuse original side cover bolts.

- Torque the first eight (8) bolts marked as ● in the sequence numbered in Figure 19F below, and then torque the rest of the bolts in a clockwise manner.
  - Bolt torque: 45 N•m (4.6 kg-m, **33 ft-lb**) 19 pieces.

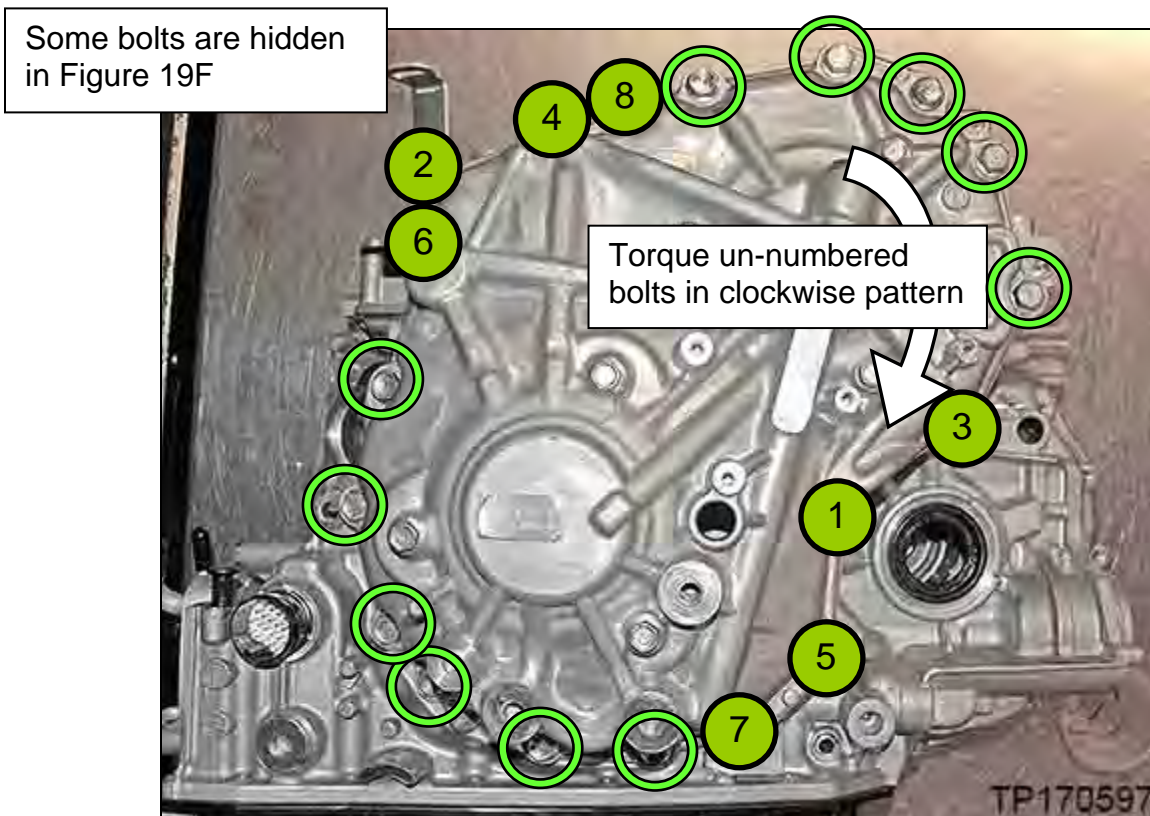


Figure 19F

14. Install six (6) new O-rings from Parts Information to the six (6) new pulley bearing retainer bolts that were removed from the new sub-assembly on page 39, step 17.



15. Install the new pulley bearing retainer bolts to secure the pulleys and side cover.
- Install four (4) bolts first, hand tight.
  - Remove two (2) guide pins from the pulley bracket.
  - Install the last two (2) bolts with O-rings, hand tight.

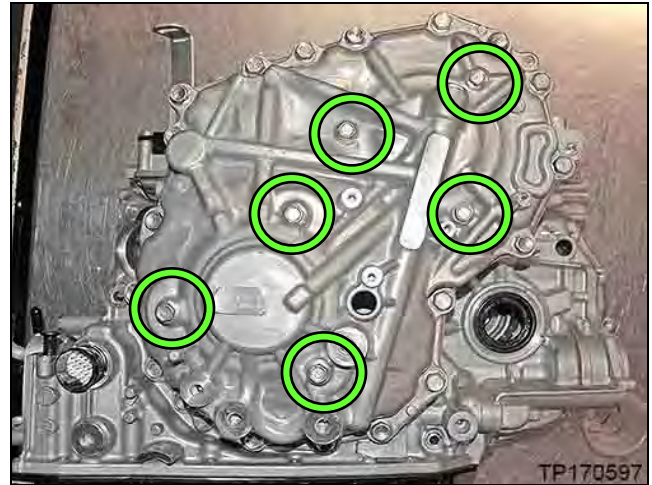


Figure 20F

16. Confirm the parking rod operates correctly as follows:
- Rotate the shift select lever counter-clockwise and confirm that all detents for each of the P-R-N-D-L are felt.
  - Rotate the lever clockwise to return the rod back to the **P** position.
  - Are all of the detents felt?
    - **YES:** Proceed to step 17.
    - **NO:** If the lever does not rotate or if all detents are not felt:
      - Remove the sub-assembly side cover and then remove sealant.
      - Restart from step 1 on page 51.

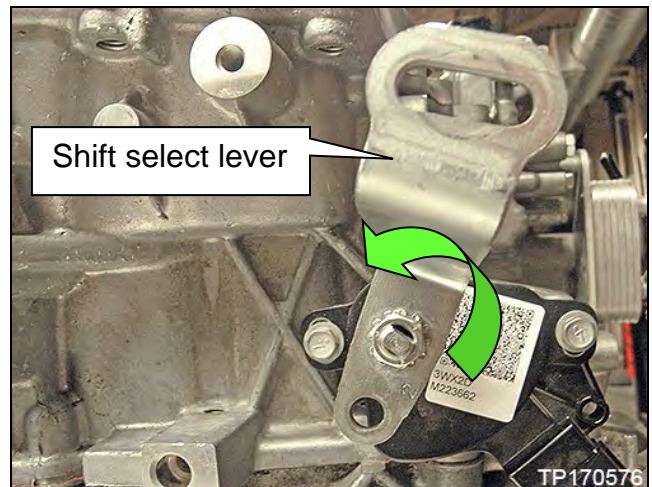


Figure 21F

17. Confirm the rotational smoothness of the primary pulley as follows:

- a. With clean hand, access the primary pulley from the bottom of the CVT to rotate.
- b. Rotate the primary pulley by hand and confirm that the characteristic is the same as previously checked at step 4 (page 34), prior to removing the original sub-assembly.
- c. Is the rotational characteristic “the same” (**OK**) or “worse than before the sub-assembly was replaced” (**NG**)?

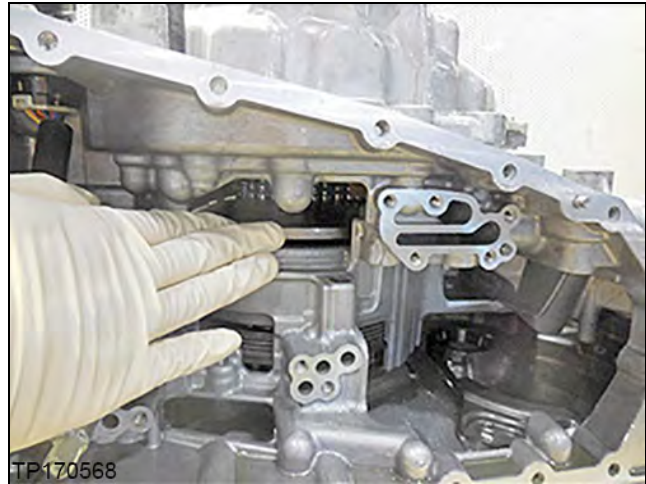


Figure 22F

- **OK:** The rotational characteristic is the same or better; proceed to step 18.
- **NG:**
  - 1) Remove the 19 case bolts and 6 pulley bracket bolts. Refer to page 35 steps 5 and 6.
  - 2) Install the two Pulley Bracket Guide Pins (J-52272). Refer to page 48 steps 1.
  - 3) Remove the side cover.
  - 4) Remove the two (2) lubricating caps.
  - 5) Remove the silicone from the sealing surfaces.
  - 6) Reinstall the side cover and then remove the Pulley Bracket Guide Pins.
  - 7) Restart sub-assembly installation from Step 7 on Page 36.
  - 8) Follow procedure through to page 58 step 17 and check rotational characteristics.

18. Torque all six (6) bolts.

- Bolt torque: 28 N•m (2.8 kg-m, **20 ft-lbs**).



Figure 23F

19. Install the CVT case side axle seal (Figure 24F).

- Use Seal Installer J-52283 and Driver Handle J-8092.
- Apply a light coat of CVT fluid to the seal lip surfaces.

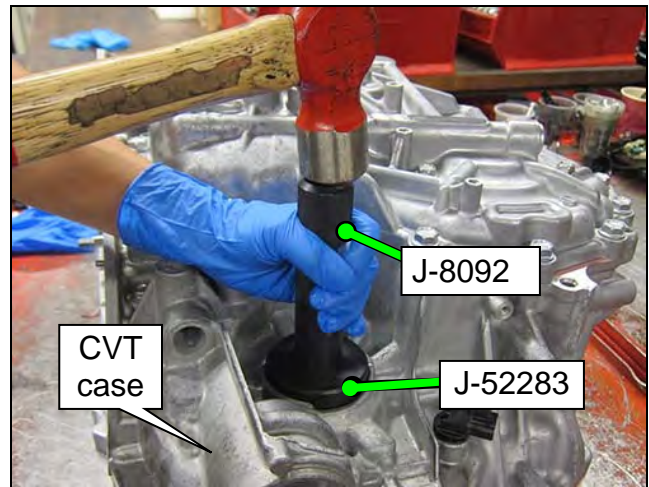


Figure 24F

20. Place the CVT on the work bench with the side cover facing down on the bench.

21. Remove the converter housing which was temporarily installed with three bolts.

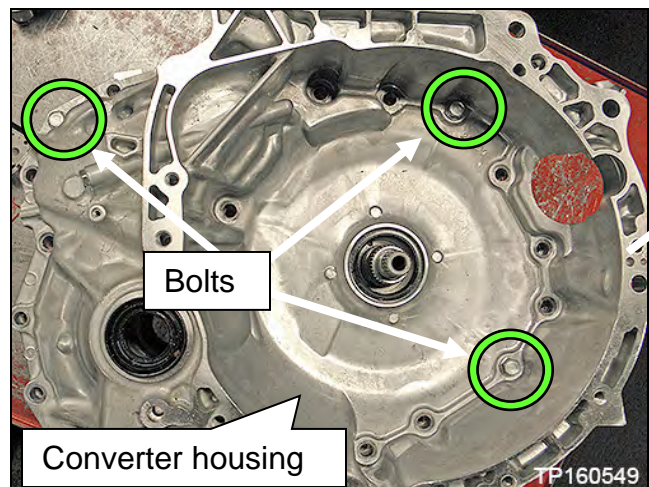


Figure 25F

22. Unbolt the three (3) bolts holding the dummy cover and then remove the dummy cover.

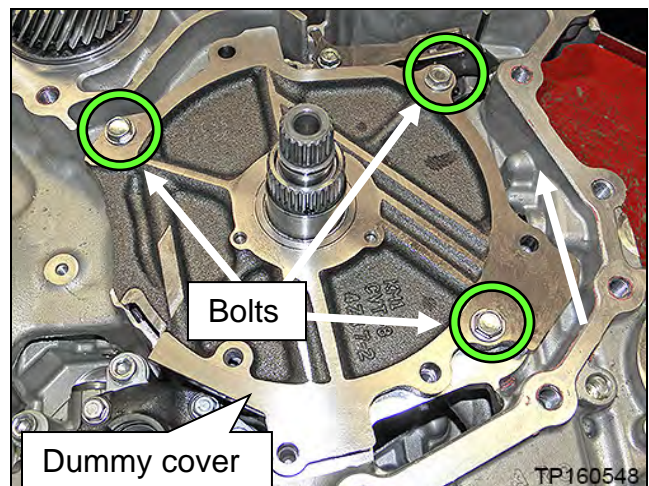


Figure 26F

## Digital Gauge “Zero” Procedure

The Depth Gauge needs to be set to “zero” before performing measurements in the following service procedure.

**IMPORTANT:** This procedure **MUST** be performed before proceeding.

Measurement tools:

- Gauge Block (straight bar)
- Depth Gauge (Digital Vernier scale) with a datum level (accuracy: 0.01 mm)

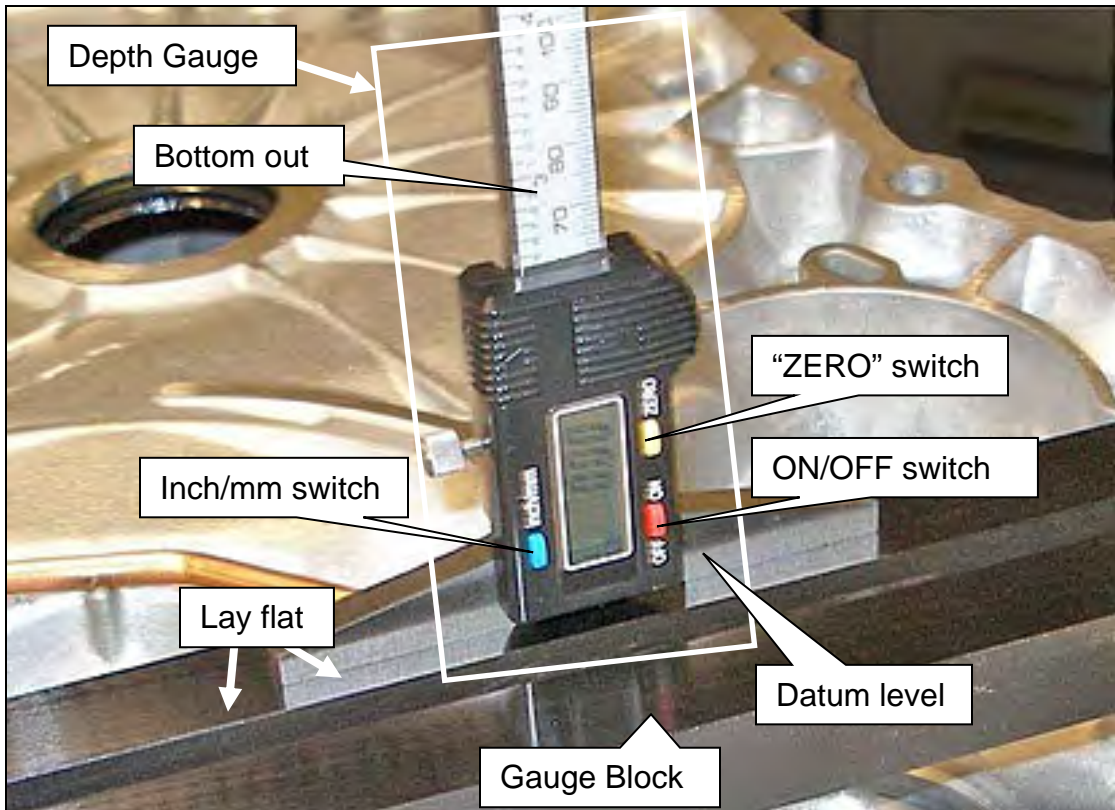


Figure F

## Depth Gauge Calibration

To calibrate the Digital Depth Gauge J-50272:

- Turn the Depth Gauge ON and set it to “mm” measurement.
- Place the Depth Gauge’s datum level flush on top of the Gauge Block.
- Carefully slide the depth marker down until it bottoms out on the Gauge Block.
- With the depth marker bottomed out, press the “ZERO” switch.
  - The Depth Gauge’s display should now read 0.00 mm.

### NOTE:

- Push (extend) the depth marker to the gauge block to correctly zero.
- Do not use the gauge block to push (retract) the depth marker up to the datum point.

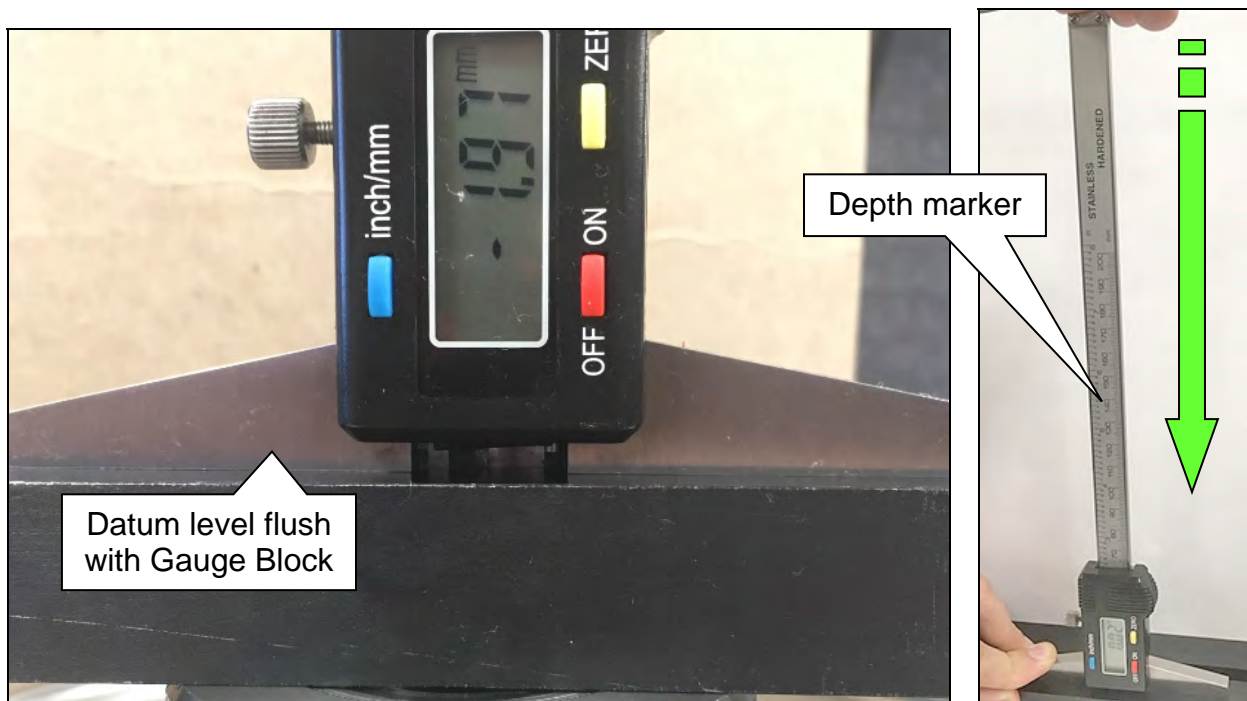


Figure G

**Pages 62-66 are for Type 1 Thrust Bearing ONLY. Proceed to page 67 if working with Type 2 Thrust Bearing (with bearing race).**

### **Type 1 CVT: Clutch Total Endplay Adjustment – Thrust Bearing Selection**

**IMPORTANT:** The clutch total endplay (Figure 1G) must always be adjusted when a new sub-assembly is installed.

- The Type 1 CVT uses the thrust bearing thickness between the clutch drum of clutch assembly and the dummy cover to adjust the total endplay.

### **Thrust Bearing Selection**

There are eight (8) thicknesses of thrust bearing available for total endplay adjustment.

- For additional information, see video # 547: “CVT Belt and Pulley Replacement” and fast forward to minute marker 13:10. This video is located under the TECH TRAINING GARAGE VIDEOS tab in Virtual Academy.


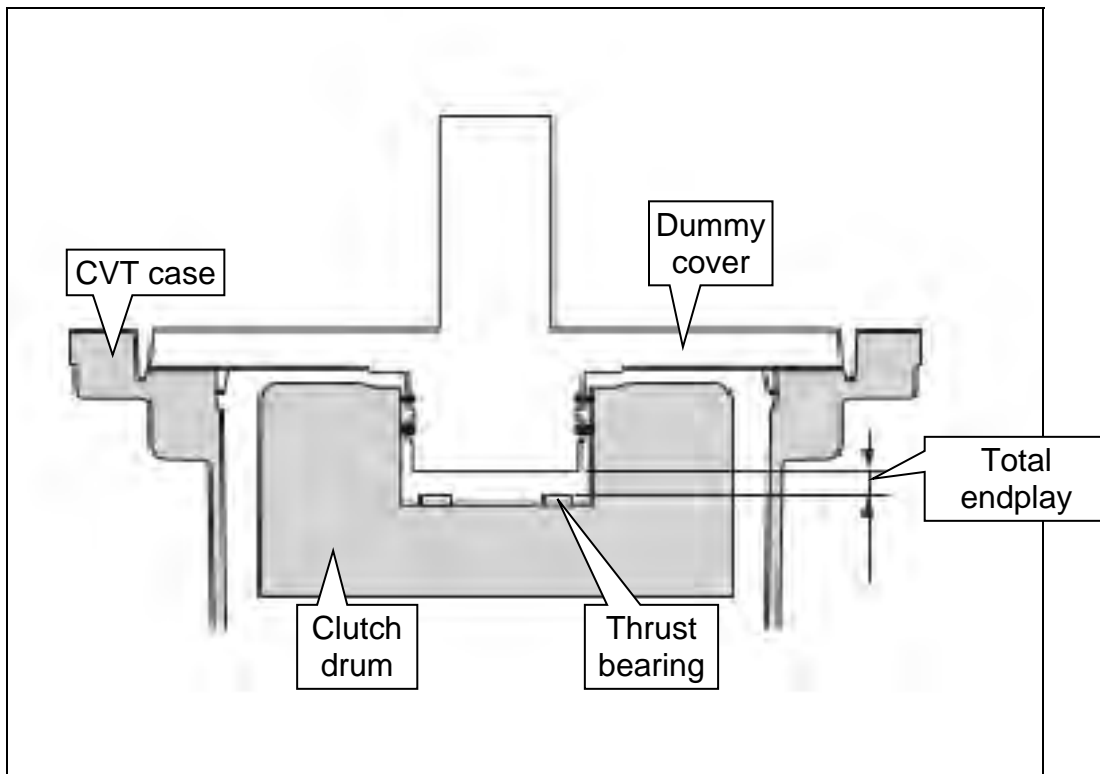


Figure 1G

1. Clean and then zero the Digital Depth Gauge (part #: J-50272). See pages 60-61.
  - Set Digital Depth Gauge to millimeters.
2. Clean Gauge Block J-50271.
3. Confirm that the CVT case and the dummy cover mating surfaces are clean.


4. Calculate the “average clutch assembly bore depth” (**D**) shown in Figure 2G as follows:

**IMPORTANT:** Measurements are required from two opposite ends to obtain the average.

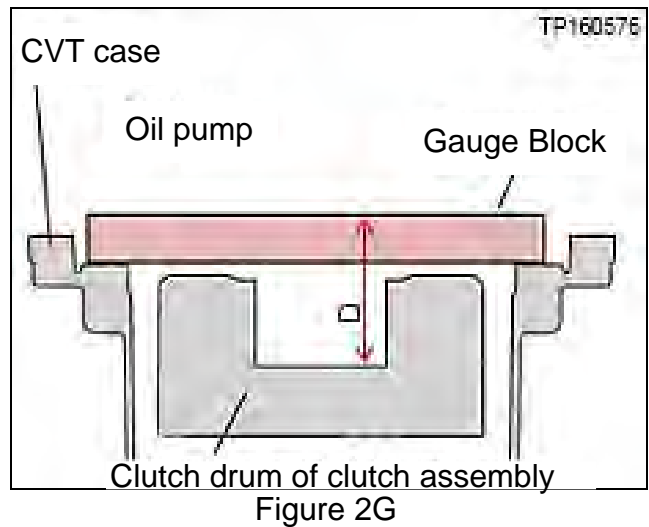

- a. Position the Gauge Block over the clutch assembly bore on the surface where the dummy cover seats (Figure 3G).


**IMPORTANT:** This surface is lower than the CVT case to torque converter housing surface.

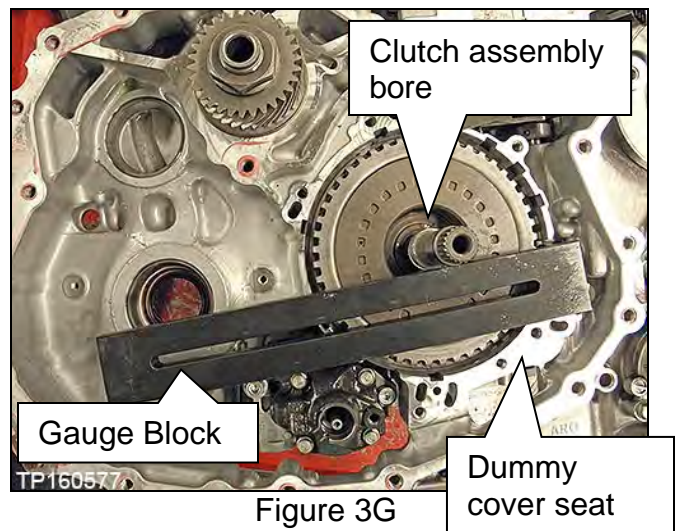

- b. Confirm the Gauge Block is not sitting on the clutch assembly or against the input shaft.

**NOTE:**

- The clutch assembly should sit 1-3 mm lower than the dummy cover seat (Figure 4G).
- If the clutch assembly is sitting higher than the dummy cover surface, see trouble shooting **The Dummy Cover Will Not Sit Flush** on page 98.

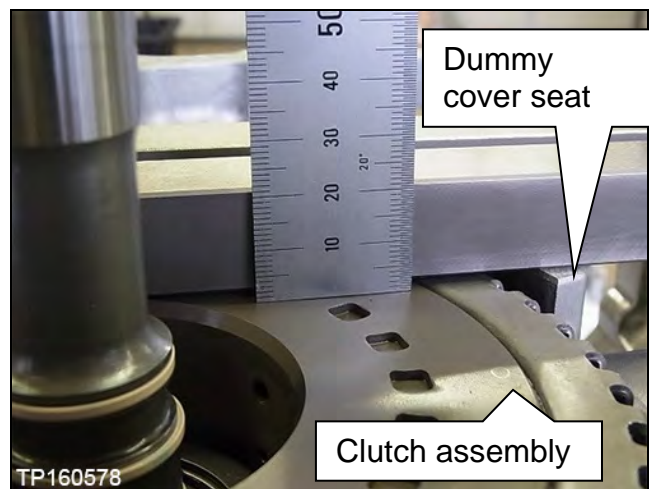

- c. Position the Depth Gauge on the Gauge Block (Figure 5G).

**NOTE:** Make sure the Depth Gauge's datum level is flush with the top of the Gauge Block.

- d. Carefully slide the gauge down until it bottoms out on the bottom of the clutch assembly bore. Write this measurement as **D1** (use millimeters).

**NOTE:** Do not measure from the clutch assembly bore shown in red (Figure 6G).

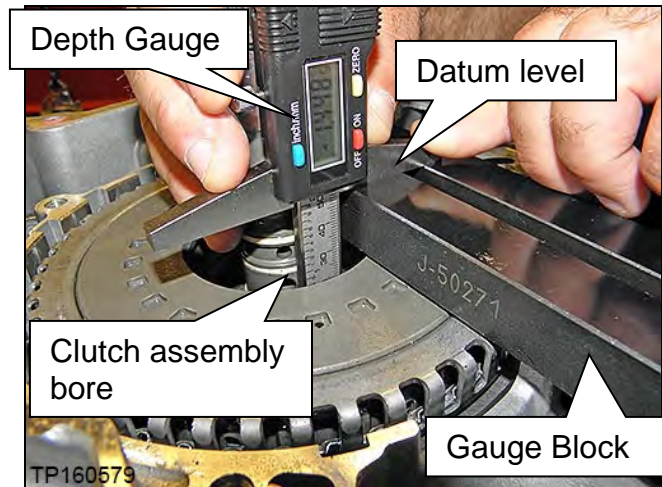


Figure 5G

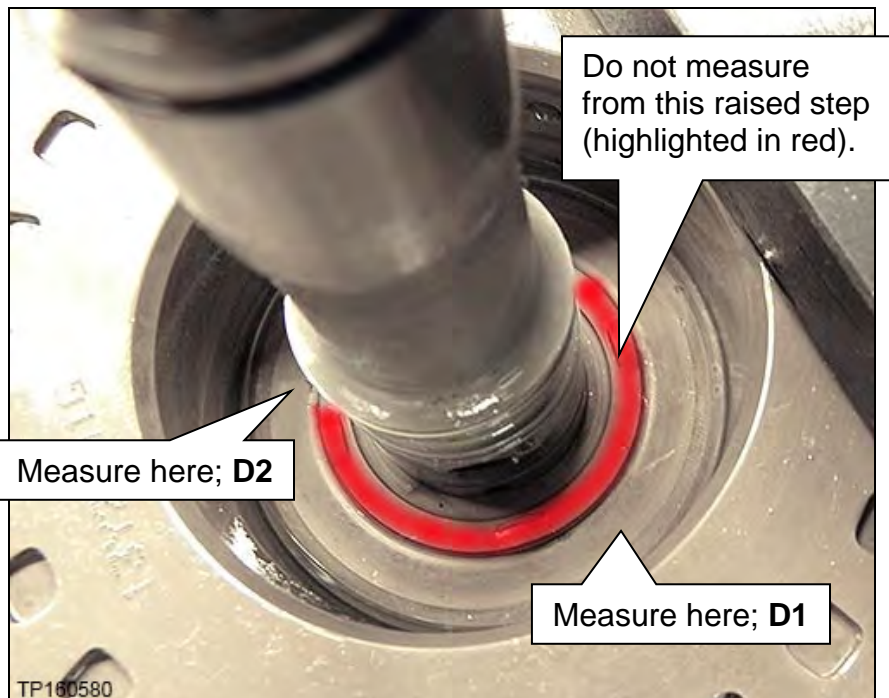


Figure 6G

- e. Measure this same distance on the opposite side (180 degrees) of the clutch assembly bore and write it as **D2**.
- f. Using the formula below, calculate the average and write down the calculated value as **D**.

$$D = \frac{(D1 + D2)}{2}$$

Write the measurement for "D" here \_\_\_\_\_ mm



5. Measure the average (**H**) dummy cover height (Figure 8G) as follows:
  - a. Clean the dummy cover surfaces that contact the CVT case and thrust bearing (Figure 7G).

**CAUTION:** Use brake cleaner (or equivalent) and lint-free towel only. Make sure the brake spray or solvents used are compatible with local regulations.

- b. Place the dummy cover upside down on a work bench, and place the Gauge Block onto the thrust bearing surface (Figure 8G).

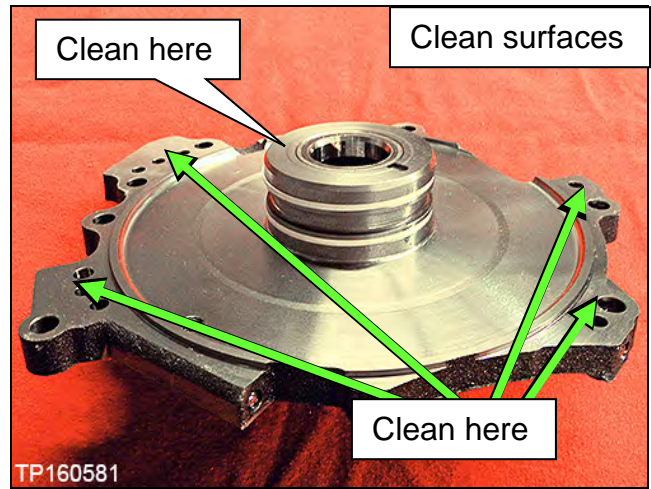


Figure 7G

- c. Position the Depth Gauge on the Gauge Block over an outer end of the dummy cover (Figure 8G).

**NOTE:** Make sure the Depth Gauge's datum level is flush with the top of the Gauge Block.

- d. Carefully slide the Depth Gauge down until it contacts the dummy cover surface that mates with the CVT case. Write this measurement as **H1** (use millimeters).
  - e. Measure this same distance on the opposite side of the dummy cover and write as **H2** (Figure 8G).

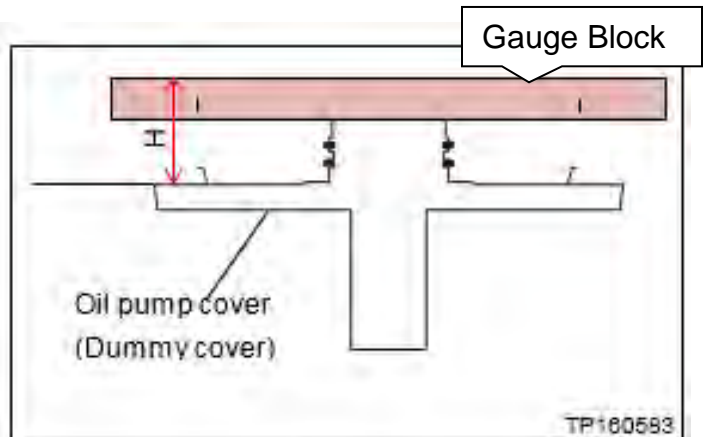
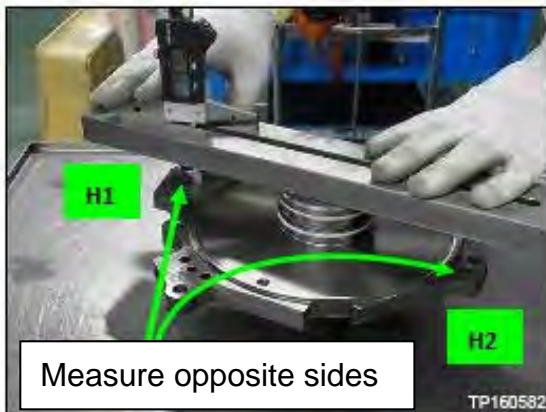


Figure 8G

- f. Using the formula below, calculate the average and then write down the calculated value as **H**.

$$H = \frac{(H1 + H2)}{2}$$

Write the measurement for "H" here \_\_\_\_\_ mm

6. Choose the thrust bearing to adjust Clutch Total Endplay (A) as follows:

- a. Calculate **A** (Total Endplay):

**Total Endplay A = D – H** (This will be the thrust bearing thickness).

- Fill in the measurements below for "D" and "H" from pages 64 and 65 to calculate for "A".

**D** measurement \_\_\_\_\_ mm  
 – **H** measurement \_\_\_\_\_ mm  
 = **A** ..... mm

**Please print this page and attach it to the repair order.**

- b. Choose the appropriate bearing from Table A below, based on **A** (eight different thicknesses of thrust bearings are available).

**Example:** If **A** = 4.3 mm, it falls between the lower and upper clearances for bearing thickness 3.93 mm.

- Refer to **PARTS INFORMATION** for Thrust Bearing part numbers by thickness.

- c. Measure and confirm that the selected thrust bearing is the correct thickness before installing (Figure 9G).

**Table A**

PART #: 31407-	A = D - H CLEARANCE (A)	BEARING THICKNESS
1XZ0B	3.87 - 4.07 MM	3.57
1XZ0C	4.07 - 4.23 mm	3.75
1XZ0D	4.23 - 4.43 mm	3.93
1XZ0E	4.43 - 4.58 mm	4.1
1XZ1A	4.58 - 4.78 mm	4.28
1XZ1B	4.78 - 4.94 mm	4.46
1XZ1C	4.94 - 5.09 mm	4.61
1XZ1D	5.09 - 5.29 mm	4.79



Figure 9G

7. Install the thrust bearing flush to the clutch assembly bore as shown in Figure 10G.

- Install thrust bearing in area shown in green so that it is centered by the four tabs.

**CAUTION:** The thrust bearing has two sides. See image below for appropriate orientation.

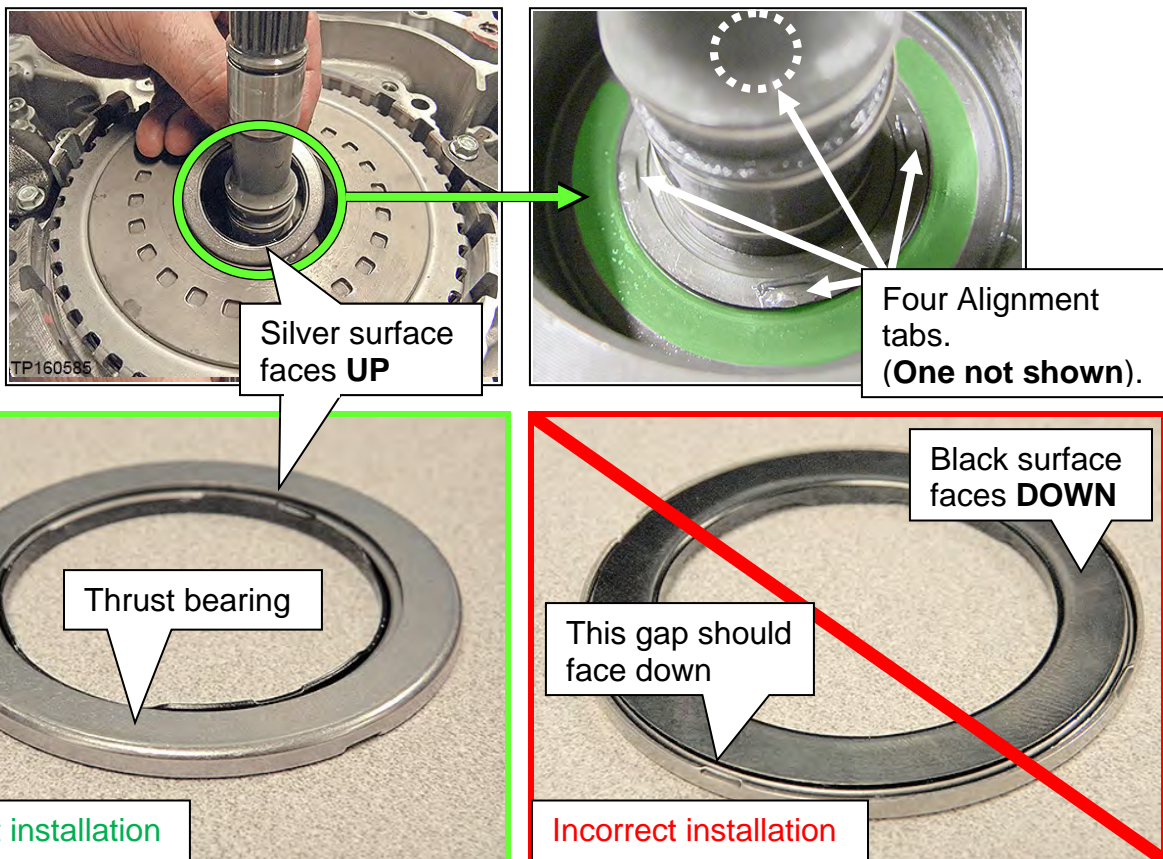


Figure 10G

**Pages 67-74 are for Type 2 Thrust Bearing (with bearing race) ONLY. Proceed to page 62 if working with Type 1 Thrust Bearing.**

## Type 2 CVT: Clutch Total Endplay Adjustment – Bearing Race Selection

**IMPORTANT:** The clutch total endplay (Figure 1GG) must always be adjusted when a new sub-assembly is installed.

- The Type 2 CVT uses the thrust bearing race thickness between the clutch drum of clutch assembly and the oil pump cover (dummy cover) to adjust the total endplay.

### Thrust Bearing Race Selection

There are seven (7) thickness of thrust bearing race available for total endplay adjustment.

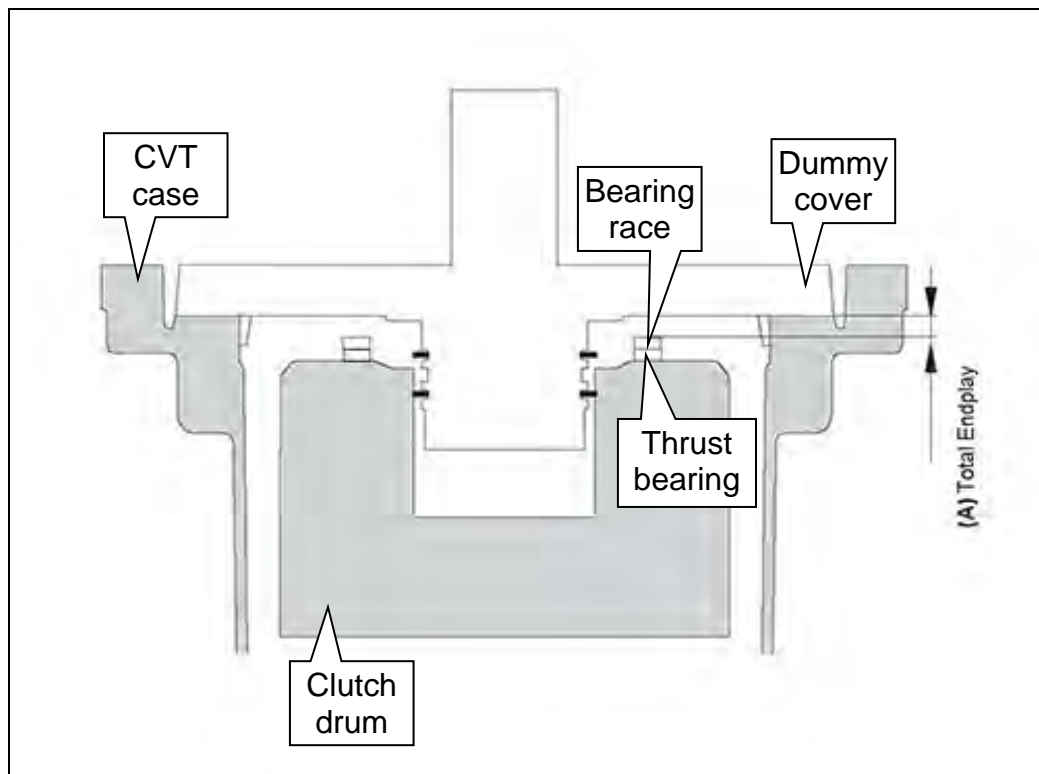


Figure 1GG

1. Clean and then zero the Digital Depth Gauge (part #: J-50272). See pages 60-61.
  - Set Digital Depth Gauge to millimeters.
2. Clean Gauge Block J-50271.
3. Confirm that the CVT case and the dummy cover mating surfaces are clean.

**CAUTION:** Do NOT use sanding discs or similar abrasive tools.

- Use brake spray or equivalent solvent and lint-free towels only.
- Make sure the brake spray or solvents used are compatible with local regulations.

4. Calculate the “average clutch assembly surface depth” (D) as follows:

**IMPORTANT:** Measurements are required from two opposite ends to obtain the average

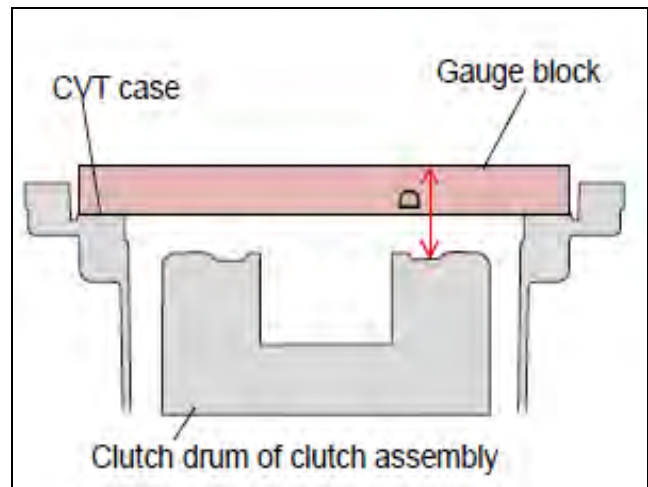


Figure 2GG

- a. Position the Gauge Block over the clutch assembly on the surface that the dummy cover seats.

**IMPORTANT:** This surface is lower than the CVT case to torque converter housing.

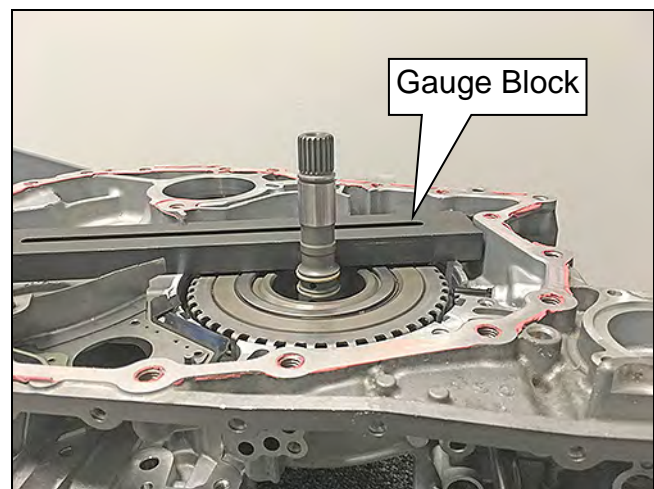


Figure 3GG

- b. Confirm the Gauge Block is not sitting on the clutch assembly or against the input shaft.

**NOTE:**

- The top surface of the clutch assembly must be 1-3 mm below the CVT case surface, where the dummy cover seats.
- If the clutch assembly is sitting higher than the dummy cover surface, see trouble shooting **The Dummy Cover Will Not Sit Flush** on page 98.

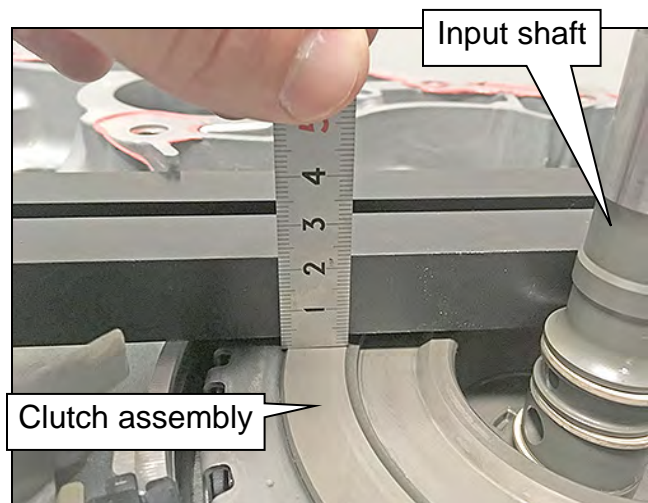


Figure 4GG

- c. Position the Depth Gauge on the Gauge Block.

**NOTE:** Make sure the depth gauge's datum level is flush on top of the Gauge Block.

- d. Carefully slide the gauge down until it bottoms out on the upper surface of the clutch drum where thrust bearing seats, where shown in Figure 5GG. Write this measurement as **D1** (use millimeters).

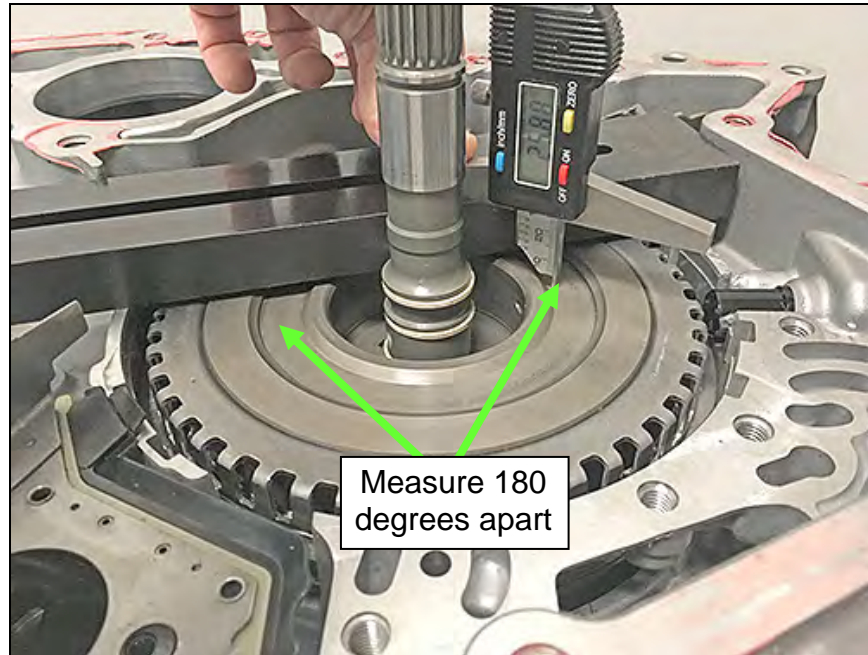


Figure 5GG

- e. Measure this same distance on the opposite side (180 degrees) of the clutch assembly surface and write it as **D2**.

- f. Using the formula below, calculate the average and write down the calculated value as **D**.

$$D = \frac{(D1 + D2)}{2}$$

Write the measurement for "D" here \_\_\_\_\_ mm

5. Measure the average (**H**) dummy cover height where case seats as follows;

- a. Clean the dummy cover surface that contact the CVT case and depth gauge.

**CAUTION:** Use brake spray (or equivalent) and lint-free towel only. Make sure the brake spry or solvents used are compatible with local regulations.

- b. Place the dummy cover upside down on a workbench, and place the Gauge Block onto the top surface.

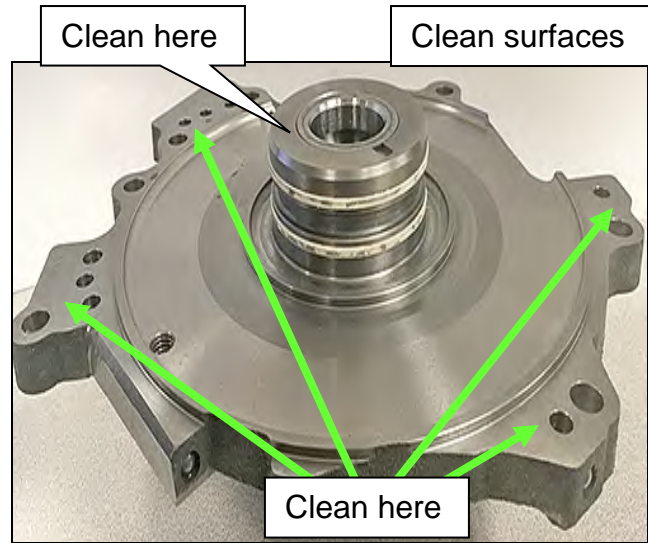


Figure 6GG

- c. Position the Depth Gauge on the Gauge Block over an outer end of the dummy cover.

**NOTE:** Make sure the Depth Gauge's datum level is flush with the top of the Gauge Block.

- d. Carefully side the Depth Gauge down until it contacts the dummy cover surface that mates with the CVT case. Write this measurement as **H1** (use millimeters).
- e. Measure this same distance on the opposite side of the dummy cover and write it as **H2**.

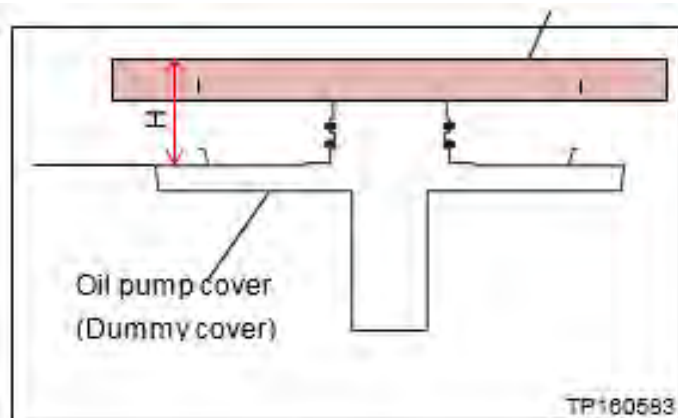
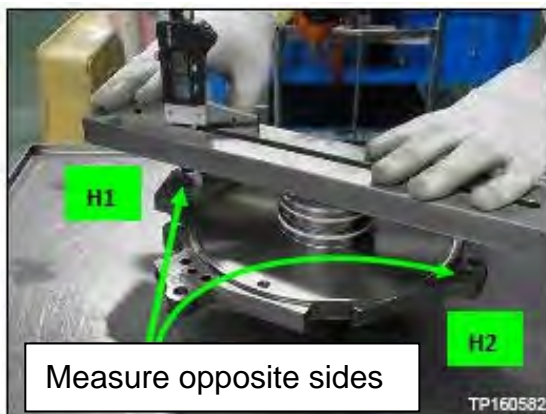


Figure 7GG

- f. Using the formula below, calculate the average and then write down the calculated value as **H**.

$$H = \frac{(H1 + H2)}{2}$$

Write the measurement for "H" here \_\_\_\_\_ mm

6. Measure the average (**J**) dummy cover height where thrust race seats as follows:
- Carefully slide the Depth Gauge down until it contacts the dummy cover surface that mates with the thrust race. Write this measurement as **J1** (use millimeters).
  - Measure this same distance on the opposite side (180 degrees) of the dummy cover and then write as **J2**.

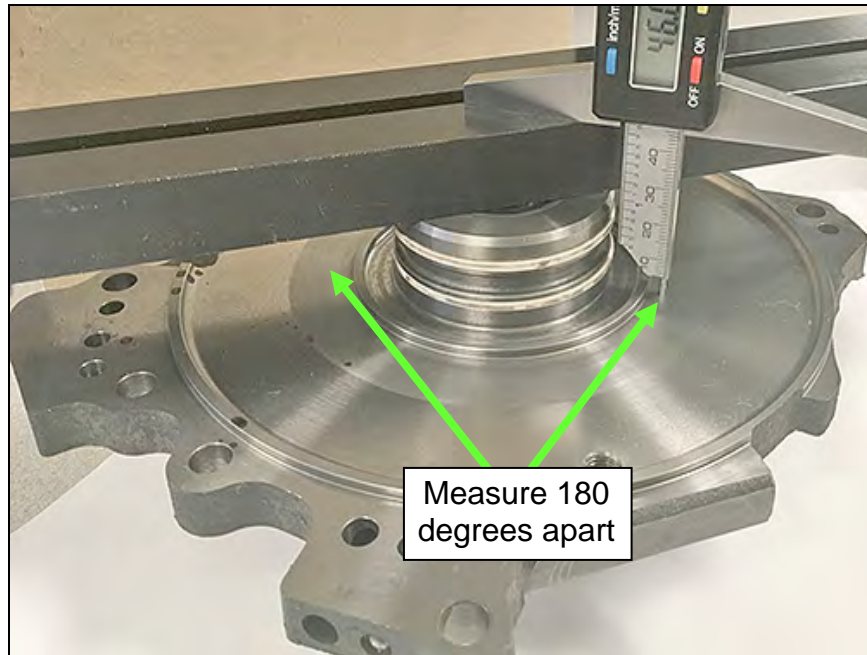


Figure 8GG

- Using the formula below, calculate the average and then write down the calculated value as **J**.

$$J = \frac{(J1 + J2)}{2}$$

Write the measurement for “**J**” here \_\_\_\_\_ mm

7. Calculate gap **G**.

**Gap G = J – H**

- Fill in the measurements below for “**J**” and “**H**” to calculate for “**G**”.

$$\begin{array}{r}
 \text{J measurement} \quad \_\_\_\_\_\_ \text{ mm} \\
 - \text{H measurement} \quad \_\_\_\_\_\_ \text{ mm} \\
 = \text{G} \text{ -----} \quad \_\_\_\_\_\_ \text{ mm}
 \end{array}$$

8. Measure thickness of the thrust bearing ONLY (without original race) as follows:
- Place the thrust bearing roller side down on the Gauge Block (Figure 9GG).  
**IMPORTANT:** Roller side of thrust bearing must face down and be flat on the Gauge Block to accurately measure thickness.
  - Measure at two different positions of the thrust bearing that are 180 degrees apart.
  - Add the two measurements, and then divide by two. Write down the calculated value as **E**.

$$E = \frac{(E1 + E2)}{2}$$

Write the measurement for "E" here \_\_\_\_\_ mm

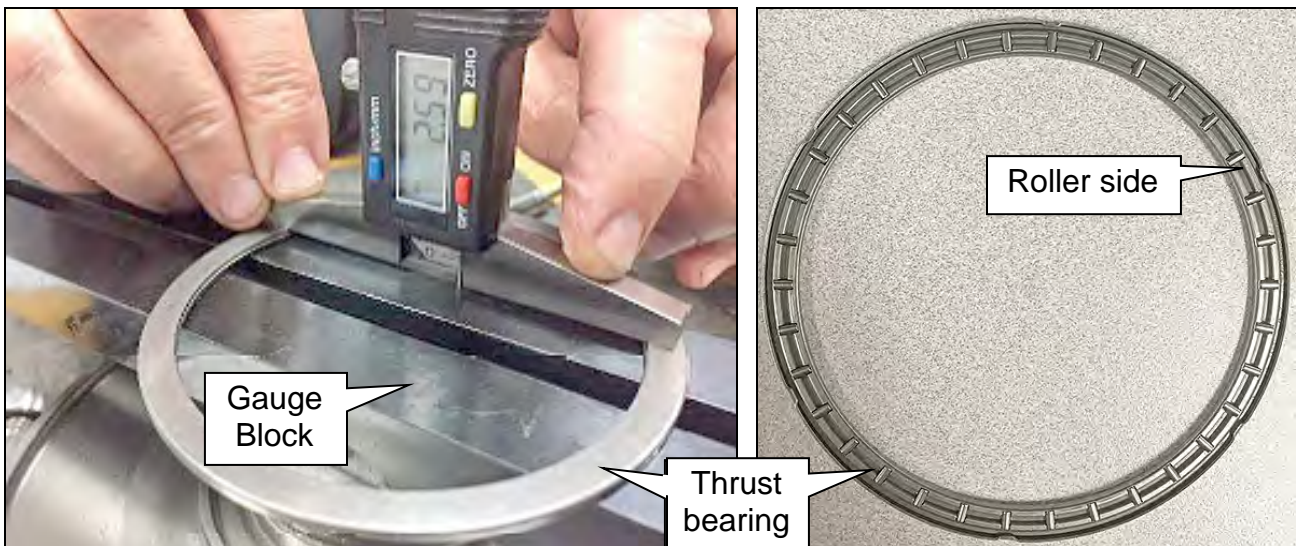


Figure 9GG

9. Choose the thrust bearing race to adjust Clutch Total Endplay (C) as follows:
- Calculate **C** (clearance).

$$\text{Total Clearance } C = D - T + G - E$$

**NOTE:** "T" is the Thickness of the Gauge Block (J-50271: 20mm).

- Fill in the measurements below for "D", "G" and "E" from pages 69-72 to calculate for "C".

D measurement \_\_\_\_\_ mm  
 - T measurement 20 mm  
 + G measurement \_\_\_\_\_ mm  
 - E measurement \_\_\_\_\_ mm  
 = C ..... mm

**Please print this page and  
attach it to the repair order.**

**EXAMPLE:** If **D** = 23.81, **G** = 0.41, **E** = 2.57

$$C = D - 20 + G - E = 23.81 - 20 + 0.41 - 2.57$$

**C = 1.65**



- b. Choose an appropriate thrust bearing race from Table B below based on **C** (seven different thrust bearing “race thicknesses” are available).

**Example:** If  $C = 1.65$  mm, it falls between the lower and upper clearances for race thickness 1.2 mm.

- c. Measure and confirm that the selected thrust bearing race is the correct thickness before installing (Figure 10GG).

**IMPORTANT:** Do not measure from the thrust bearing race lip (Figure 11GG).

**Table B**

PART #: 31435-	CLEARANCE (C) $C = D - T + G - E$	RACE THICKNESS
3WX0A	0.90 – 1.08 mm	0.6 mm
3WX0B	1.09 – 1.26 mm	0.8 mm
3WX0C	1.30 – 1.50 mm	1.0 mm
3WX0D	1.51 – 1.70 mm	1.2 mm
3WX1A	1.71 – 1.90 mm	1.4 mm
3WX1B	1.91 – 2.10 mm	1.6 mm
3WX1C	2.11 – 2.30 mm	1.8 mm

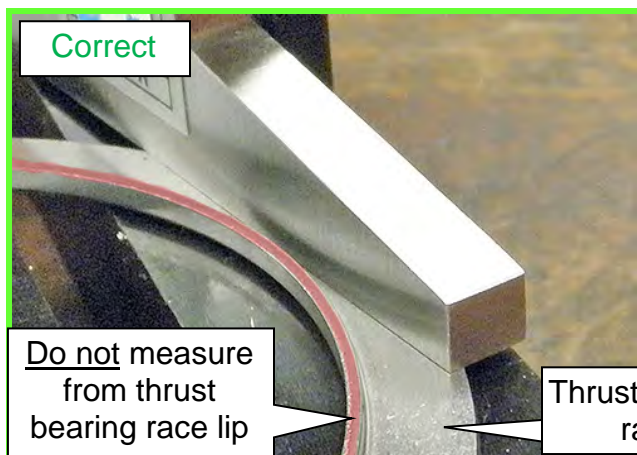


Figure 10GG

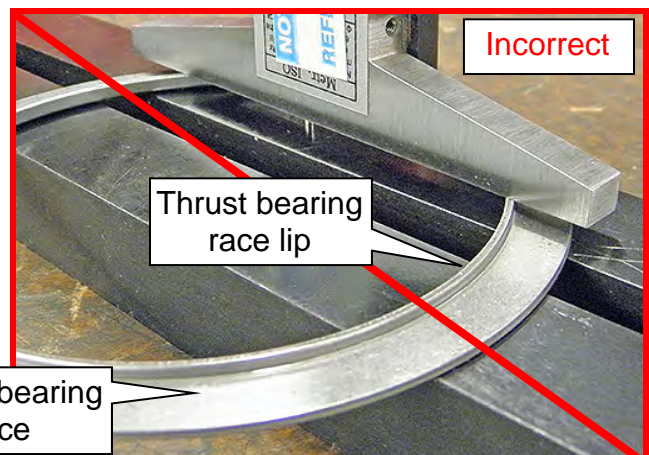


Figure 11GG

10. Install the thrust bearing onto the clutch drum.

**IMPORTANT:** The thrust bearing has two sides.

- The needle bearing side is the upper side.
- The race side mates with the clutch drum surface.



Figure 12GG

11. Install the bearing race onto the dummy cover with applying petroleum jelly or equivalent to thrust race to hold in place on the dummy cover.



Figure 13GG

## Clean the Torque Converter Housing, Dummy Cover Passages and Baffle Plates

**IMPORTANT:** Remove as much of the CVT and cleaning fluids as possible, and clean the related parts in the following steps.

1. Remove the baffle plate and lubrication tube as follows:

- a. Remove the three bolts, and then remove the baffle plate from the converter housing (Figure 1H).

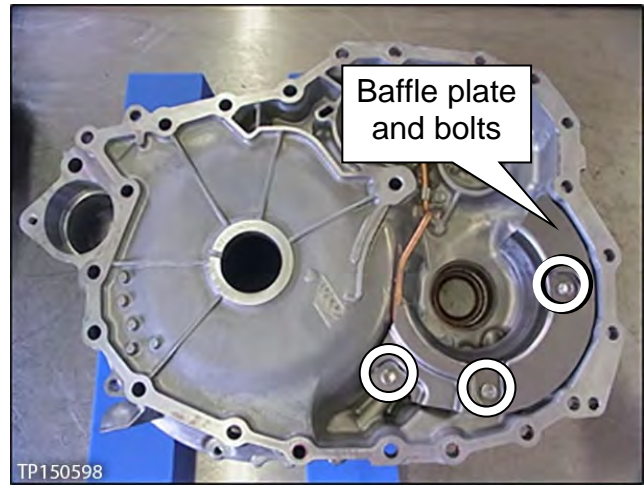


Figure 1H

- b. Remove the bolt and then remove the lubrication tube and its bracket (Figure 2H).

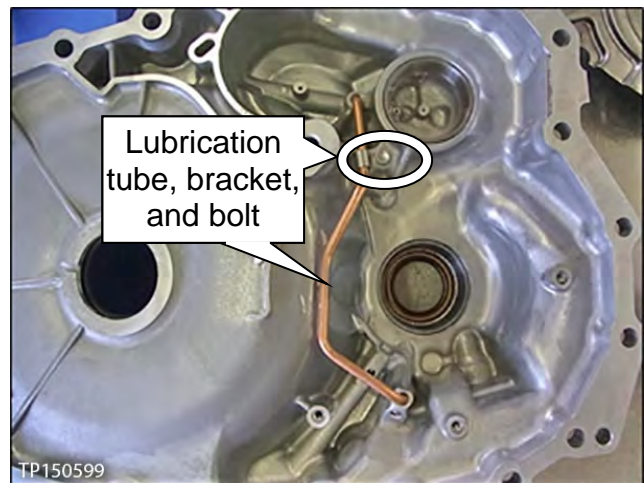


Figure 2H

2. Clean all baffle plates.

- Clean the oil passages of the converter housing, lubrication tube and dummy cover with brake cleaner (or equivalent) where shown in Figures 3H and 4H below.

**NOTE:** Do not stand in front of the passages shown while using compressed air.

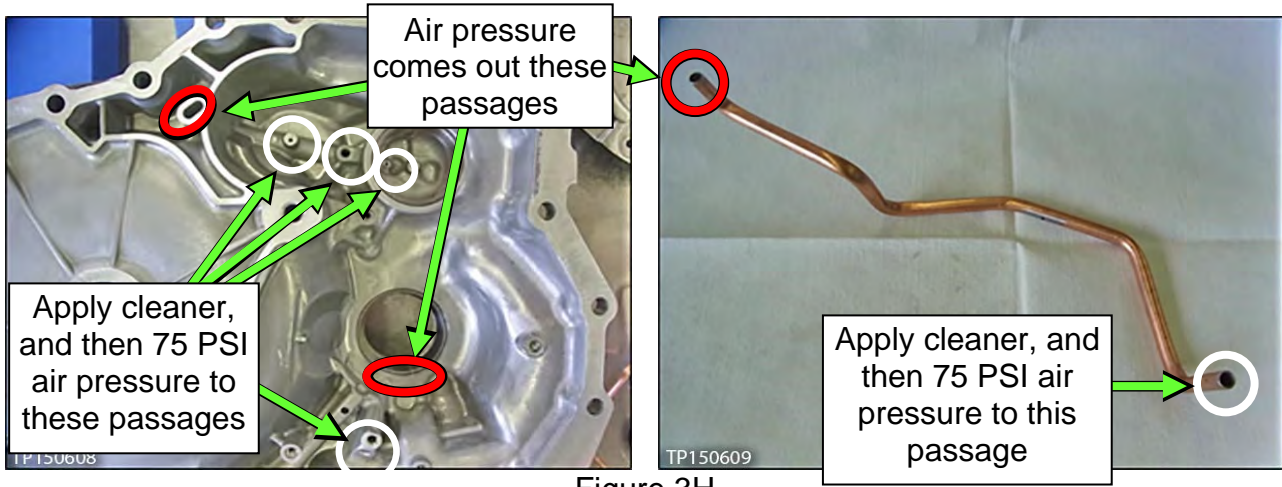


Figure 3H

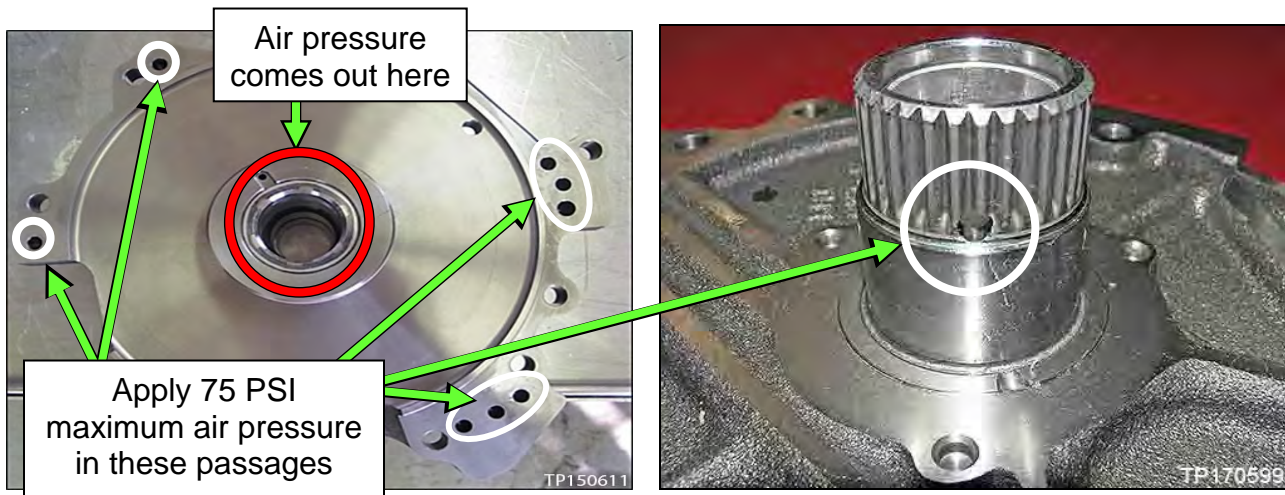


Figure 4H

- Install the lubrication tube and bracket, and then the baffle plate with three bolts (Figure 5H).

➤ Bolt torque: 5.9 N•m (0.6 kg-m, **52 in-lb.**)

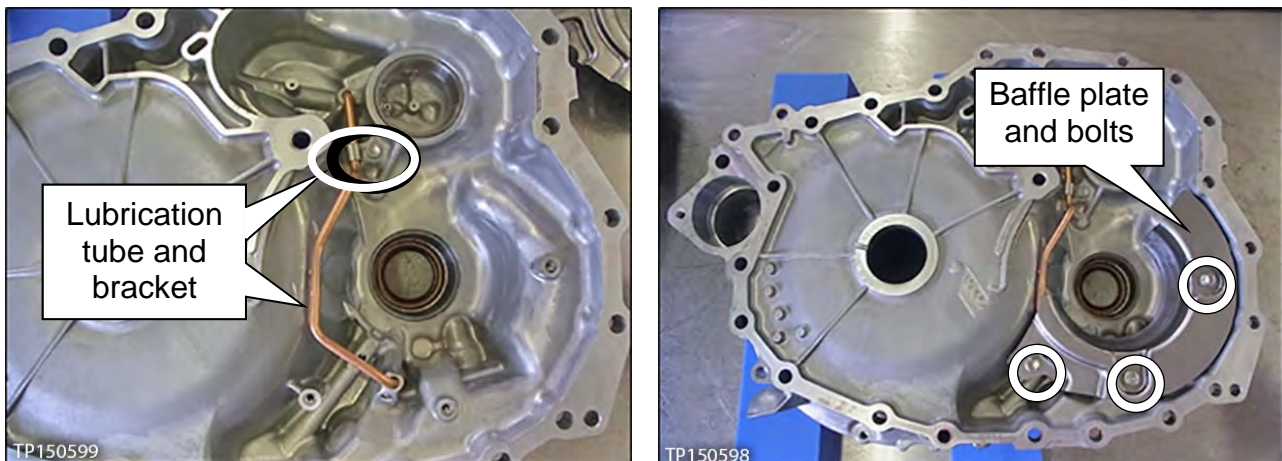


Figure 5H

## CVT Reassembly

1. Install a new torque converter seal with Seal Installer J-50818 (Figure 1I).
  - Place the torque converter housing flat during installation.
  - Apply a light coat of CVT fluid to the seal lip surfaces.
  - The torque converter housing seal will be 0.5 mm (**0.020 inches**) below the bore's surface when the seal installer bottoms out.

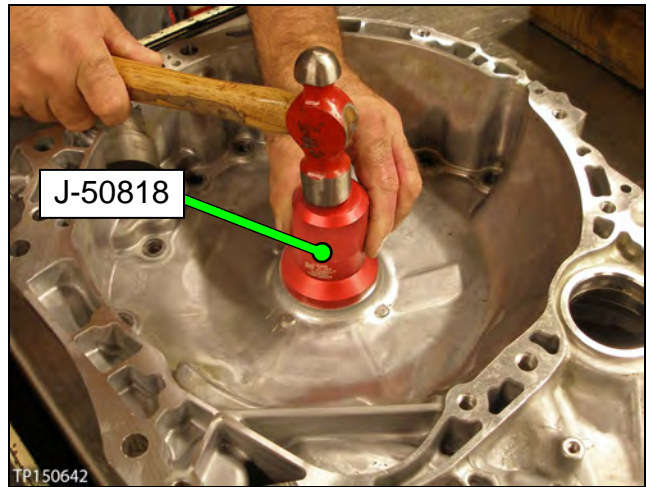


Figure 1I

2. Is this vehicle an all-wheel drive (AWD)?  
**YES:** Proceed to step 3.  
**NO:** Install the torque converter housing side axle seal (Figure 2I).
  - Use Seal Installer J-52284 and Driver Handle J-8092.
  - Apply a light coat of CVT fluid to the seal lip surfaces.
  - Proceed to step 3.

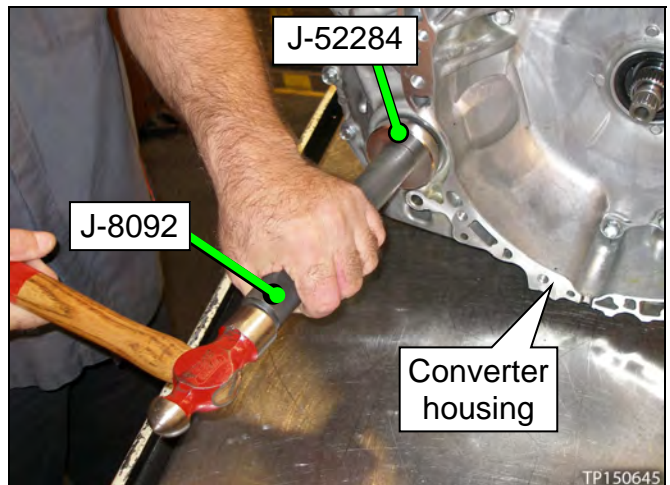


Figure 2I

- Apply petroleum jelly or equivalent to the dummy cover's lathe cut seals (Figure 3I) before installing the dummy cover to the CVT case.

**IMPORTANT:**

- Confirm that the lathe cut seals (white seals) are in their appropriate slots. Carefully reposition seals as necessary.
- Lathe cut seals must be in correct positions during final assembly to prevent drivability issues.**

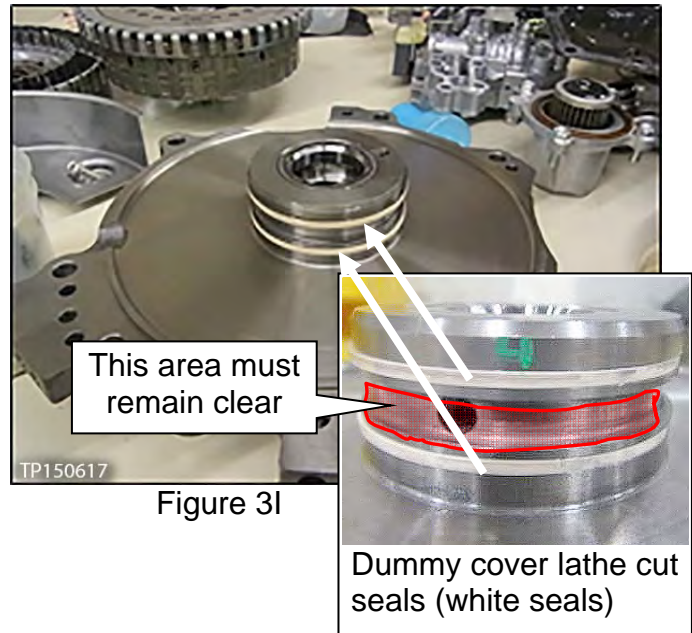


Figure 3I

- Confirm that the input shaft's lathe cut seals are in the correct locations.

**IMPORTANT:**

- Lathe cut seals (white seals) must be in their appropriate slots. Carefully reposition seals as necessary.
- Lathe cut seals must be in correct positions during final assembly to prevent drivability issues.**

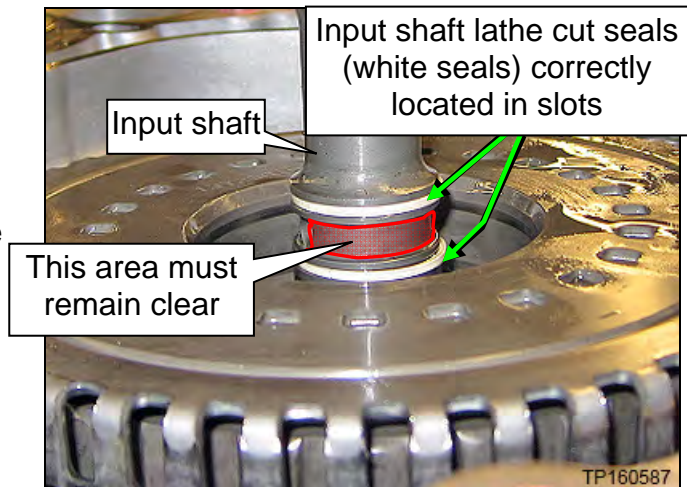


Figure 4I

- Install the dummy cover first, then baffle plate C, and then the related bolts finger tight (Figure 5I).

**IMPORTANT:** Visually check that the dummy cover is fully seated on the CVT case. If it is not, refer to **Trouble Shooting** pages 98-99.

- Do not force the dummy cover into place.
- Make sure the dummy cover is fully seated before installing the bolts.
- Do not torque these bolts at this time.

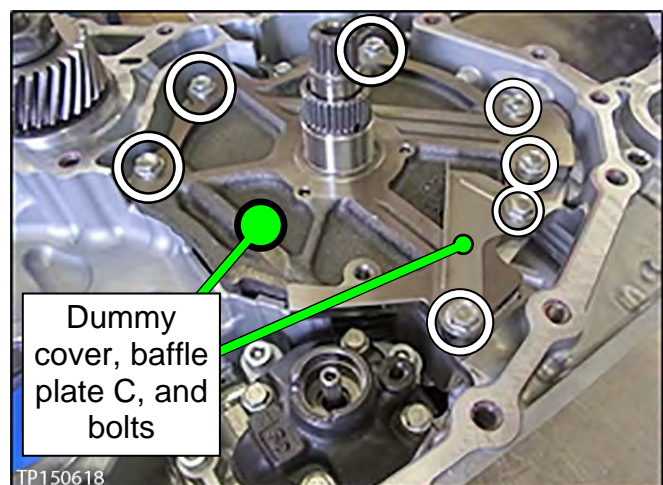


Figure 5I

6. Install baffle plate B and “L” bracket with the related bolts finger tight (Figure 6I).
7. Torque the bolts from step 5 and 6 in the following order:
  - a. Baffle plate B bolts: 5.9 N•m (0.6 kg-m, **52.2 in-lb.**)
  - b. “L” bracket bolts: 25.5 N-m (2.6 kg-m, **19 ft-lb**). Torque **1** and then **2** .
  - c. Dummy cover and baffle plate C bolts torque: 19.0 N•m (1.9 kg-m, **14 ft-lb.**)

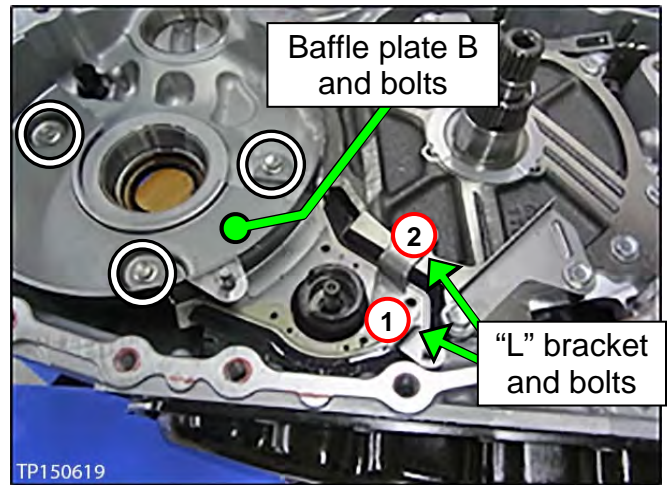


Figure 6I

8. Install the thrust washer onto the dummy cover (Figure 7I).
  - Use petroleum jelly or equivalent to hold the thrust washer in place.
  - Make sure the tabs fit into the holes.

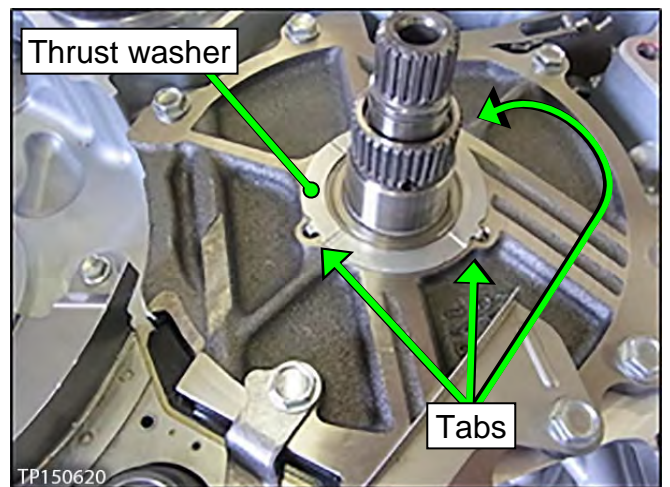


Figure 7I

9. Install the drive sprocket, driven sprocket, and chain as an assembly (Figure 8I).
- Make sure the raised edge (wider edge) on the drive sprocket is facing up (Figure 8I).

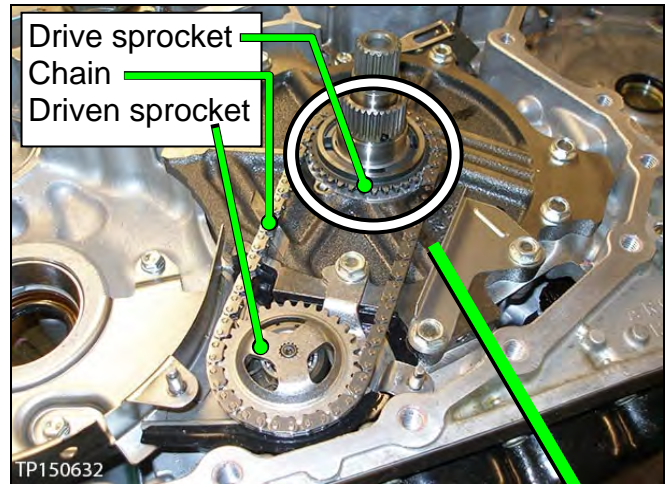


Figure 8I

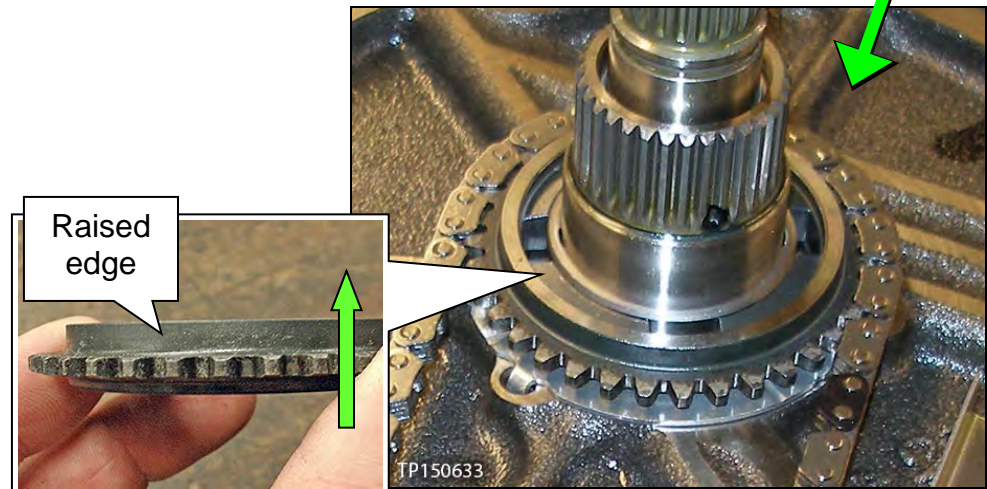


Figure 9I

- Expand the snap ring with a suitable tool, and then push down on the driven sprocket until it bottoms out (Figure 10I).
- Release the snap ring and then pull up on the driven sprocket until the snap ring locks into its groove.

**NOTE:** A click sound is heard when the snap ring locks in place.

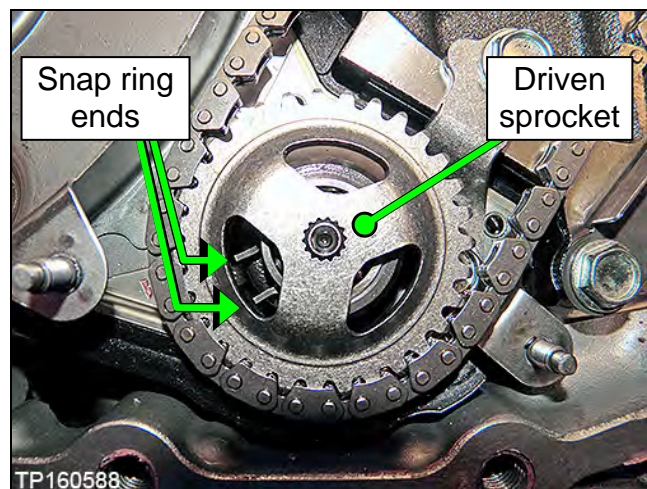


Figure 10I



10. Install baffle plate A with two nuts (Figure 11I).

- Nut torque: 5.9 N•m (0.6 kg-m, **52.2 in-lb.**)

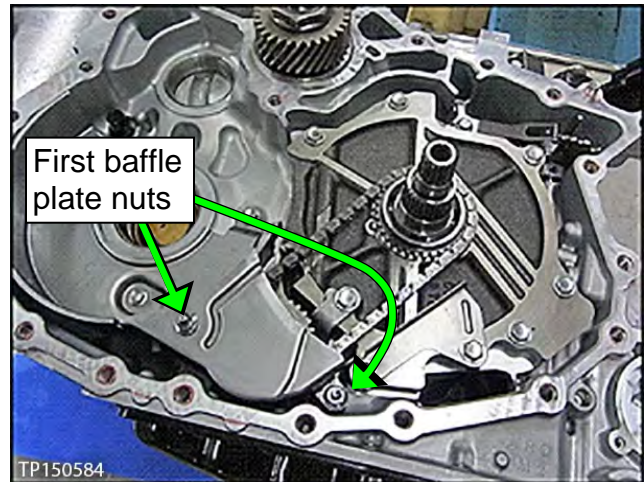


Figure 11I

11. Install a new O-ring on the input shaft (Figure 12I).

- Apply CVT fluid to the O-ring and O-ring groove before installing.

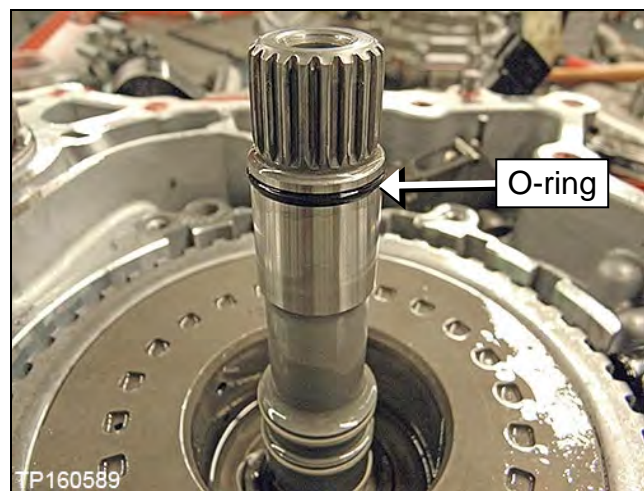


Figure 12I

12. Install the differential assembly and the reduction gear assembly into the CVT case (Figure 13I).

- Thoroughly clean each assembly before installing.
- Oil the bearings and gear teeth with CVT fluid before installing.

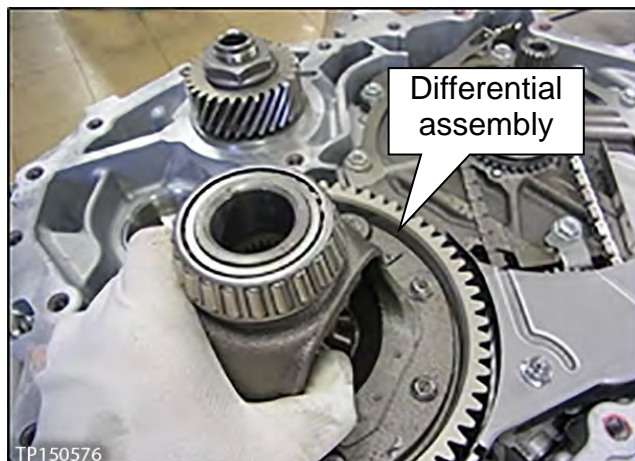


Figure 13I

13. Confirm the pin (Figure 14I) is located in the CVT case prior to installation of the converter housing.

**NOTE:** If necessary apply petroleum jelly or equivalent to keep it in place.

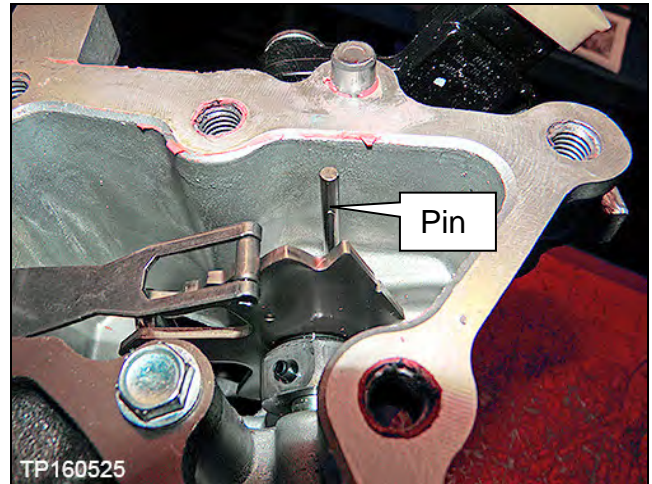


Figure 14I

14. Apply one continuous 2.0 mm (**0.8 inches**) diameter bead (Figure 15I) of pink colored Loctite 5460 Sealant (see the Parts Information section of this bulletin).

- Before sealant application, make sure the mating surfaces are clean from oil, dirt, old sealant, etc. (Figure 15I).

**IMPORTANT:** Have the converter housing ready for installation prior to applying the sealant.

**NOTE:**

- Start applying sealant where shown, making sure that the starting point and the ending point are about the middle between the bolt holes.
- Overlap both ends of the bead by 3-5 mm (**0.12-0.20 inches**).
- Make sure to apply sealant around the center bolt hole.

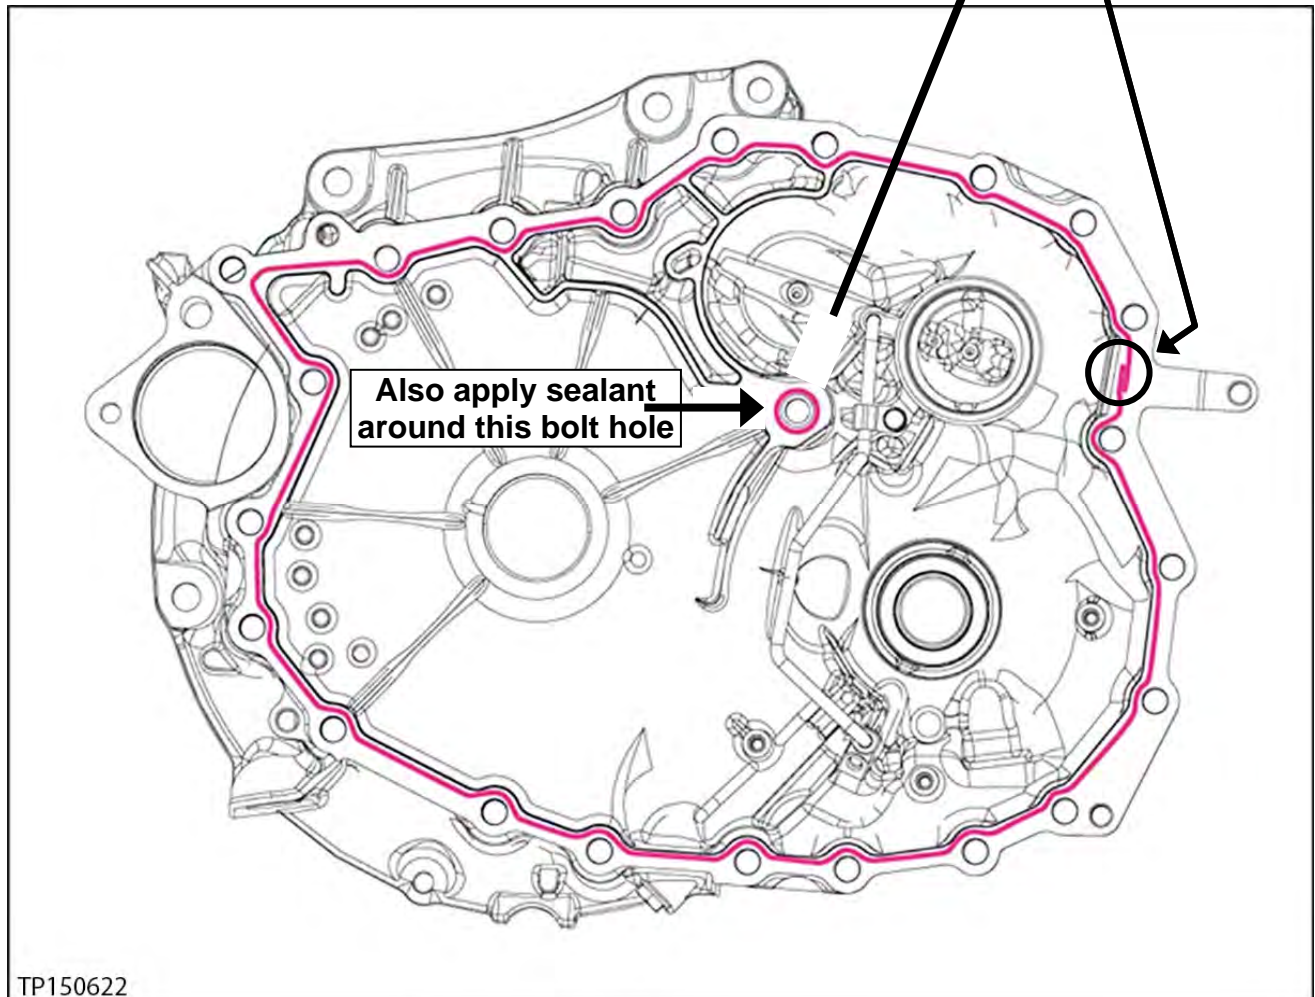




Figure 15I

TP150622

15. Install the torque converter housing onto the CVT case (see Figure 16l for torque sequence):

- Install new bolts (24).
  - a. Torque the first six (6) bolts with symbol  in numbered sequence (see below).
  - b. Torque the remaining bolts with symbol  in numbered sequence (see below).
    - All bolts are 30 mm (1.2 inches) in length.
    - Bolt torque: 45.0 N•m (4.6 kg-m, 33.2 ft-lb.)

**IMPORTANT:** Make sure to torque the bolts in the sequence shown (Figure 16l).

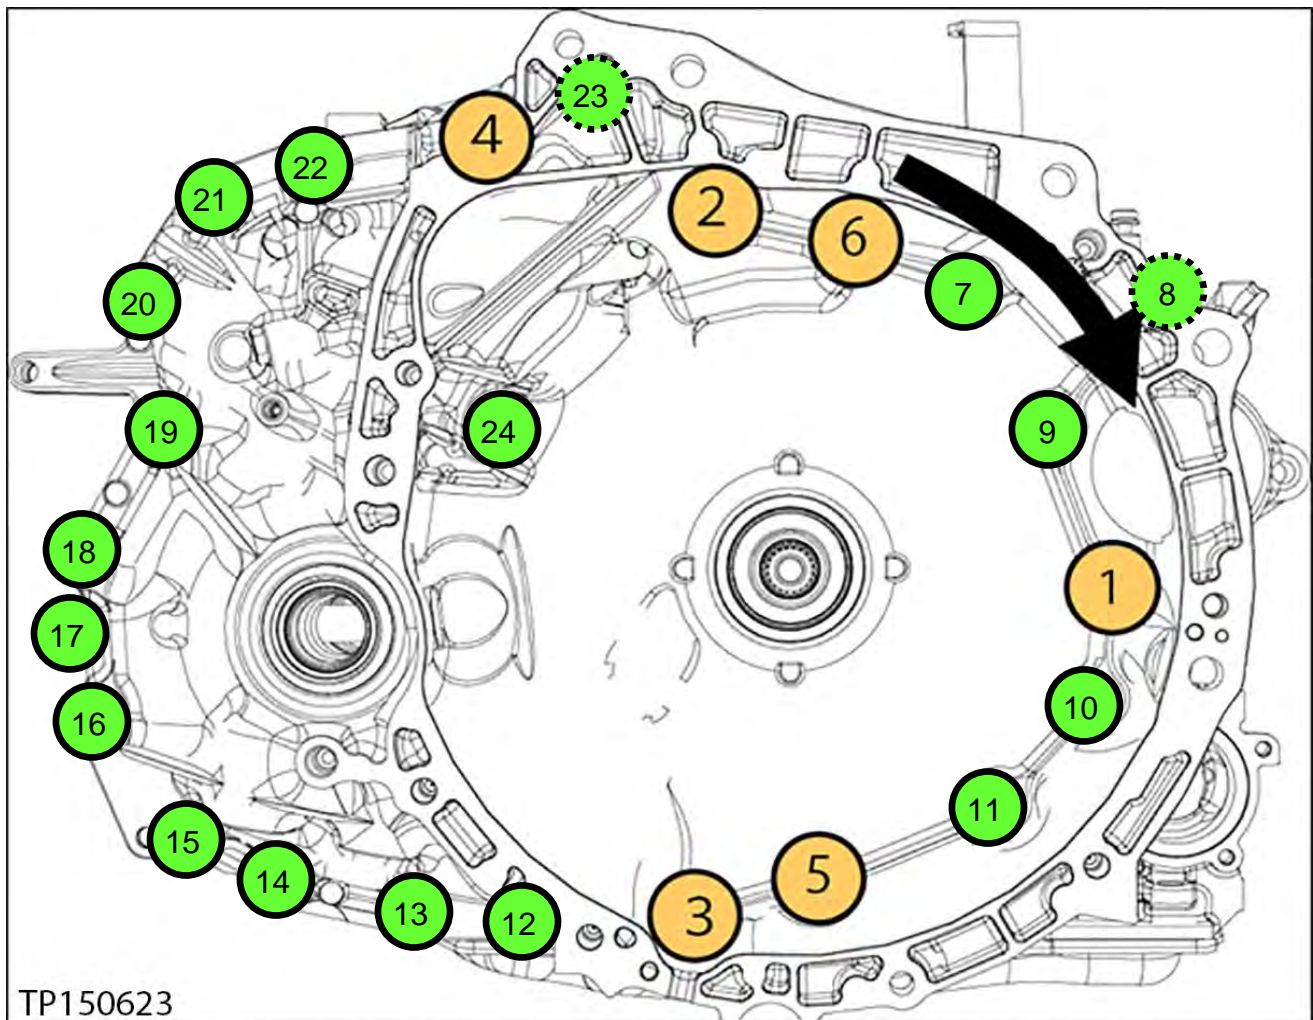


Figure 16l

16. Clean off the excess sealant.

## Control Valve (Valve Body) Strainer and Pan Installation

### IMPORTANT:

- Installation steps in this bulletin may contain different style parts than what were originally installed in the CVT. Pay careful attention, REASSEMBLY MAY NOT BE IDENTICAL TO DISASSEMBLY.
- **Confirm that the QR label, control valve and CD part numbers all match before installing the control valve** (refer to NTB12-103).
- For additional information, see video # 547: “CVT Belt and Pulley Replacement” and fast forward to minute marker 19:52. This video is located under the TECH TRAINING GARAGE VIDEOS tab in Virtual Academy.

**CAUTION:** Handle the valve body carefully.

**NOTE:** If an oil strainer bracket was removed, discard it. An oil strainer bracket (Figure 1J) will not be used with the new oil strainer.

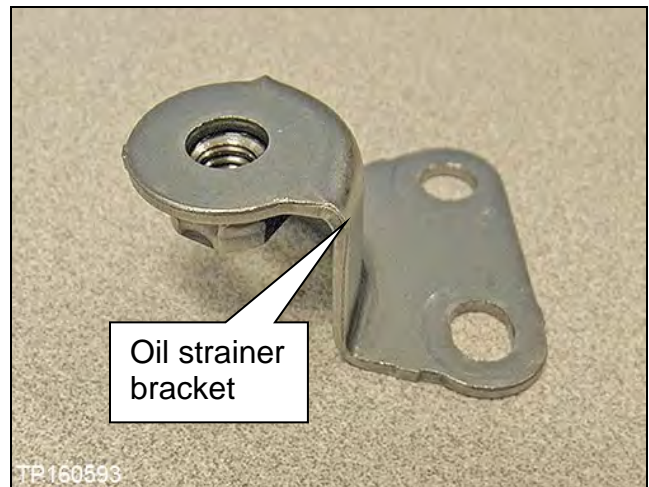


Figure 1J

1. Install a new lip seal (Figure 2J).

- Do NOT reuse the old lip seal.
- Apply a small amount of petroleum jelly or equivalent to the lip seal to keep it in place on the CVT.

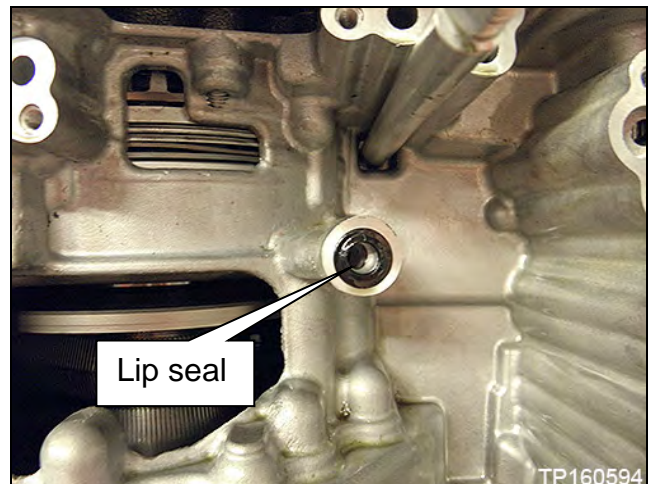


Figure 2J

2. Install the Control Valve with eleven (11) mounting bolts (Figure 3J).

**IMPORTANT:** Leave four (4) ✘ bolt holes blank at this step.

**CAUTION:** Make sure the wiring harness does not get pinched (see Figures 4J and 5J for correct routing).

- 54 mm (2.125 inches) long bolt ●; 7 pieces
- 44 mm (1.73 inch) long bolt ●; 2 pieces
- 25 mm long (1 inch) long bolt ●; 2 pieces

**CAUTION:** The two 25 mm bolts are installed WITHOUT the strainer bracket.

- Bolt torque: 7.9 N•m (0.81 kg-m, 70 in-lb.)

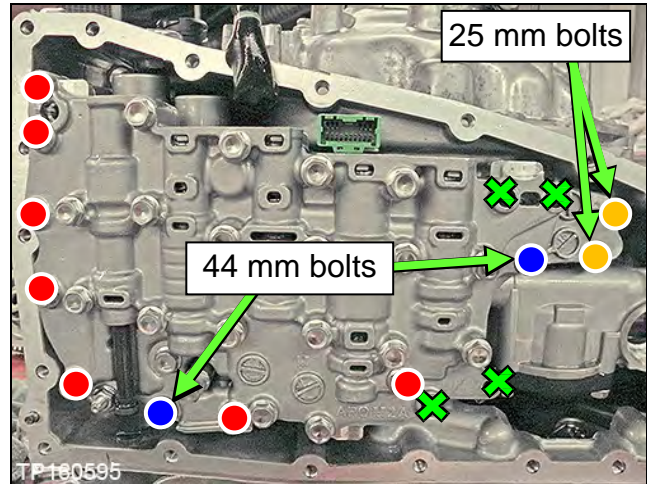


Figure 3J

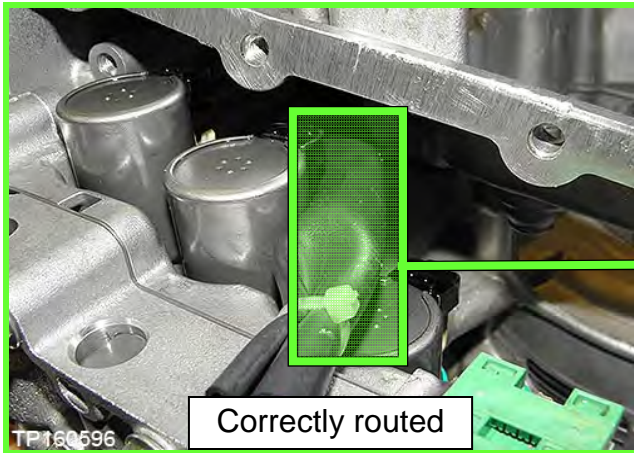


Figure 4J

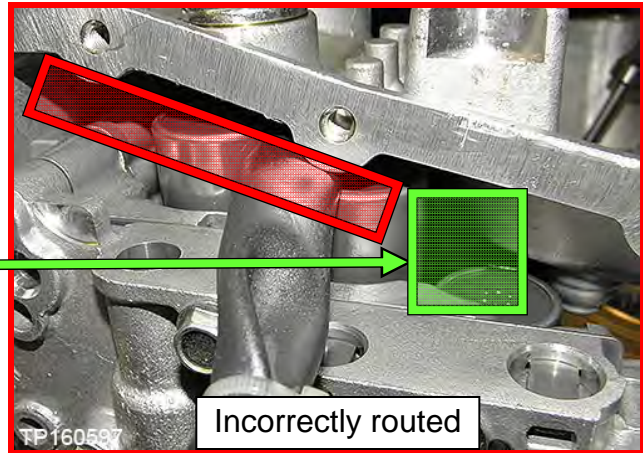


Figure 5J

3. Replace the metal bracket of the fluid temperature sensor as follows:

**NOTE:** The new bracket will be oriented the same way the old bracket was.


- a. Cut the old plastic zip tie with an appropriate tool to remove the fluid temperature sensor's metal bracket from the terminal harness assembly (Figure 6J and Figure 7J).

**CAUTION:** Cut the plastic zip tie over the metal bracket to avoid damage to the fluid temperature sensor.

- b. Discard the removed metal bracket and plastic zip tie.
- c. Use the new plastic zip tie from the Parts Information to attach the fluid temperature sensor of the terminal connector harness to the fluid temperature sensor's new metal bracket.

**IMPORTANT:**

- Locate the plastic zip tie at the center notch of three notches on the fluid temperature sensor (Figure 7J).
  - Tighten the plastic zip tie so that it is oriented as shown in Figure 6J.
- d. Cut off the plastic zip tie excess.

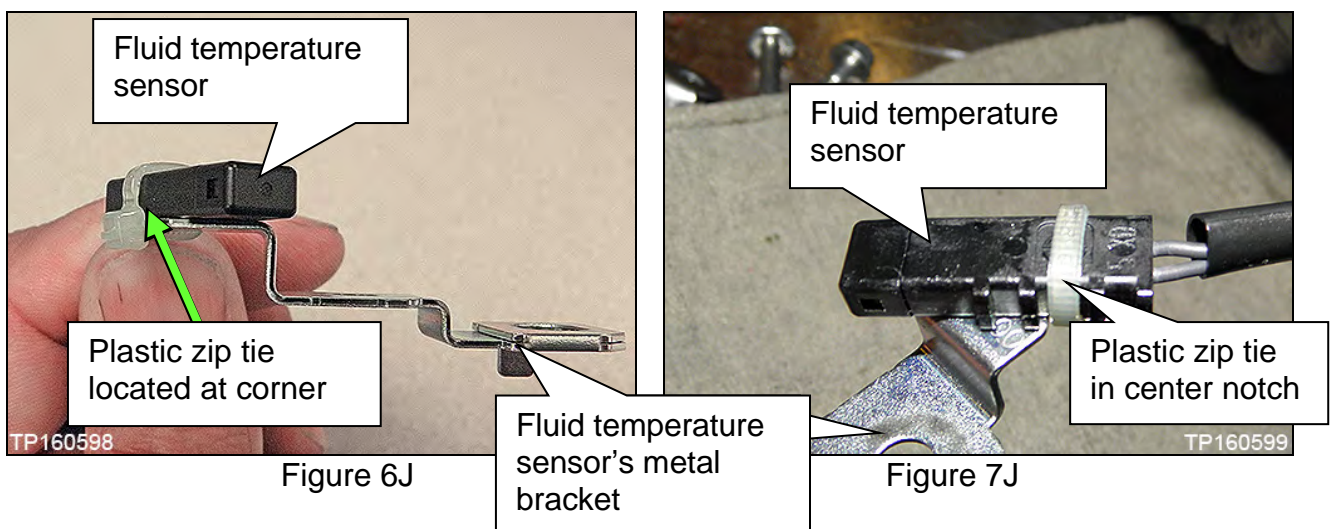

4. Connect the electrical harness connector (Figure 8J).

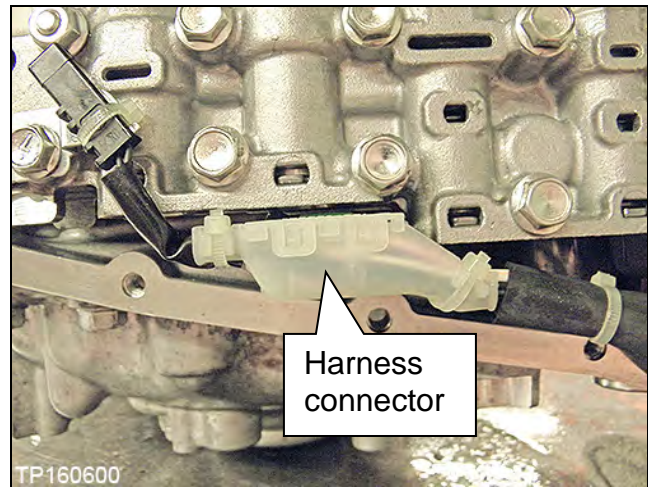


Figure 8J

5. Install the CVT fluid temperature sensor bracket to the valve body with one (1) bolt (Figure 9J).

**NOTE:** Leave one (1) bolt hole blank as it will be used to secure the oil strainer at a later step.

- 54 mm (2.125 inches) long bolt.
  - Bolt torque: 7.9 N•m (0.81 kg-m, 70 in-lb.)

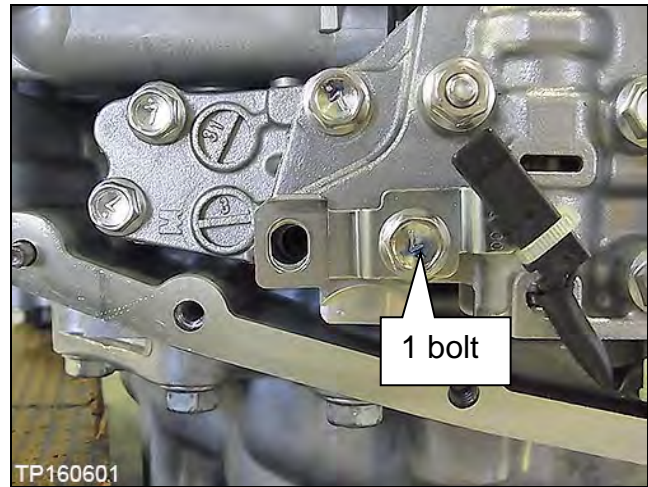



Figure 9J

6. Install the new oil strainer with its new O-ring seal with two (2) bolts (Figure 10J).

**NOTE:** Replacement strainer maybe a different shape than the original.

- 54 mm (2.125 inches) long bolt ; 2 pieces.
  - Bolt torque: 7.9 N•m (0.81 kg-m, 70 in-lb.)

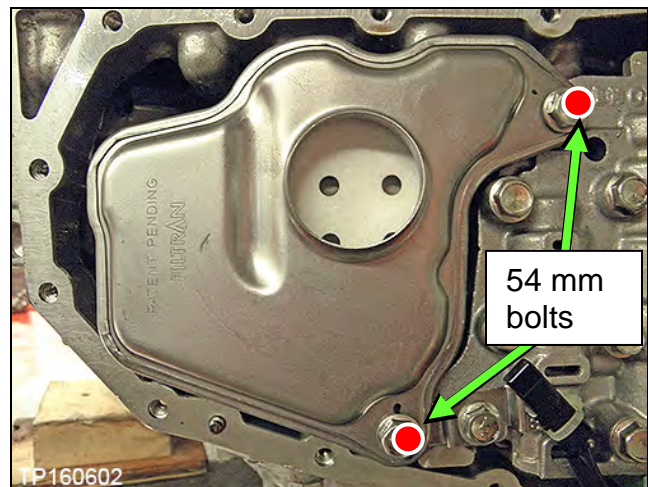


Figure 10J



7. Install the manual plate, lock washer, and nut (Figure 11J).

**NOTE:** Make sure the manual plate fits into the slot of the manual valve before applying torque to the nut.

- Reuse the existing manual plate, lock washer, and nut.
  - Nut torque: 22.1 N•m (2.3 kg-m, **16 ft-lb.**)

8. Clean the original oil pan and magnets with a suitable cleaner. Visible debris should not be present at re-assembly.

9. Reassemble the original magnets to the pan.

**NOTE:** Return the magnets to their original locations.

10. Install a new oil pan gasket to the pan.

11. Install the oil pan bolts (see Figure 12J).

- Reuse the existing pan bolts.
  - Oil pan bolts torque: 7.9 N•m (0.81 kg-m, **70 in-lb.**)

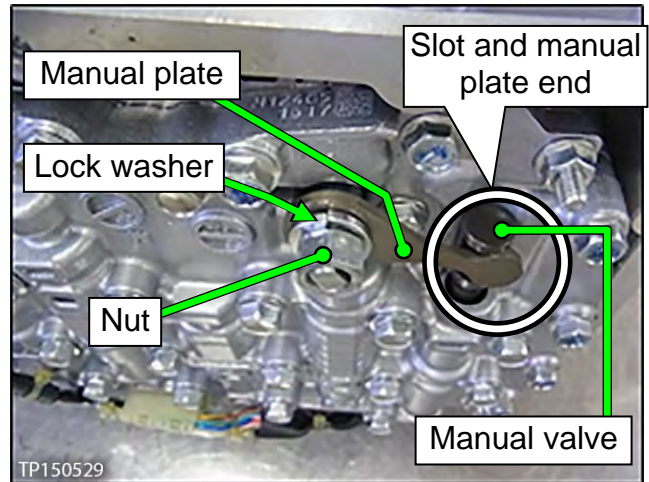


Figure 11J

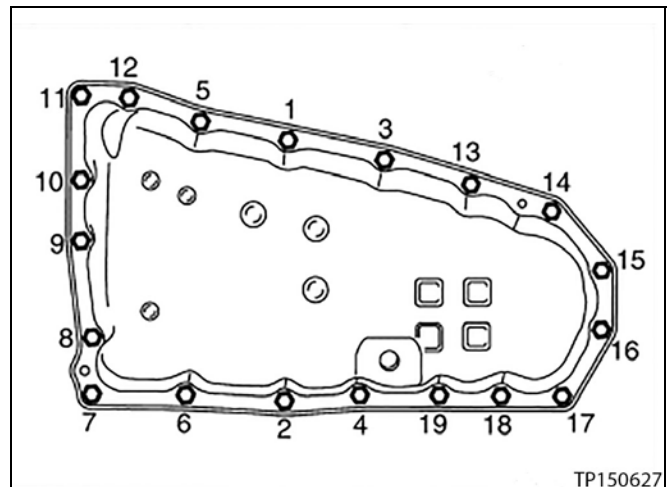


Figure 12J

12. Install a new drain washer to the drain plug on the oil pan.


13. Install the primary speed sensor to the CVT assembly. (Perform only if installing CVT assembly.)

**IMPORTANT:** Install a new O-ring to the speed sensor before installation. DO NOT reuse the old O-ring.

- Bolt torque: 5.9 N•m (0.6 kg-m, **52 in-lb.**)



14. Install the torque converter to the CVT assembly. (Perform only if installing CVT assembly.)

- Verify the torque converter is installed at the proper depth (see Figure 13J).
- $\textcircled{A}$  = 14.4 mm

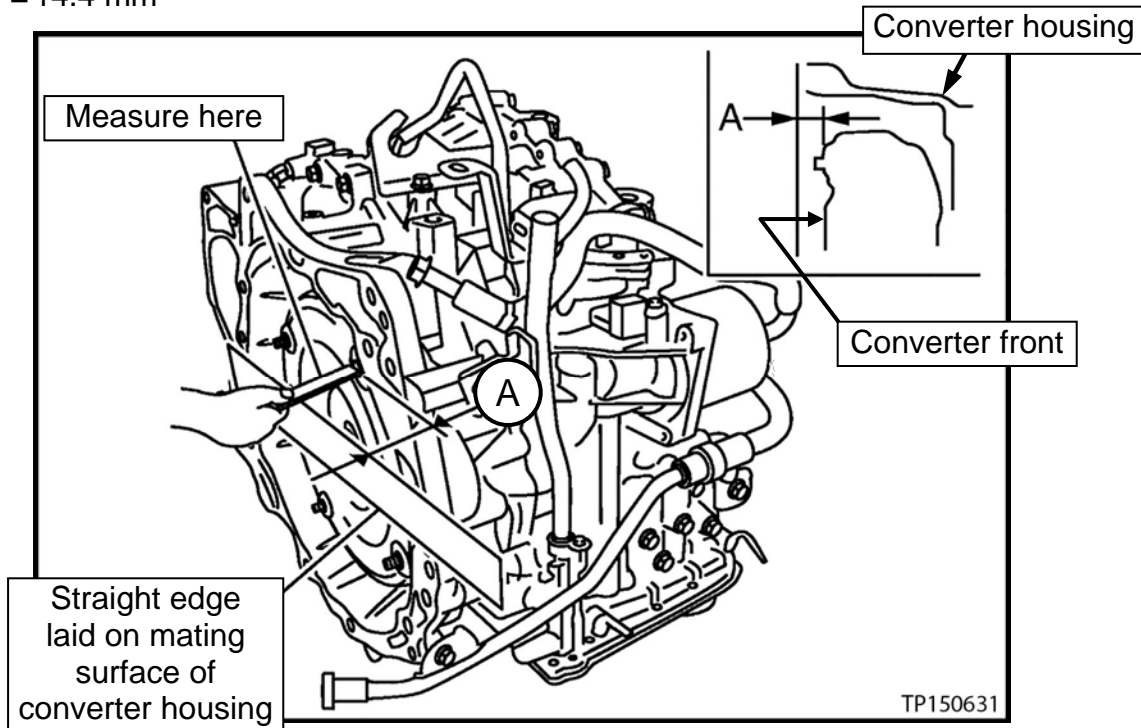

15. Attach the QR label (Figure 14J) with the new calibration data onto the transmission range switch (inhibitor switch Figure 15J).

- A QR Label and CD-R are included with the new valve body.
- Confirm that the QR label and the CD-R part numbers are the same (Figure 14J).

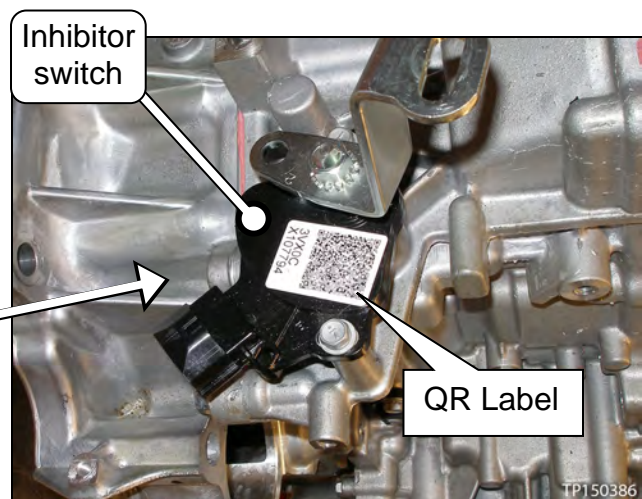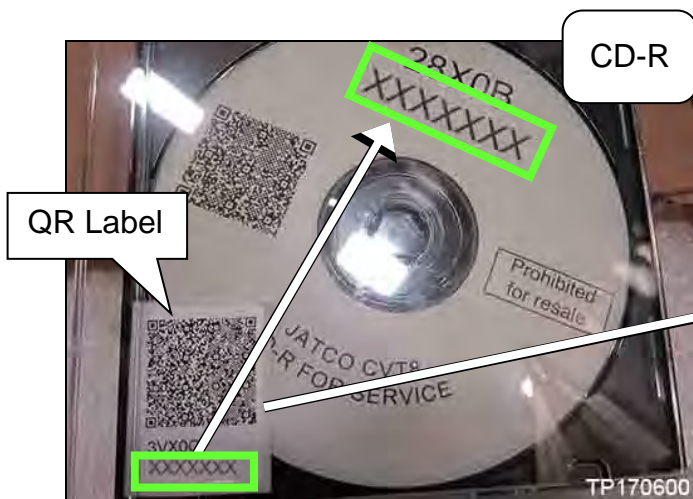

16. If only the valve body (control valve) was replaced, skip to step 2 on the next page.

## Install the CVT Assembly

1. Install the CVT assembly into the vehicle.

**NOTE:** Refer to the Electronic Service Manual (ESM), section **TM – Transaxle & Transmission**, for CVT installation.

**And then,**

- 2WD vehicles skip to step 2 below:
- Vehicles with all-wheel drive, install the transfer case as follows:
  - a. Replace only the external O-ring to the transfer case and then install the transfer case to the CVT.
    - Apply CVT fluid to the O-ring.

**NOTE:**

- Refer to the ESM, section **DLN – Driveline**, for the transfer assembly installation.

External O-ring  
to the transfer  
case

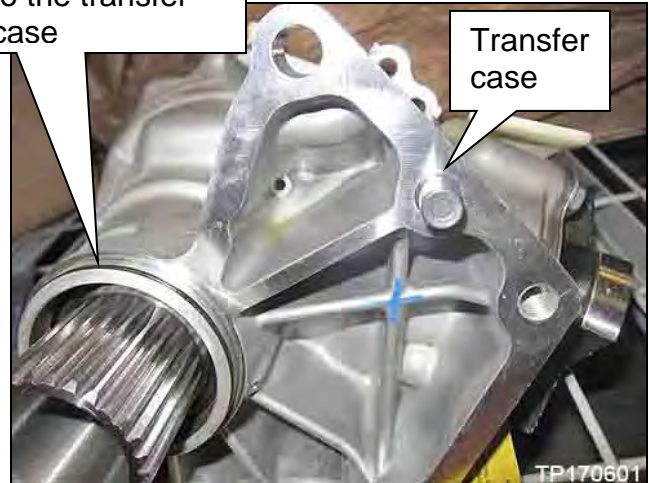


Figure 16J

- Use extreme caution when installing the axle to the transfer assembly to avoid seal damage or deformation.
- Properly support and guide the axle.

- b. Proceed to step 2.

2. Flush the CVT cooler.

**IMPORTANT:** A CVT Cooler flush is required. Refer to bulletin NTB15-013 to perform CVT Cooler flush.

3. Connect both battery cables, negative cable last.

4. Reset/reinitialize systems as needed.

- Refer to the ESM, section **PG – Power Supply & Ground Elements**, for a listing of systems that require reset/initialization after reconnecting the 12V battery.
- Look in the PG section index for **ADDITIONAL SERVICE WHEN REMOVING BATTERY NEGATIVE TERMINAL**.
- This list often includes items such as radio, power windows, clock, sunroof, etc.

Proceed to the next page.

5. Perform **ADDITIONAL SERVICE WHEN REPLACING CONTROL VALVE.**

- Refer to **TM – Transaxle & Transmission / RE0F10E / BASIC INSPECTION**, and perform **ADDITIONAL SERVICE WHEN REPLACING CONTROL VALVE.**

**IMPORTANT:** Check off these additional services as they are completed and attach this to the repair order when finished.

6. Verify the CVT operates normally and no abnormal noises are heard during a test drive.

<b>CHECK OFF</b>	<b>ADDITIONAL SERVICE PROCEDURE</b>
	PRINT CURRENT CALIBRATION DATA
	CHECK THE SERIAL NUMBER
	WRITE THE DATA
	PRINT NEW CALIBRATION DATA
	<b>FWD CLUTCH POINT LEARNING (Using procedure starting below)</b>
	PERFORM SELECT LEARNING (DRIVE/REVERSE LEARNING)
	ERASE CVT FLUID DEGRADATION LEVEL DATA

**FWD CLUTCH POINT LEARNING** (using CONSULT-III plus)

1. Apply the vehicle's parking brake.
2. Start the engine and warm up to operating temperature (50-100° C [**122-212° F**]).
3. Connect the CONSULT PC to the vehicle.
4. Start CONSULT-III plus (C-III plus).

5. Wait for the plus VI to be recognized.
  - The serial number will display when the plus VI is recognized.
6. Select **Diagnosis (One System)**.

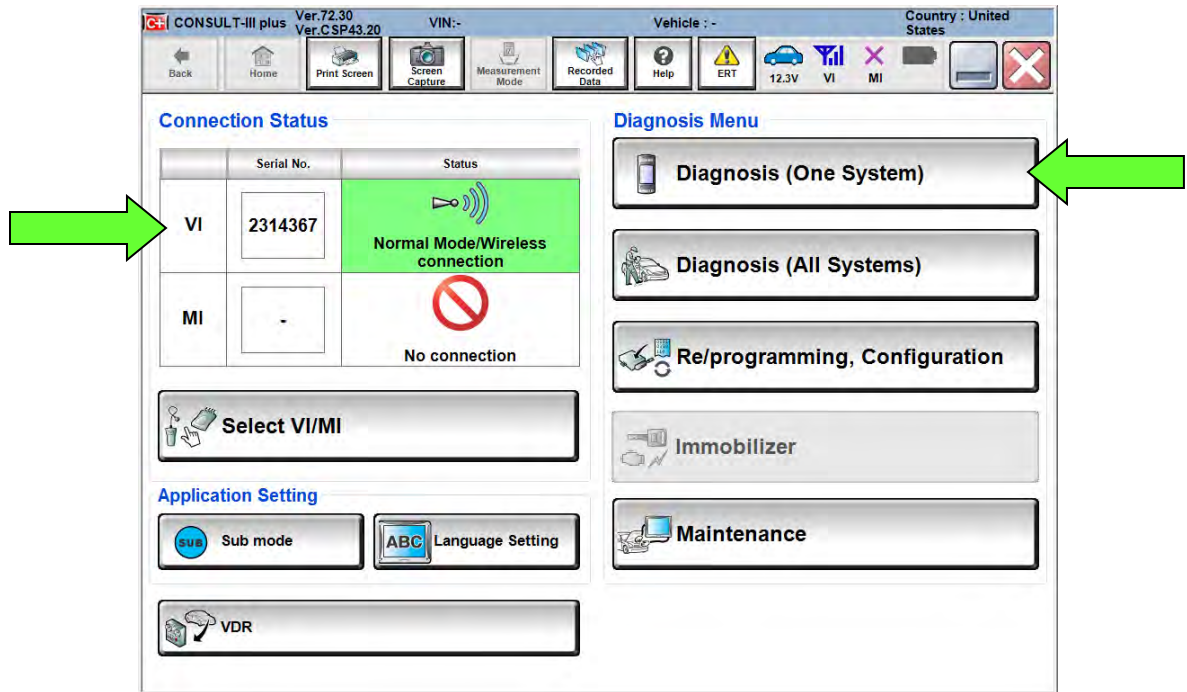


Figure 17J

7. Select **Work Support** under TRANSMISSION.

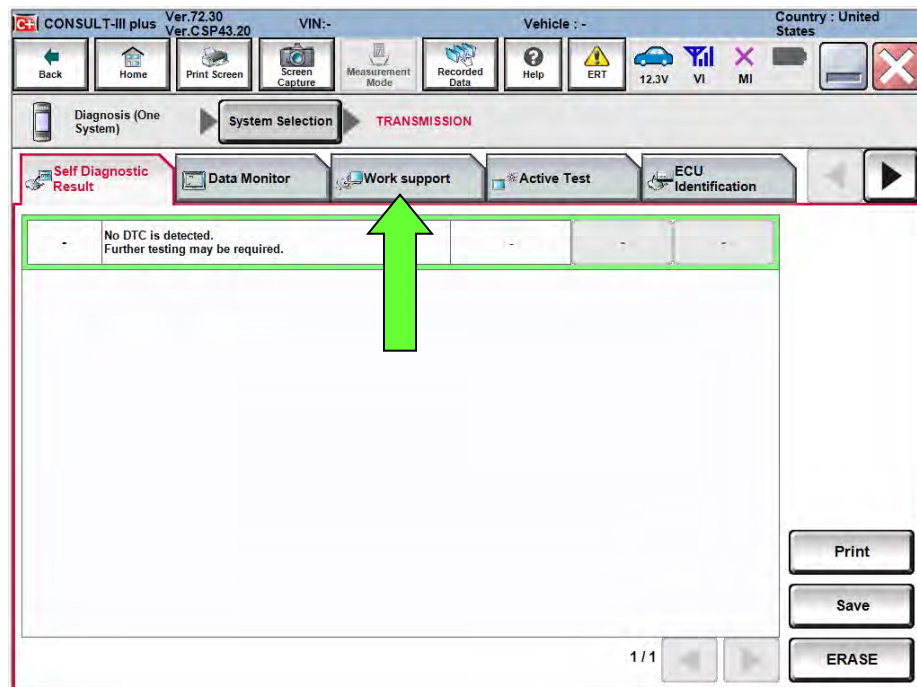


Figure 18J

**IMPORTANT:** The following **FWD CLUTCH POINT LEARNING** will be performed twice. Once in drive (D) and once in reverse (R).

8. Select **FWD CLUTCH POINT LEARNING** and then **Start**.

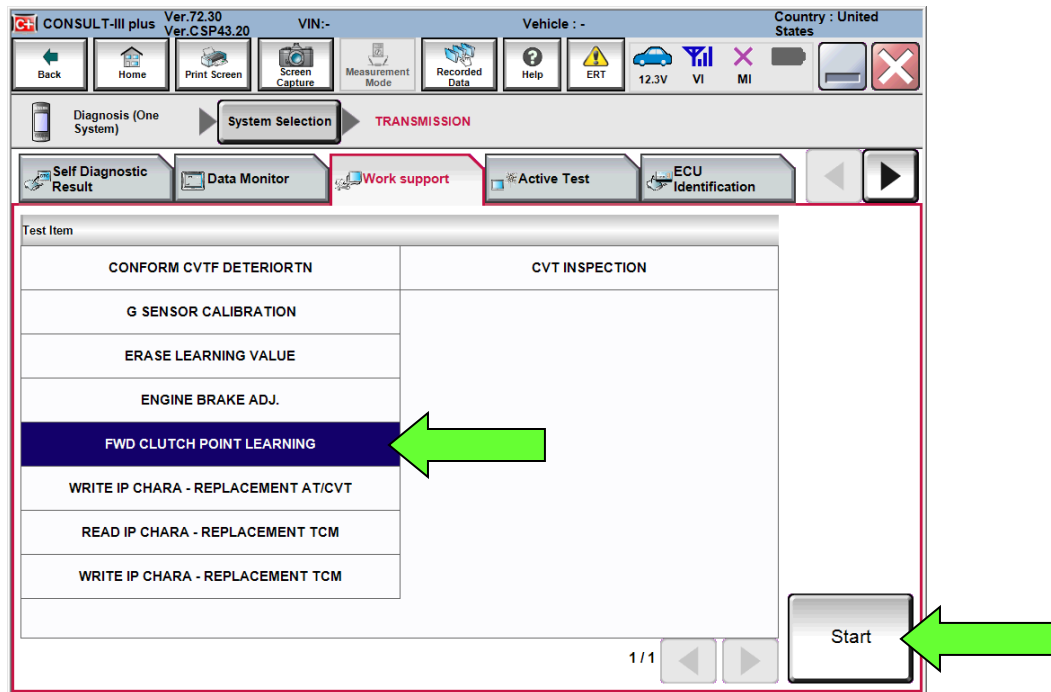


Figure 19J

9. With the engine still running and at idle, depress the brake pedal and shift the CVT into neutral (N).

- Confirm that all of the required conditions indicated in Figure 20J are being met.

10. Select **Start**.

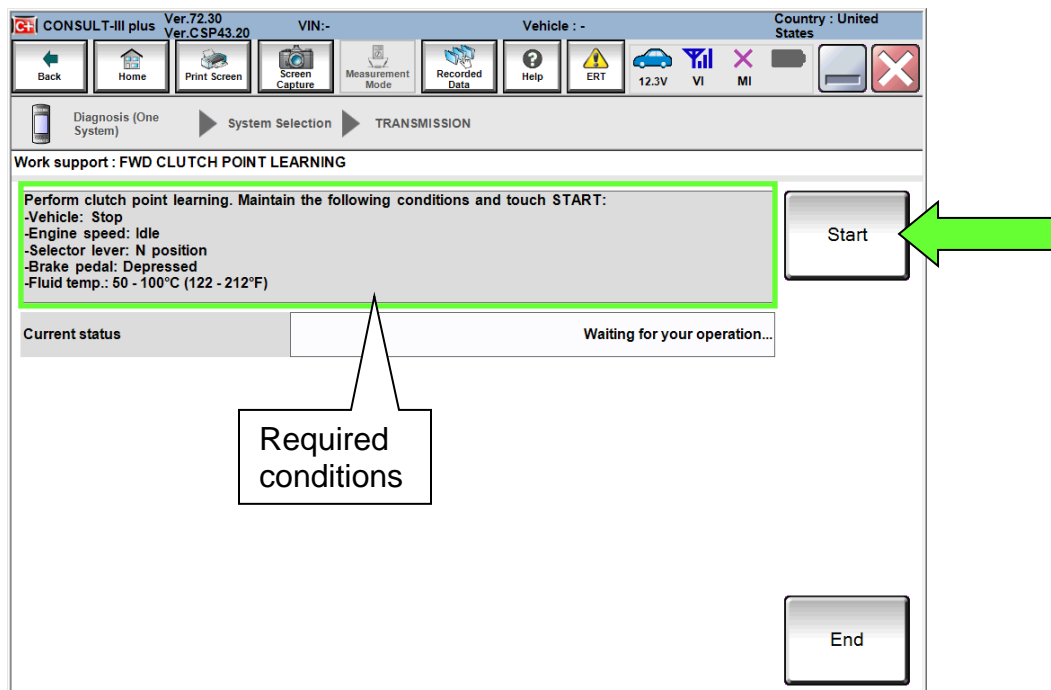


Figure 20J

11. While maintaining all conditions shown in Figure 20J and the “Current status” indicates “EXECUTING”, shift the CVT into **D** and then wait until the Current status indicates “COMPLETED”.

**NOTE:** This may take up to three (3) minutes to complete.

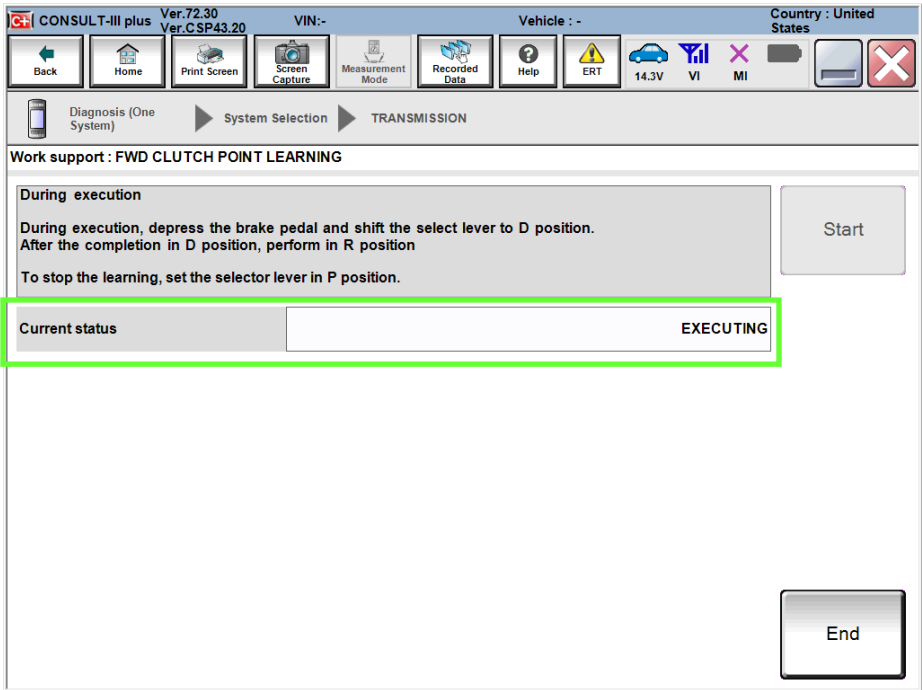


Figure 21J

12. When the screen in Figure 22J is displayed, select **End**.

13. Turn the engine OFF and then back ON.

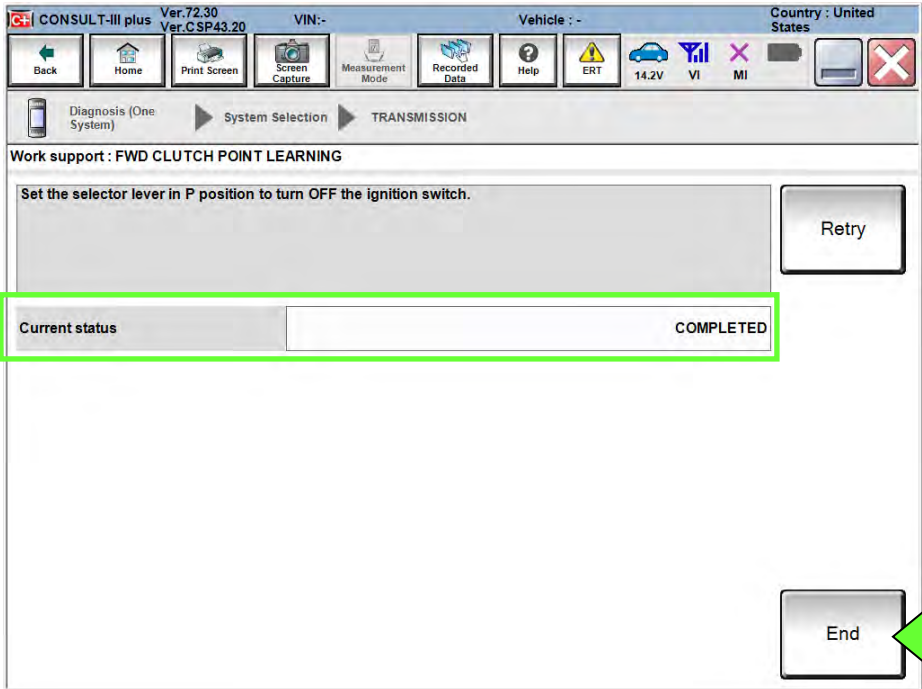


Figure 22J

14. Select **FWD CLUTCH POINT LEARNING** and then **Start**.

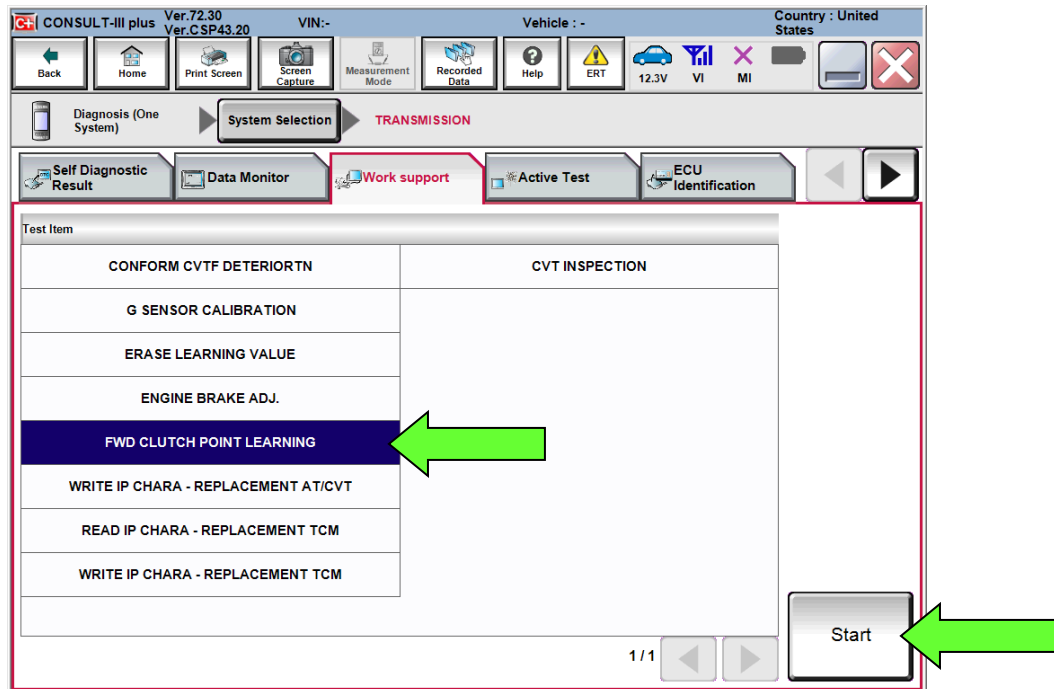


Figure 23J

15. With the engine still running and at idle, depress the brake pedal and shift the CVT into neutral (**N**).

- Confirm that all of the conditions indicated in Figure 24J are being met.

16. Select **Start**.

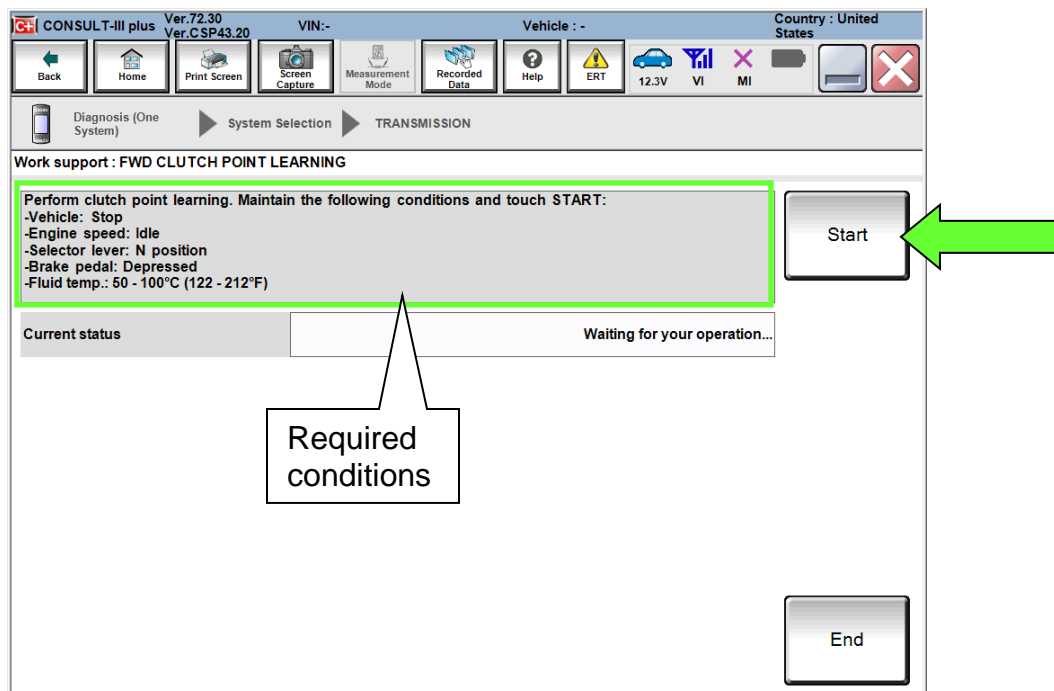


Figure 24J



17. While maintaining all conditions shown in Figure 24J and the Current status indicates EXECUTING, shift the CVT into **R** and then wait until the Current status indicates COMPLETED.

**NOTE:** This may take up to 3 minutes to complete.

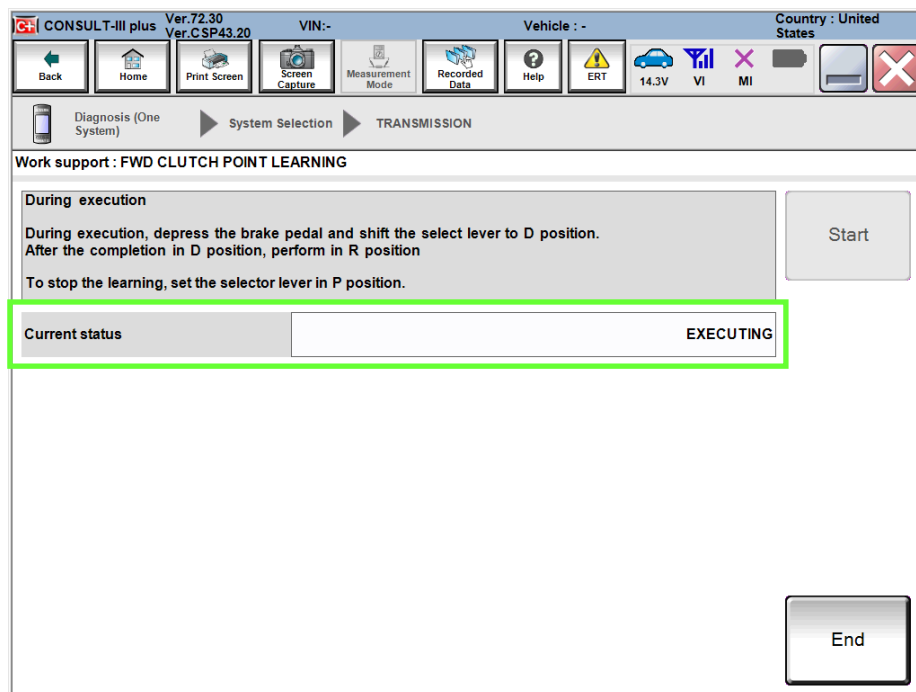


Figure 25J

18. When the screen in Figure 26J is displayed, select **End**.

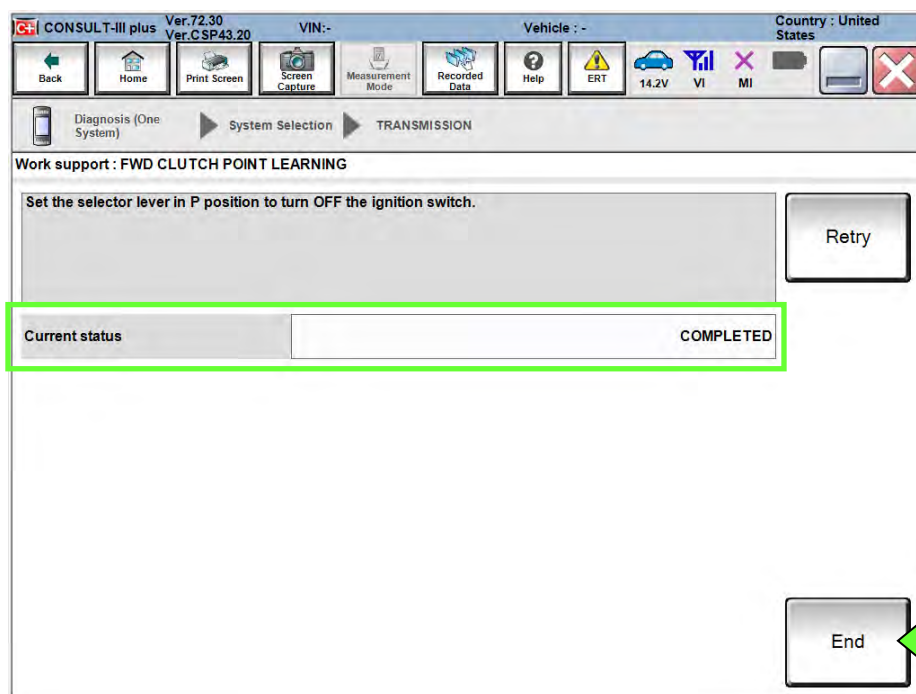


Figure 26J

## TROUBLE SHOOTING

### The Dummy Cover Will Not Sit Flush

If the dummy cover does not sit flush, the clutch pack may not be fully seated.

- Figure 1L shows clutch pack fully seated.
- Clutch pack is not fully seated if it is not below the surface that the dummy cover bolts to.
- Use instructions below to fully seat clutch pack.

**NOTE:** Always handle the clutch pack by the input shaft.

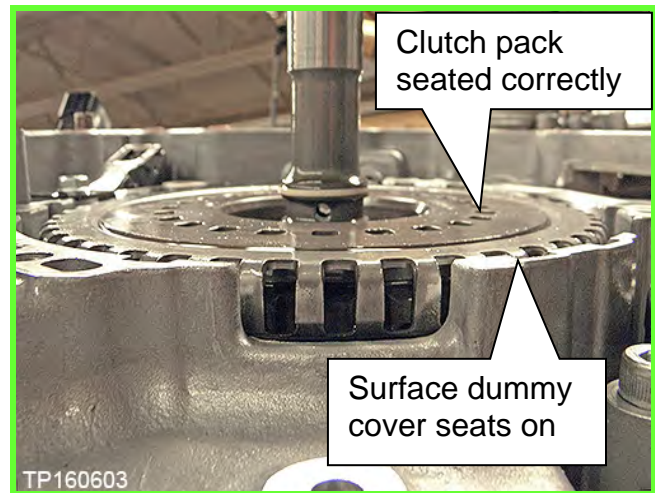


Figure 1L

1. Remove the dummy cover.

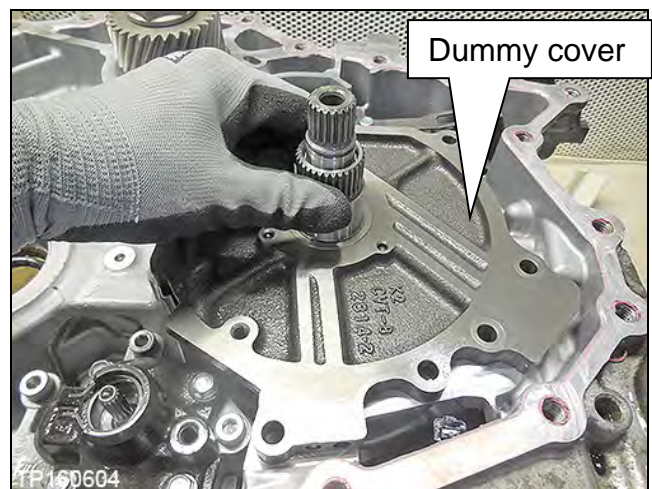


Figure 2L

2. Pull up the clutch pack by the input shaft to remove the entire clutch pack.
  - Make sure the O-ring is not installed at this time, or it could be damaged during reassembly.

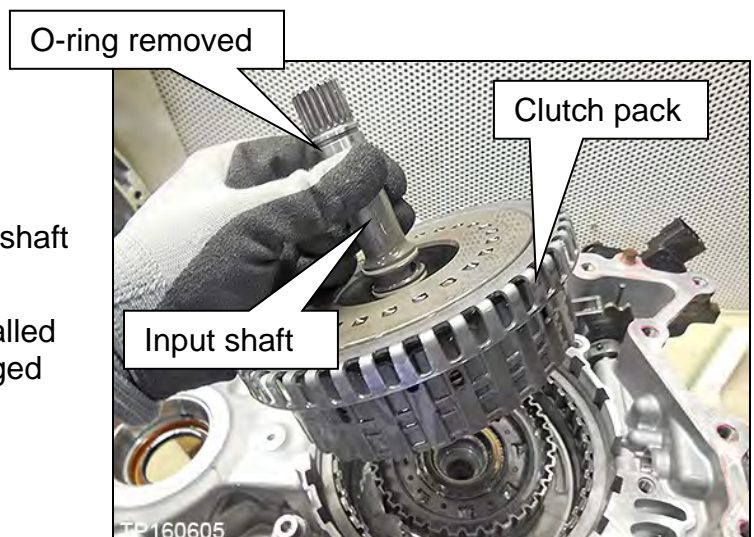


Figure 3L

3. Gently using an appropriate tool, align the layers of the clutch pack.
  - Bottom of the clutch pack shown in Figure 4L.

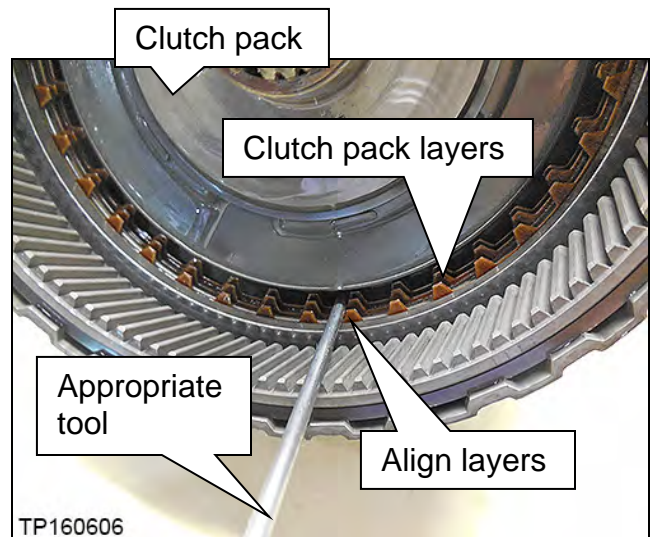


Figure 4L

4. Re-insert the entire clutch pack while holding the input shaft.
5. Gently jiggle the input shaft until the clutch pack seats below case lip.
6. If the clutch pack does not seat, rotate back and forth from the input shaft and jiggle.
7. If the clutch pack still does not seat, repeat from step 2.

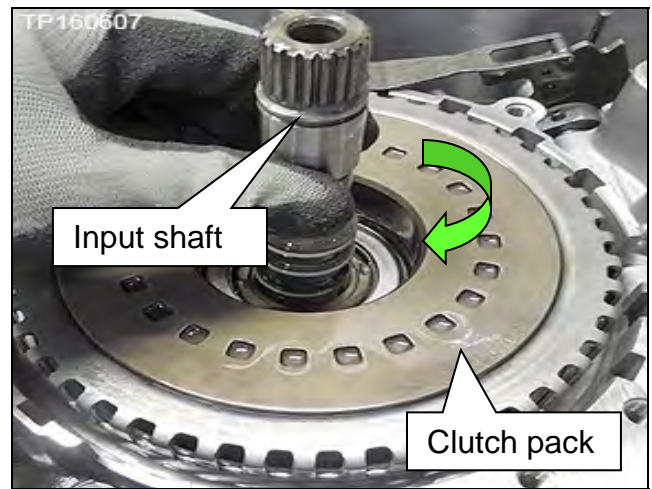


Figure 5L

## PARTS INFORMATION

REPAIR	DESCRIPTION	PART #	QUANTITY
Sub-assembly Repair	KIT-PULLEY	<b>See Table C below</b>	1
	CONTROL VALVE KIT (5)	3170E-29X9C	1
	SEAL-O RING (Transfer case to CVT AWD only)	33118-4BA0A	1
	SEAL-O RING	22180-9NB0A	2
	Loctite 5460 Sealant (1) (4)	999MP-LT5460P	(2) (3)
Control Valve Replacement	CONTROL VALVE KIT (5)	3170E-29X9C	1
Applies to all repairs	WASHER-DRAIN	11026-JA00A	1
	CLAMP	16439-7S01D	2
	SEAL-O RING (External Oil Cooler O-ring for <b>Pathfinder only</b> )	22180-9NB0A	2
	Transmission Cooler Cleaner	999MP-AM006P	As needed
	Nissan NS-3 CVT Fluid (1) (4)	999MP-NS300P	As needed
	Lens Swab packet (6)	J-51963	As needed

- (1) Nissan NS-3 CVT Fluid and Loctite 5460 Sealant can be ordered through the Nissan Maintenance Advantage program: Phone: 877-NIS-NMA1 (877-647-6621) or Website: Order via link on dealer portal [www.NNAnet.com](http://www.NNAnet.com) and click on the "Maintenance Advantage" link.
- (2) One container of Loctite 5460 Sealant is good for approximately 5 repairs. Sealant is not included in the kits.
- (3) Bill out Loctite 5460 Sealant (or equivalent) under **expense code 008**. Do not include the Loctite 5460 Sealant part number on the claim.
- (4) For warranty repairs, Nissan NS-3 CVT Fluid and Loctite 5460 Sealant **must** be used. For customer pay repairs, Nissan NS-3 CVT and Loctite 5460 Sealant Fluid or their equivalents are recommended.
- (5) Includes QR label, CD-R, and control valve assembly.
- (6) Shop supplies.

**Table C**

DESCRIPTION	MODEL	MODEL YEAR	PART NUMBER
KIT-PULLEY	Pathfinder	2013-2014	31214-29X7C
		2015-2017	31214-29X9B
	Altima (6 Cylinder)	2013-2014	31214-29X7A
		2015-2017	31214-29X8A
	Maxima	2016-2017	31214-29X8B
	Murano	2015-2017	31214-29X9A

**PARTS INFORMATION CONTINUED**

**THRUST BEARING (TYPE 1)**

DESCRIPTION	PART #: 31407-	BEARING THICKNESS	QTY
THRUST BEARING *	1XZOB	3.57	**
	1XZ0C	3.75	
	1XZ0D	3.93	
	1XZ0E	4.1	
	1XZ1A	4.28	
	1XZ1B	4.46	
	1XZ1C	4.61	
	1XZ1D	4.79	

\* Initially order one of each of the thrust bearings for dealer part stock. Refill single bearing parts as they are used for repairs.

\*\* As needed.

**BEARING RACE (TYPE 2)**

DESCRIPTION	PART #: 31435-	BEARING THICKNESS	QTY
RACE – BRG	3WX0A	0.6 mm	**
	3WX0B	0.8 mm	
	3WX0C	1.0 mm	
	3WX0D	1.2 mm	
	3WX1A	1.4 mm	
	3WX1B	1.6 mm	
	3WX1C	1.8 mm	

\*\* As needed.

**PARTS KITS REFERENCE TABLE (Parts are listed in order of installation)**

**IMPORTANT:** Check off parts as they are used and attach this to the repair order when finished.

CHECK OFF	DESCRIPTION	PART #	QUANTITY
	PUMP ASSY-OIL	31340-3WX0A	1
	SEAL-O RING (Pump fitting bolt)	31526-28X0C	1 (of 7)
	SEAL-O RING (Filter cover)	31526-3VX0A	1
	FILTER ASSY-OIL GOVENOR (CVT fluid filter)	31726-28X0A	1
	PULLEY ASSY-CVT (Sub-assembly)	2013-2014 Pathfinder	31209 29X8C
		2013-2014 Altima	31209 29X8A
		2015-2017 Altima & Murano	31209 29X9A
		2016-2017 Maxima & 2015-2017 Pathfinder	31209 29X9B
	CAP-GUIDE, CHAIN (Lubrication cap)	31268-3WX0A	2
	SEAL-O RING (O-ring between CVT case and side cover)	31526-28X0A	1
	Loctite 5460 Sealant	999MP-LT5460P	As needed
	BOLT (For sub-assembly side cover)	31377-1XZOB	19 (of 43)
	SEAL-O RING (Pulley retainer bolts)	31526-28X0C	6 (of 7)
	SEALOIL-DIFFER (Differential side oil seal; CVT case side)	38342-3WX0C	1
	<b>THRUST BEARING (Type 1)</b>	See page 62	1
	<b>RACE-BRG (TYPE 2)</b>	See page 67	1
	SEAL ASSY-OIL (Torque converter)	31375-1XF00	1
	SEAL OIL-DIFFER (Torque converter side, <b>front wheel drive only</b> )	38342-3WX0D	1
	SEAL-O RING (Input shaft)	31526-80X01	1
	Loctite 5460 Sealant	999MP-LT5460P	As needed
	BOLT (Torque converter housing)	31377-1XZOB	24 (of 43)
	SEAL-LIP (Between CVT and control valve)	31528-1XZ0A	1
	VALVE ASSY-CONTROL (Valve body)	31705-29X0C	1
	BAND (Zip tie for bracket)	24224-3VX0B	1
	BRACKET (Temperature sensor bracket)	31069-3VX0D	1
	STRAINER ASSY-OIL, AUTO TRANS	31728-29X0D	1
	GSKT-OIL PAN	31397-1XF0D	1
	WASHER-DRAIN (For drain plug)	11026-JA00A	1
	SEAL-O RING (Speed Sensor)	31526-1XG0C	1
	SEAL-O RING (CVT filler plug at converter housing)	31526-3VX0B	1
	Nissan NS-3 CVT Fluid	999MP-NS300P	As needed
	SEAL-O RING (Transfer case to CVT. AWD only)	33118-4BA0A	1
	SEAL-O RING (External Oil Cooler O-ring for <b>Pathfinder only</b> )	22180-9NB0A	2
	Complete CVT Flush Procedure		
	Perform ADDITIONAL SERVICE WHEN REPLACING CONTROL VALVE (page 92)		

## CLAIMS INFORMATION

### IF DTC P17F1 is stored and Sub-Assembly is replaced

Submit a Primary Part (PP) type line claim using the following claims coding:

OPERATION	PFP	OP CODE	SYM	DIAG	FRT
CVT R&R	(1)	JD01AA	ZE	32	(2)
		JD023A			
Inspect CVT Chain, Chain = NG (Includes control valve R&I)		JX36AA			2.4
Replace CVT Sub-assembly MY13-14 Pathfinder, MY16-17 Maxima or MY13-17 Altima V6		JX45AA			3.2
Replace CVT Sub-assembly MY15-17 Pathfinder or MY15-17 Murano		JX53AA			3.4

(1) Reference the Parts Information Table (Table C on Page. 100) and use the applicable Belt and Pulley Assembly Part Number as the Primary Failed Part.

(2) Reference the current Nissan Warranty Flat Rate Manual and use the indicated Flat Rate Time.

**NOTE:** FRT allows adequate time to access DTC codes. No other diagnostic procedures subsequently required. Do NOT claim any diagnostic OP Codes with this claim.

### EXPENSE CODE

EXPENSE CODE	DESCRIPTION	MAX AMOUNT
008	Sealant	\$12.46

OR

### IF DTC P17F0 is stored and Sub-Assembly is replaced

Submit a Primary Part (PP) type line claim using the following claims coding:

OPERATION	PFP	OP CODE	SYM	DIAG	FRT
CVT R&R	(1)	JD01AA	ZE	32	(2)
		JD023A			
Replace CVT Sub-assembly (Includes control valve R&I) MY13-14 Pathfinder, MY16-17 Maxima, or MY13-17 Altima V6		JX50AA			4.0
Replace CVT Sub-assembly (Includes control valve R&I) MY15-17 Pathfinder or MY15-17 Murano		JX54AA			4.2

(1) Reference the Parts Information Table (Table C on Page. 100) and use the applicable Belt and Pulley Assembly Part Number as the Primary Failed Part.

(2) Reference the current Nissan Warranty Flat Rate Manual and use the indicated Flat Rate Time.

**NOTE:** FRT allows adequate time to access DTC codes. No other diagnostic procedures subsequently required. Do not claim any diagnostic OP codes with this claim.

### EXPENSE CODE

EXPENSE CODE	DESCRIPTION	MAX AMOUNT
008	Sealant	\$12.46

Proceed to the next page for additional claims information.

Claims information continued.

**OR**

**If DTC P17F1 is stored and Control Valve is replaced (chain inspection shows no signs of chain slip, OK):**

**Submit a Primary Part (PP) type line claim using the following claims coding:**

<b>OPERATION</b>	<b>PFP</b>	<b>OP CODE</b>	<b>SYM</b>	<b>DIAG</b>	<b>FRT</b>
Inspect CVT Chain, Chain = <b>OK</b>	(1)	JX37AA	ZE	32	0.3
Replace Valve Body		JD48AA			(2)

(1) Reference the Parts Information Table and use the applicable Control Valve Kit part number (3170E-29X9C) as the Primary Failed Part.

(2) Reference the current Nissan Warranty Flat Rate Manual and use the indicated Flat Rate Time.


**NOTE:** FRT allows adequate time to access DTC codes. No other diagnostic procedures subsequently required. Do NOT claim any diagnostic OP Codes with this claim.




### Type 1 and Type 2 Additional Reference Images

TYPE 1	TYPE 2
2013-2014 Pathfinder	2015-2017 Pathfinder
2016-2017 Maxima	2015-2017 Murano
2013-2017 Altima (6 Cylinder Only)	


**Type 1**

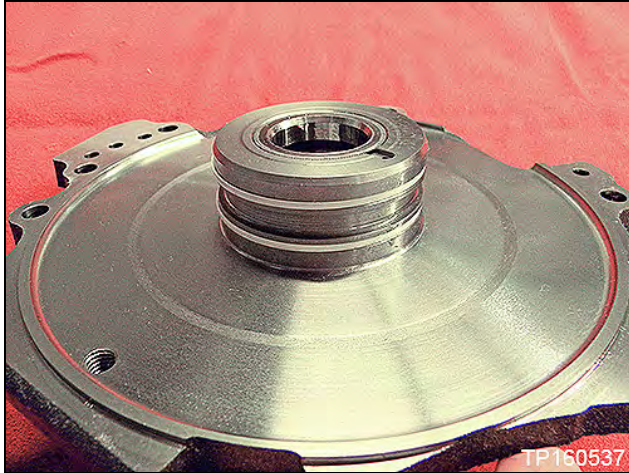

**Type 2**

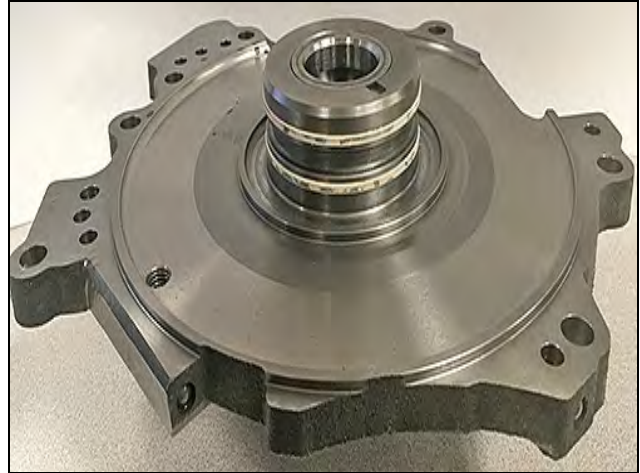


**Type 1**

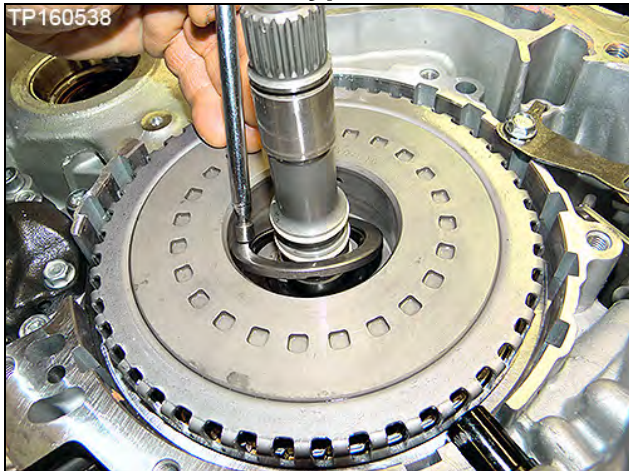


**Type 2**




**Type 1**

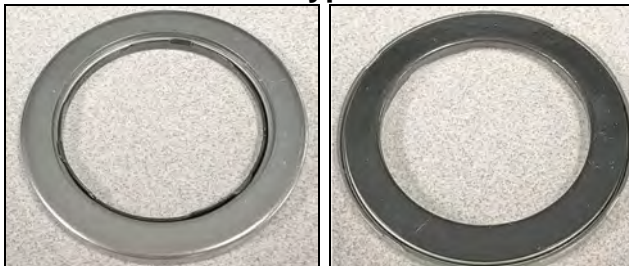

**Type 2**

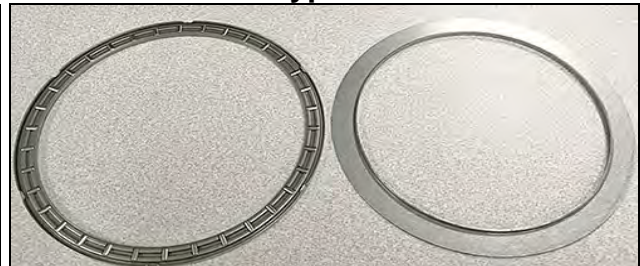

**Type 1**

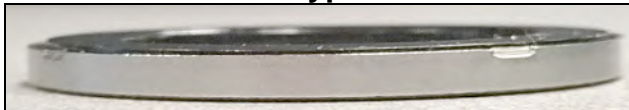

**Type 2**

