

Technical product information

Topic	Front brake squeal - 1.5 KHz to 2.0 KHz
Market area	Bentley; worldwide (2WBE)
Brand	Bentley
Transaction No.	2054862/8
Level	EH
Status	Approval
Release date	

New customer code

Object of complaint	Complaint type	Position
running gear -> brake system	noise, vibration	

Vehicle data

Bentayga series

Sales types

Type	MY	Brand	Designation	Engine code	Gearbox code	Final drive code
4V1*	2017	E		*	*	*
4V1*	2018	E		*	*	*
4V1*	2019	E		*	*	*
4V1*	2020	E		*	*	*
4V1*	2021	E		*	*	*

Documents

Document name
master.xml

Customer statement / workshop findings

Front brake squeal with a frequency of 1.5 KHz to 2.0 KHz

Technical background

Modified front brake Callipers and modified front brake disc guard plates are available on receipt of a qualifying DISS query

Referring to Figure 1, the replacement front callipers have a Dynamic absorber fitted (A), the brake disc guard plates (B) are pre modified to fit around the absorber

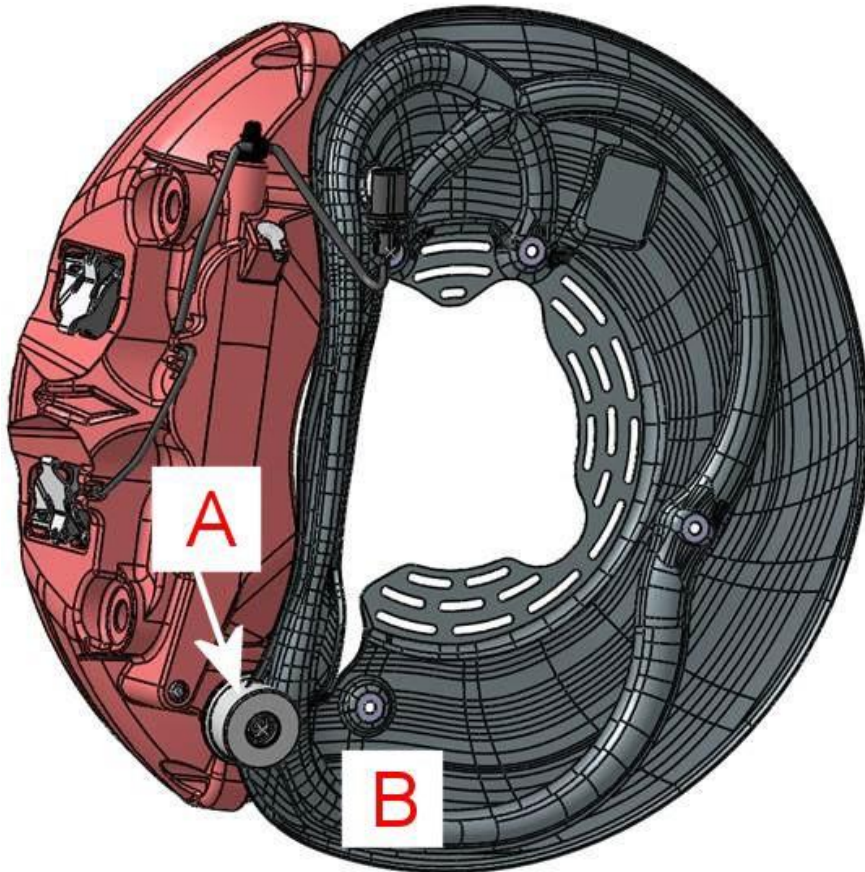


Figure 1

Revision history

2054862/7 - Parts information section has been updated (part numbers added for the left and right brake disc guard plates)

2054862/8 - Frequency range has been changed from 1.8 KHz to 1.9KHz

To

1.5 KHz to 2.0 KHz

Production change

Not applicable

Measure

1) Refer to Brake Noise Identification TPI 2052785/- and supply a recording and confirmation of the brake squeal including frequency

Refer to the Bentley Hub (Reference TPI 2054862/-) for an example of the specific brake noise

- Confirm the brake components are in a serviceable condition

Should the brake discs or brake pads not be in a serviceable condition this must be amended and retested to confirm if the squeal is still evident before replacing the brake callipers and brake disc guard plates

Normal Warranty and Elsa pro guidelines apply regarding brake disc and pad replacement

IMPORTANT: For frequency analysis the noise recording equipment Bentley Motors recommends is - Chassis ear tool WT 10437

- If the sound recording produces a frequency of 1.5 KHz to 2.0 KHz and the brake components are in a serviceable condition carry out the onward instructions
- *NOTE: Within this procedure there are single use items, please ensure you have stock of the suggested parts prior to starting the procedure – Refer to applicable repair manual chapters and the ETKA parts catalogue*

Removal of original components

2) Remove both front brake callipers and brake pads - Refer to Repair manual Rep.Gr 47

- Remove both front brake discs - Refer to Repair manual Rep.Gr 46
- Remove both front brake disc guard plates - Refer to Repair manual Rep.Gr 46

Should the brake discs and/or brake pads not be in a serviceable condition the applicable parts must be replaced NOTE: Normal Warranty and Elsa pro guidelines apply regarding brake disc and pad replacement

Fitting the replacement modified components

3) Fit both front brake disc guard plates - Refer to Repair manual Rep.Gr 46

- Fit both front brake discs - Refer to Repair manual Rep.Gr 46
- Fit the replacement front brake callipers and brake pads - Refer to Repair manual Rep.Gr 47
- Referring to Figure 2, once fitted check and confirm the disc guard plates are not touching the brake calliper Dynamic absorber

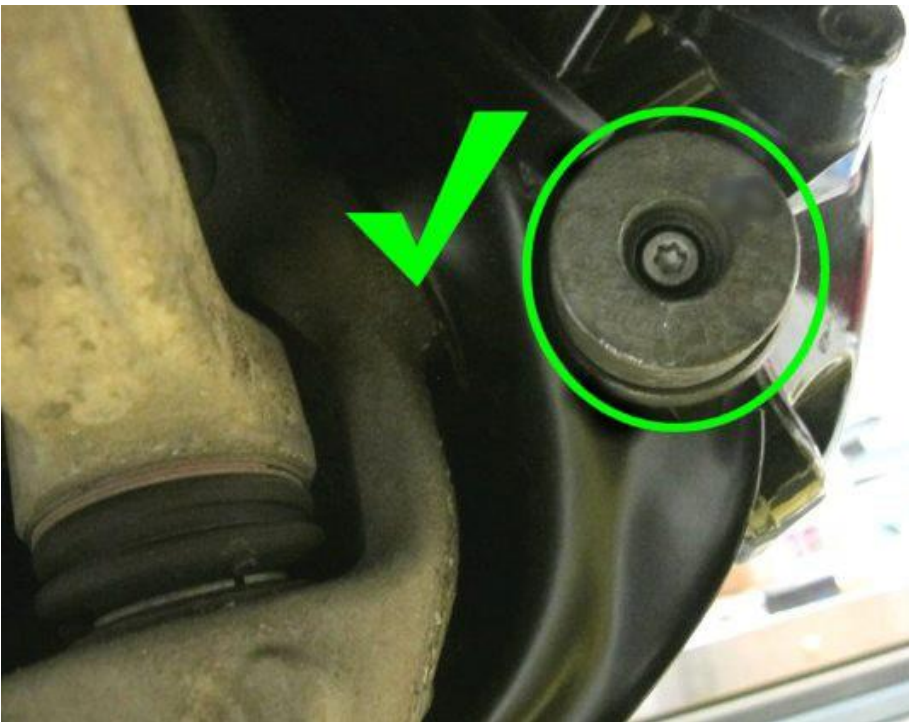


Figure 2

Warranty accounting instructions

Right and Left hand front - Guard plate and Calliper removal and refitting Warranty Type 110 or 910

Damage Service Number 47 39

Damage Code 00 20

Labour

Labour Operation Code 47 39 42 00

Time 190 Time units

Frequency diagnosis including road test

Labour

Labour Operation Code 47010100

Time 80 Time units (includes road test 01 21 00 00 - 50 Time units)

Parts information

Description	Part Number
Left brake disc guard plate	36A615311A
Right brake disc guard plate	36A615312A
Right hand calliper (Black)	36A615108D
Left hand calliper (Black)	36A615107D
Right hand calliper (Red)	36A615108E
Left hand calliper (Red)	36A615107E
Disc guard plate fixings	Refer to ETKA
Front Calliper fixings	Refer to ETKA